


**EOS-1D X Mark II無線連接至智能手機（需配合傳輸器WFT-E6D或WFT-E8D）**  
**EOS-1D X Mark II wireless connect with smartphone (require transmitter WFT-E6D or WFT-E8D)**

1. 安裝傳輸器，然後開啟相機  
Attach the transmitter, and then turn on the camera



2. 在相機上，按下<MENU>按鈕。在 [  3 ] 設定頁下，選擇 [ 通訊設定 ]  
On the camera, press the <MENU> button. Under the [  3 ] tab, select [communication settings]

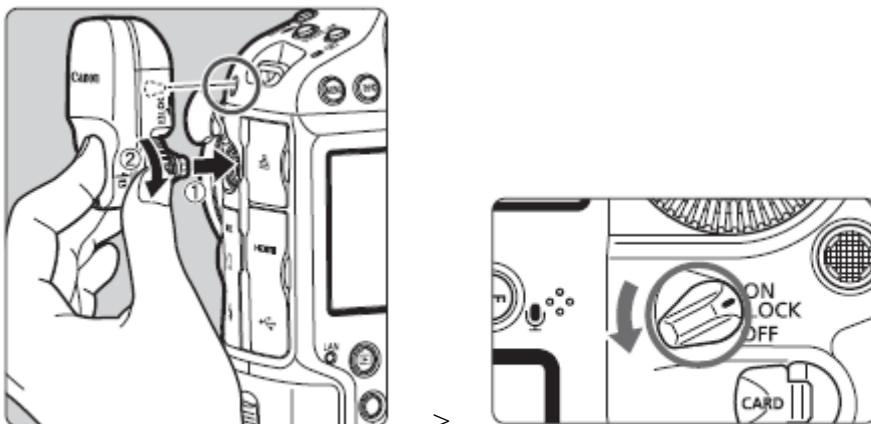

3. 選擇 [ 通訊功能 ] 中的 [ 啟用 ]  
Select [Enable] in [Communication func]



4. 選擇 [網路設定]

Select [Network settings]



5. 選擇 [連接設定]

Select [Connection settings]



6. 選擇 [SET\*]

Select [SET\*]



7. 選擇 [連接精靈]

Select [Connection wizard]



=

8. 選擇通訊方法為 [智能手機]，然後選擇 [確定]

Select [Smartphone], and then select [OK]



=

9. 選擇 [無線]，然後選擇 [確定]

Select [Wireless], and then select [OK]




10. 選擇 [簡易連接]，然後選擇 [確定]  
Select [Easy connection], and then select [OK]



11. 啟動智能手機的Wi-Fi功能，然後選擇相機螢幕上顯示的SSID；而密碼請輸入相機螢幕上顯示的加密金鑰  
Activate the Wi-Fi function of the smartphone, then select the SSID (network name) displayed on the camera's LCD monitor; for the password, enter the encryption key on the camera's LCD monitor.

### SSID(網路名稱)

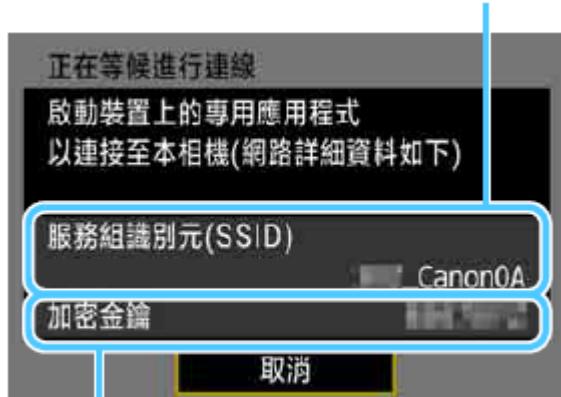


### 加密金鑰(密碼)

12. 在智能手機 / 平板電腦上啟動Camera Connect  
Start Camera Connect on the smartphone




13. 在智能手機上選擇要連接的相機

Select the camera to connect to on the smartphone

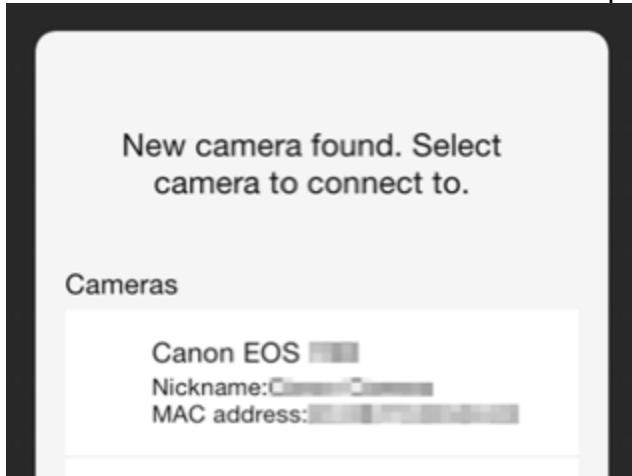

14. 回到相機，下方畫面會出現在相機的液晶螢幕中，請選擇 [確定]

Back to camera, the screen below will appear on the camera's LCD monitor. Please select [OK]

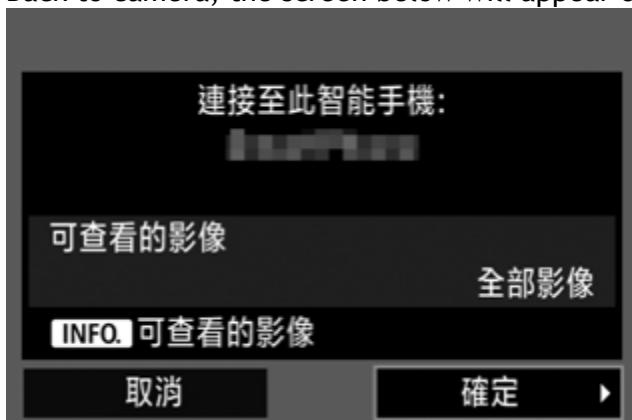


15. 選擇 [確定]

Select [OK]



16. 智能手機出現下圖畫面，與相機連接的設定到此完成

The screen below will appear on the Smartphone, the setting for connecting to camera is now completed

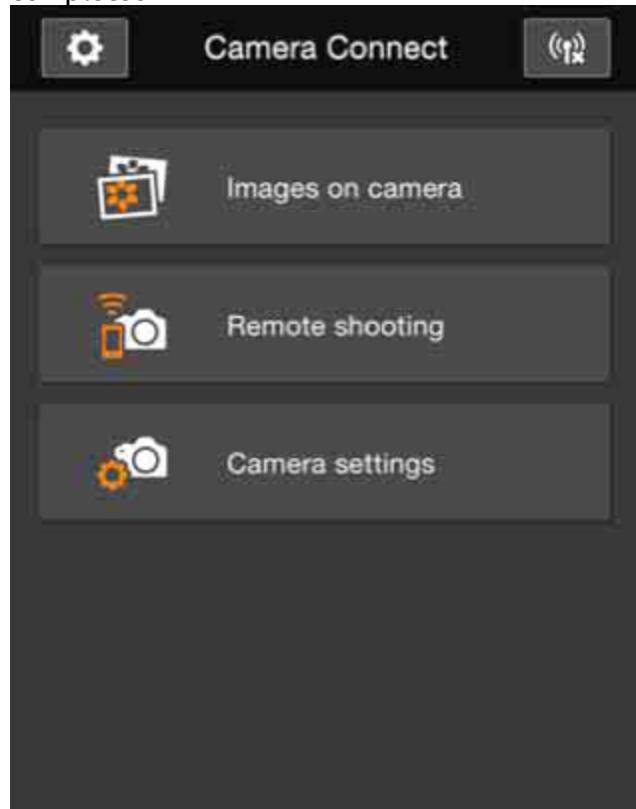

-完-  
-End-