

在 Mac OS 以 Wi-Fi 連接安裝 G5070 驅動程式步驟 G5070 printer driver Installation Guide for Mac OS via Wi-Fi


*請開啟打印機並確保電腦已連接互聯網

*Please turn on the printer and make sure computer already connected to the internet


連接印表機至無線網路路由器

Connect printer to Wi-Fi router


1. 確保在開始無線連接設定之前，印表機已開啟。
如果電源開啟，**電源(ON)**指示燈(A)將亮起或閃爍。
Make sure printer is turned on before starting wireless connection setup.
If the power is on, the **ON** lamp (A) will be lit or flashing.

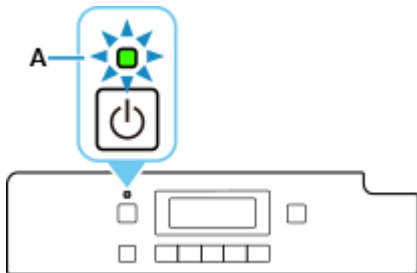


2. 如果顯示以下螢幕，請按**停止(Stop)**按鈕(B)。
如果未顯示以下螢幕，請繼續執行下一步。
If the screen on the below appears, press the **Stop** button (B).
If the following screen is not displayed, proceed to the next step.

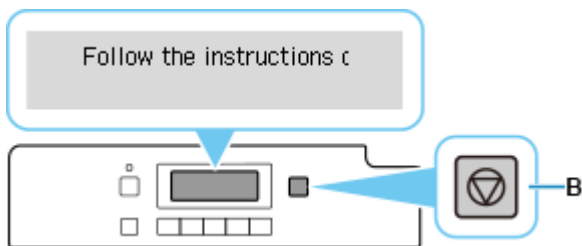


3. 按**設定(Setup)**按鈕(A)。
Press the **Setup** button (A).

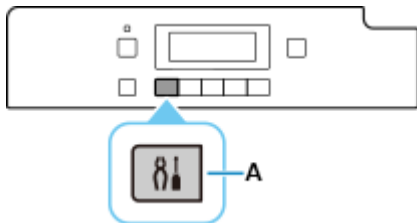


4. 使用 ◀ 或 ▶ 按鈕(B)選擇 **Wi-Fi 設定(Wi-Fi setup)**並按 **OK** 按鈕。
Use the ◀ or ▶ button (B) to select **Wi-Fi setup** and press the **OK** button.

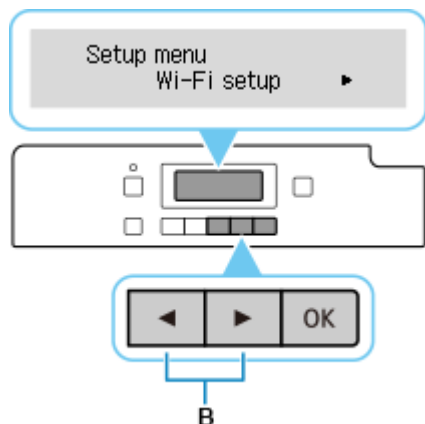

5. 選擇**手動連接(Manual connect)**並按 **OK** 按鈕。
Select **Manual connect** and press the **OK** button.



6. 選擇無線路由器並按 **OK** 按鈕。
Select your wireless router and press the **OK** button.



如果顯示其他螢幕或未發現無線路由器，請參見「[疑難排解](#)」。

If a different screen appears or no wireless router is found, see "[Troubleshooting](#)."

7. 按 **OK** 按鈕。
Press the **OK** button.




8. 輸入密碼。文字輸入區分大小寫。

Enter the password. Text entry is case-sensitive.

關於如何輸入字元和如何變更字元類型，請參見「[文字輸入](#)」(在新視窗中顯示)。

For how to enter characters and how to change the character type, see "[Text Entry](#)" (appears in a new window).



如果不知道所用無線路由器的密碼，請參見無線路由器手冊或聯絡其製造商。

如果出現「**已連接(Connected)**」，則網路不需要密碼。

If you don't know the password for your wireless router, see the wireless router manual or contact its manufacturer.

If "**Connected**" appears, the network does not require a password.

9. 輸入後，按住 **OK** 按鈕至少 2 秒鐘。

After entry, press and hold the **OK** button for at least two seconds.


10. 選擇**是(Yes)**並按 **OK** 按鈕。

Select **Yes** and press the **OK** button.



11. 顯示下方的螢幕時，請按 **OK** 按鈕。

When the screen on the below appears, press the **OK** button.




如果顯示其他螢幕，請參見「[疑難排解](#)」。

If a different screen appears, see "[Troubleshooting](#)."

12. 按**設定(Setup)**按鈕。

Press the **Setup** button.

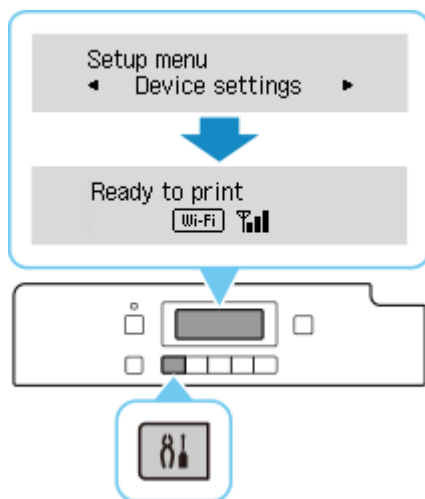

網路連接設定完成。

連接完成後，螢幕上會顯示 **Wi-Fi**。

The network connection setup is now complete.



When connection is complete, **Wi-Fi** appears on screen.

Mac安裝步驟

Mac installation procedure

1. 在Mac電腦上，點選左上角的蘋果圖示，選擇**系統偏好設定**>**印表機與掃描器**，再點選左下角的「+」進入下圖的新增印表機視窗。選擇印表機「Canon G5000 Series」（種類為Bonjour），確定「使用」為「Secure AirPrint」，然後按「加入」

On the Mac system, click the Apple icon on the top left corner, then choose “**System Preferences**” > “**Printers and Scanners**”. Click the “+” icon on the bottom left corner, then choose name as “Canon G5000 series” (Kind: Bonjour), and make sure “Secure AirPrint” in “Use” column , and then click “Add”

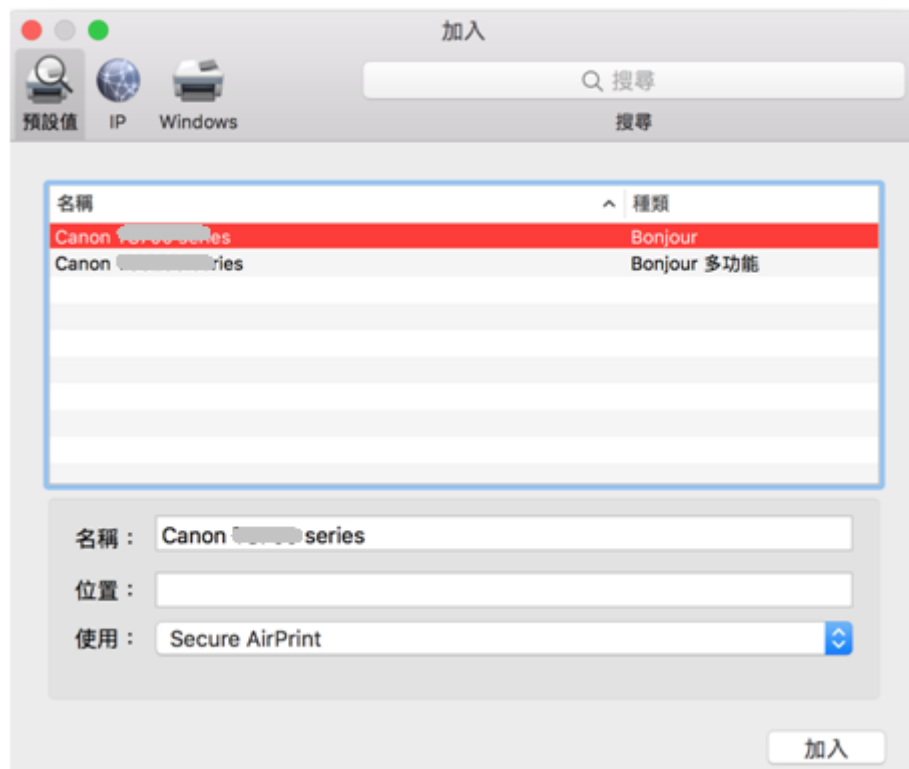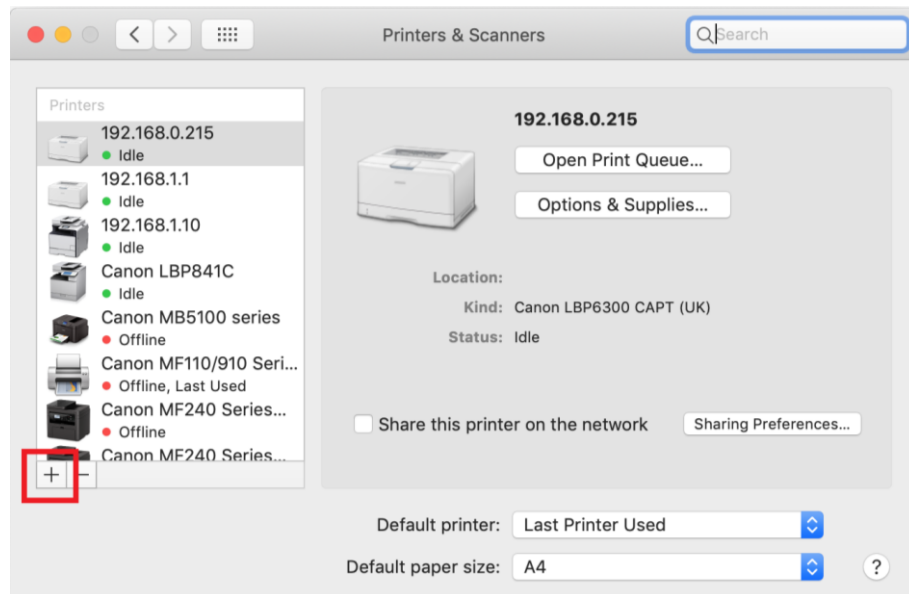

-完-

-End-