


LBP8780x 安裝 MAC OS 10.11 透過 LAN 連線連接印表機之驅動程式步驟
The Driver installation procedure for LB8780x (Via LAN) in MAC OS 10.11


*** 以下安裝步驟以 LBP7780Cx 作示範

*** The below procedure uses LBP7780Cx as example

1. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20LBP8780x/model>，選擇相關的印表機型號及下載印表機的驅動程式 - UFR II/UFRII LT Printer Driver & Utilities for Macintosh
(Go to: <https://hk.canon/en/support/imageCLASS%20LBP8780x/model>, then download the printer driver - UFR II/UFRII LT Printer Driver & Utilities for Macintosh)
2. 開啟下載檔案「UFRII LT Printer Driver」，進入「SFP」文件夾(Open “UFRII LT Printer Driver”, then open “SFP”)

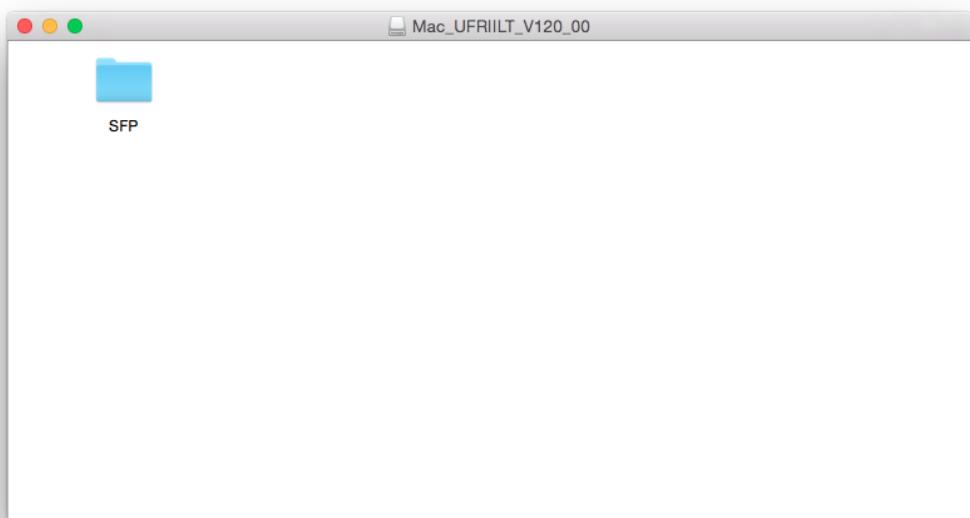

3. 開啓“UFRII_LT_***.pkg”文件開始安裝設定 (Double Click / Open “UFRII_LT_***.pkg”)

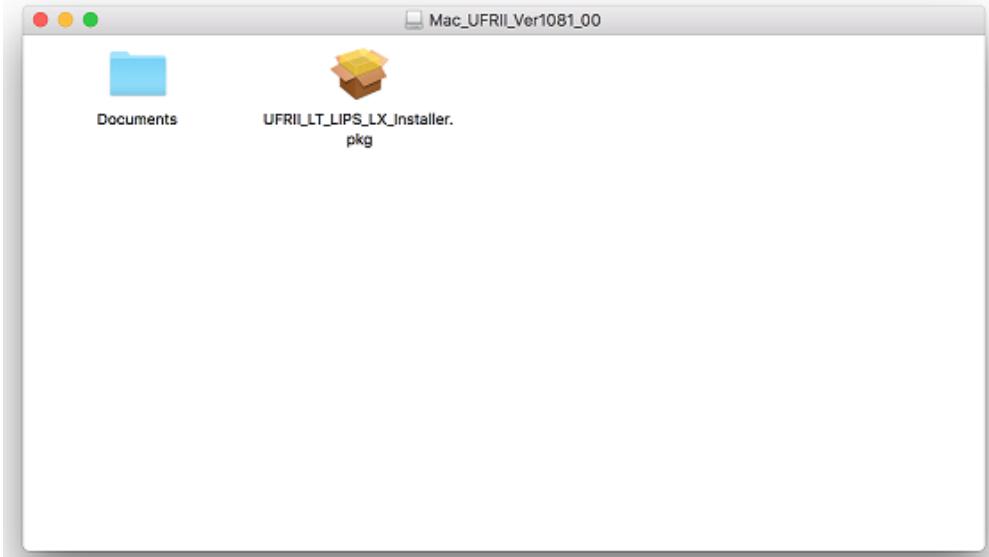

4. 按「繼續」(Press “Continue”)




5. 按「繼續」(Press “Continue”)




6. 如出現以下畫面，按「同意」 (Press “Agree”)



7. 按「安裝」 (Press “Install”)

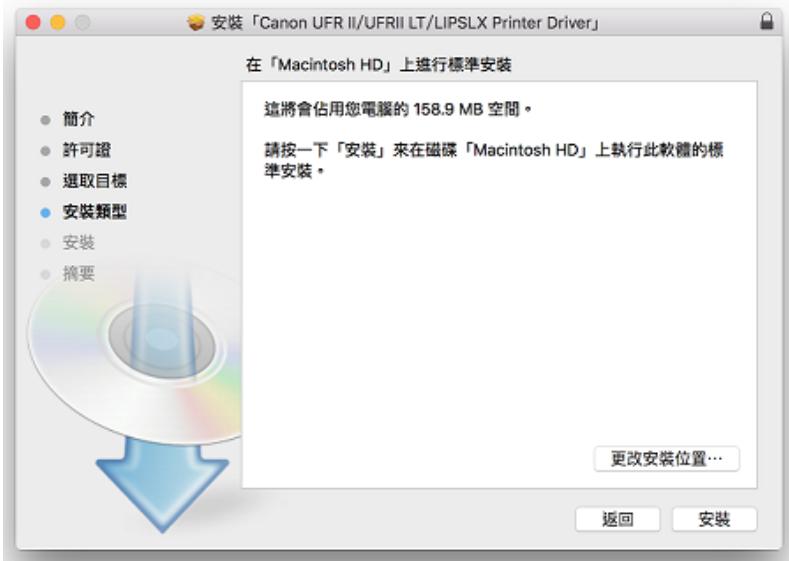

8. 如出現以下畫面，請輸入登入密碼 (Enter the login password)

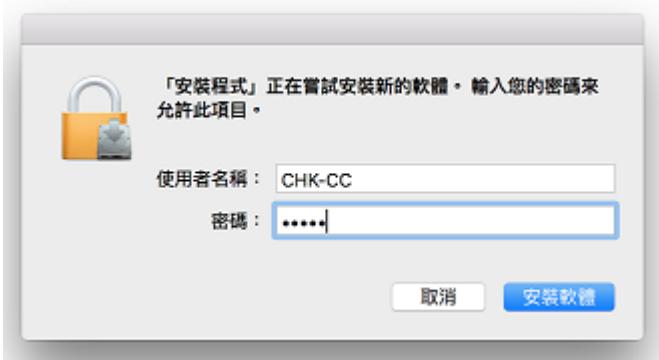

9. 按「關閉」繼續安裝 (Press “Close” to continue driver installation)



10. 完成安裝驅動程式後需新增印表機，按一下電腦左上角 < > 圖案，選擇 < 系統偏好設定 >，再選擇 < 印表機和掃描器 > (Printers & Scanners)。(Click the top left corner of the computer < > icon, select <System Preferences>, and then select <Printers and Scanners>)



11. 於〔列印和掃描器 (Printers & Scanners)〕視窗，按一下「+」按鈕加入印表機。
(In the [Printers & Scanners] window, click the "+" button to register the printer)



12. 位址輸入自訂的 IP 位址 (Enter IP address)




13. IP 位址輸入後，名稱會顯示 IP 位置，「使用」選擇「選擇軟體」。


Enter IP address, "Name" will show the IP address, "Use" selects "Select Software"



14. 輸入 8780 以搜尋「LBP8780x」，按「好」，再按加入 (type “8780”, then choose “Canon LBP8780x”), press “Yes”

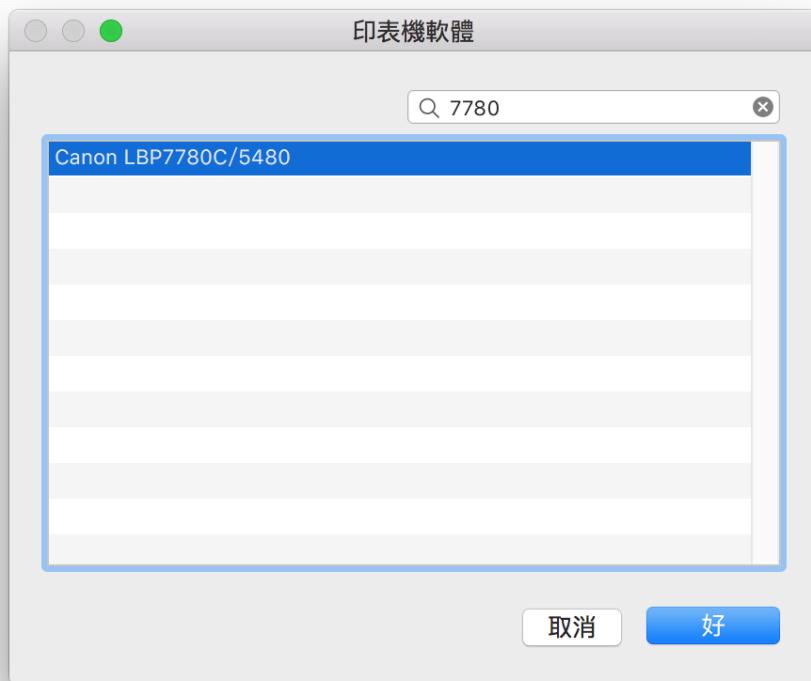

13. 新增印表機完成，驅動程式安裝完畢。(After the printer is added, driver installation is completed.)

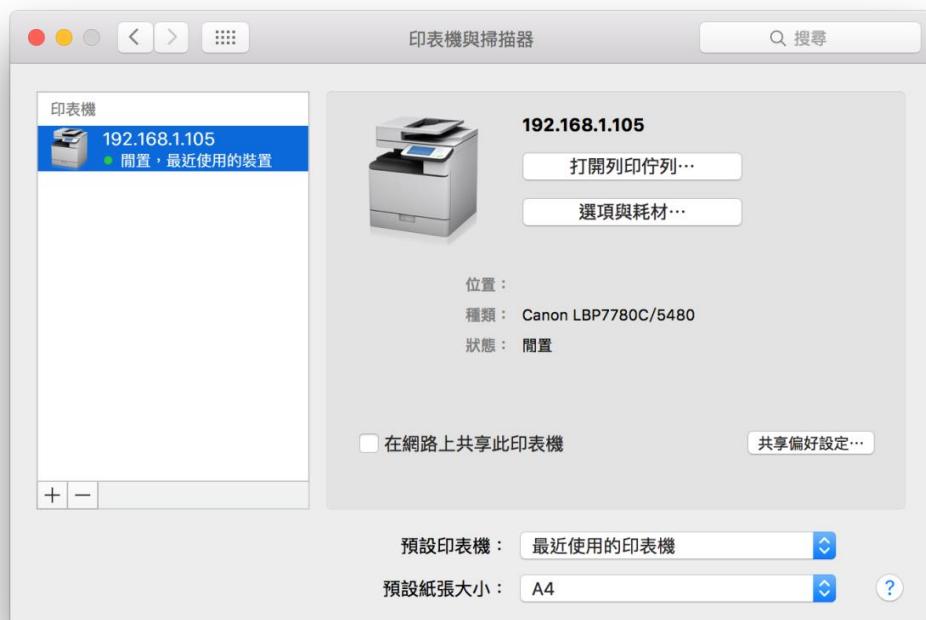

<完>
<END>