


透過無線網路連接安裝 MF416dw 印表機的驅動程式步驟 (以 Win 10 作示範)


MF416dw printer driver Installation Guide for Windows via Wi-Fi connection (Win 10 as example)

1. 開啟印表機，於印表機主畫面上點選「功能表」
Turn on printer, tap “Menu” on printer home screen.
2. 點選「網絡設定」
Tap “Network Settings”
3. 點選「無線區域網路設定」(如顯示「是否啟用無線區域網路？」，點選「是」)
Tap “Wireless LAN Settings” (If the “Do you want to enable the wireless LAN?” message is displayed, tap “Yes”)
4. 閱讀顯示的訊息，點選「確定」
Read the message that is displayed, tap “OK”


5. 點選「SSID 設定」
Tap “SSID Settings”



6. 點選「選擇存取點」
Tap “Select Access Point”

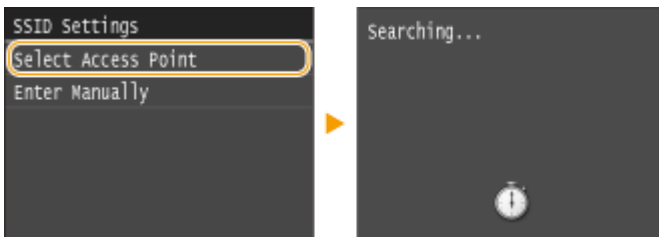


7. 選擇無線網路名稱
Select a wireless network name



8. 使用數字鍵輸入 Wi-Fi 密碼，點選「套用」

Enter the Wi-Fi password using the numeric keys, tap “Apply”

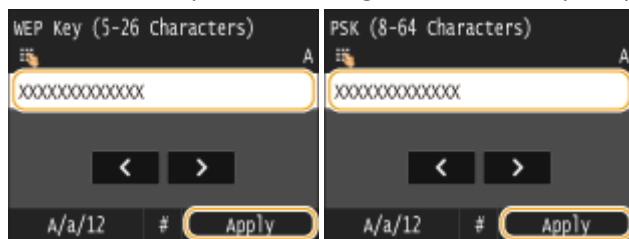

9. 點選「是」

Tap “Yes”




10. 檢查控制面板上的 Wi-Fi 指示燈是否閃爍

當偵測到無線網路，Wi-Fi 指示燈會閃爍

Check that the Wi-Fi indicator is blinking on the operation panel.

The Wi-Fi indicator blinks when a wireless network is detected.

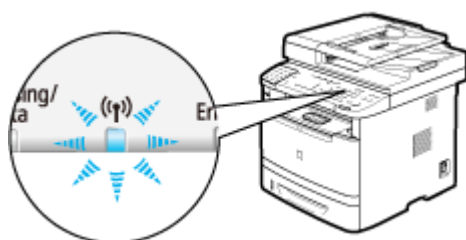


當設定完成，會顯示以下畫面，約 2 秒後 Wi-Fi 指示燈會亮起

When the setup is completed, the screen below is displayed, and approximately 2 seconds later, the Wi-Fi indicator lights up



11. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式
Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver

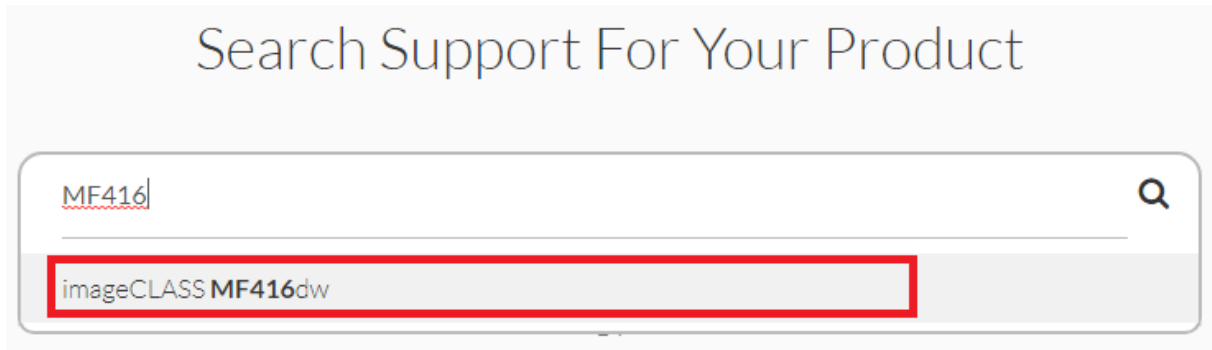

12. 選擇並下載以下檔案

Choose and download below files:

- 打印機驅動程式 / Printer Driver

[\[Windows xxbit\] imageCLASS MF419dw/MF416dw MFDivers \(UFR II / PCL / PS3 / FAX / ScanGear\)](#)

- 掃描程式 / Scanner Software

[\[Windows 32bit & 64bit\] MF Scan Utility Ver.1.x.0.0](#)

13. 下載完成後，打開驅動程式安裝檔案


Open driver installation file after downloaded

14. 按「Next >」


Click "Next >"




15. 按「Yes」
Click “Yes”

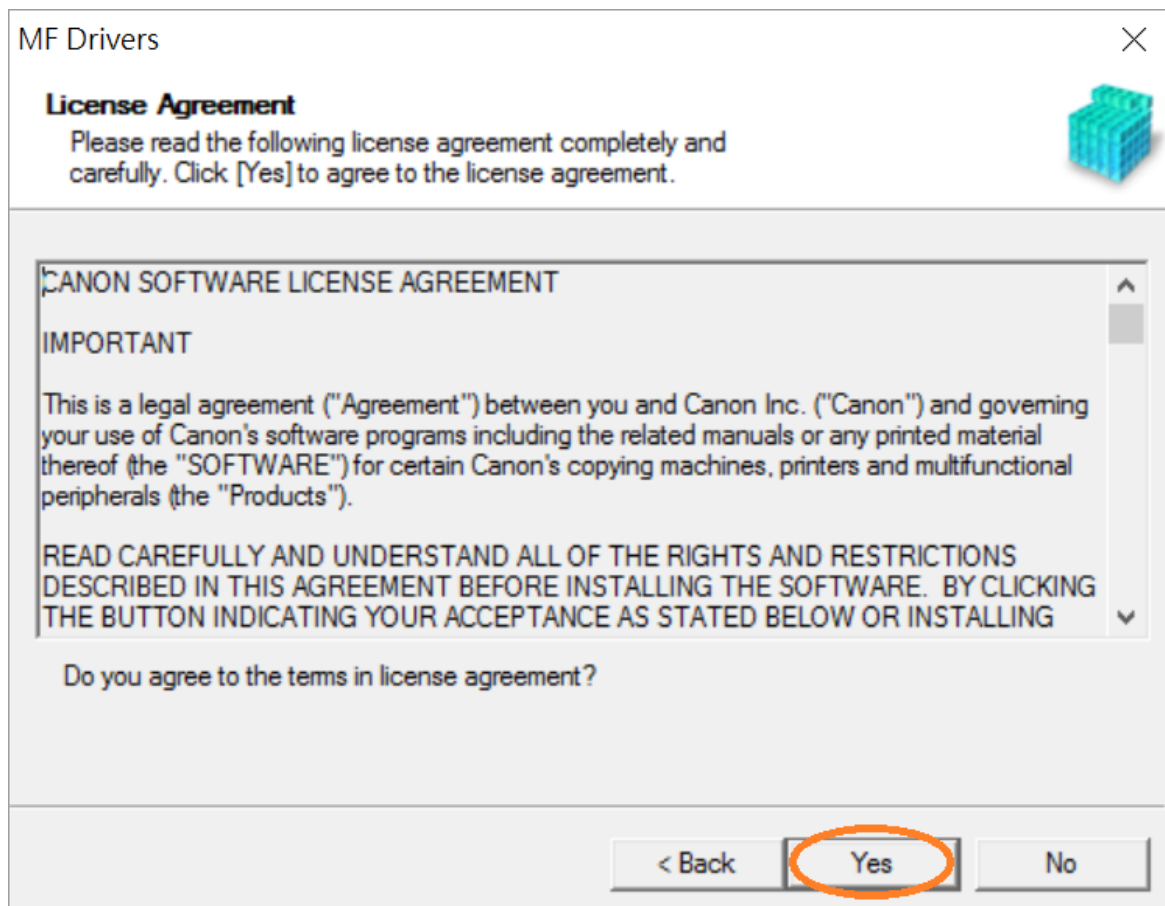


16. 選擇「Network Connection (for Network Models)」，按「Next >」
Select “Network Connection (for Network Models)”, click “Next >”

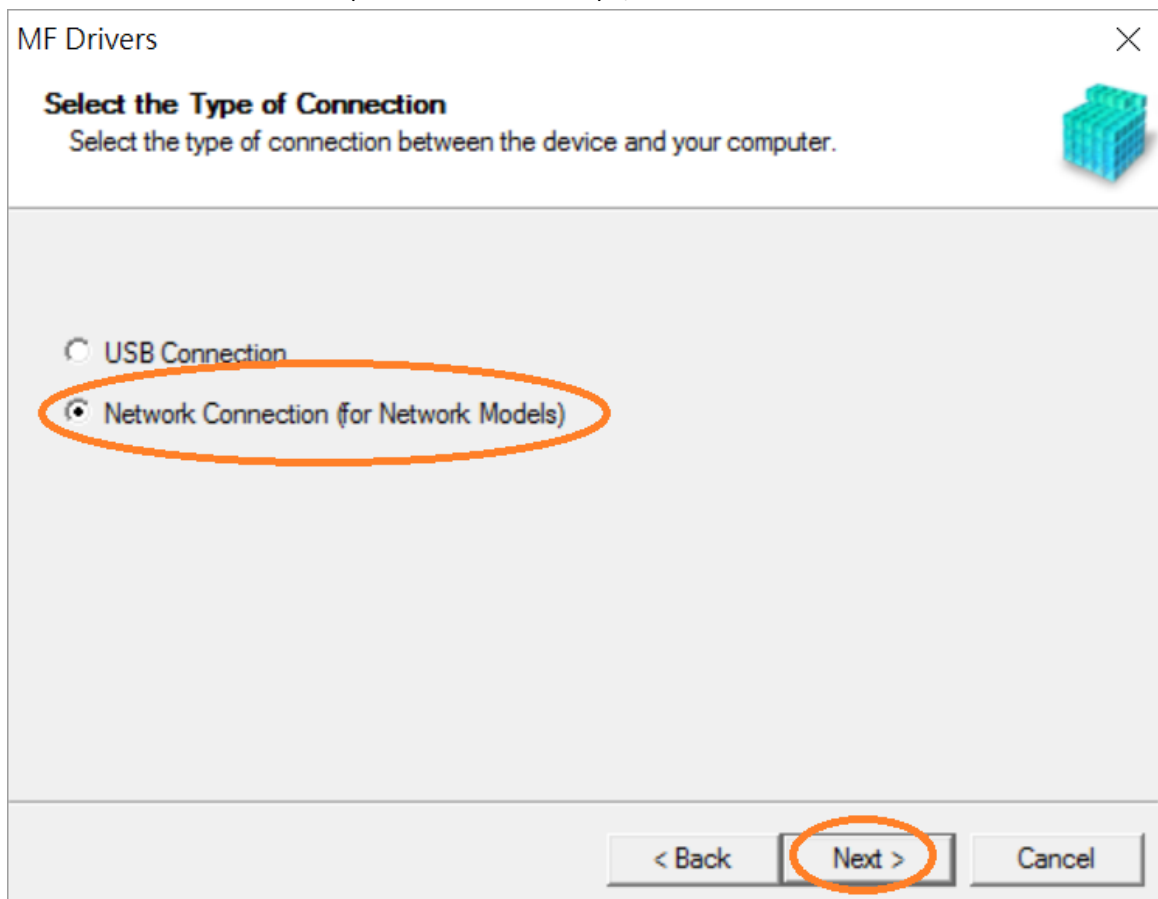

17. 按「是」
Click "Yes"

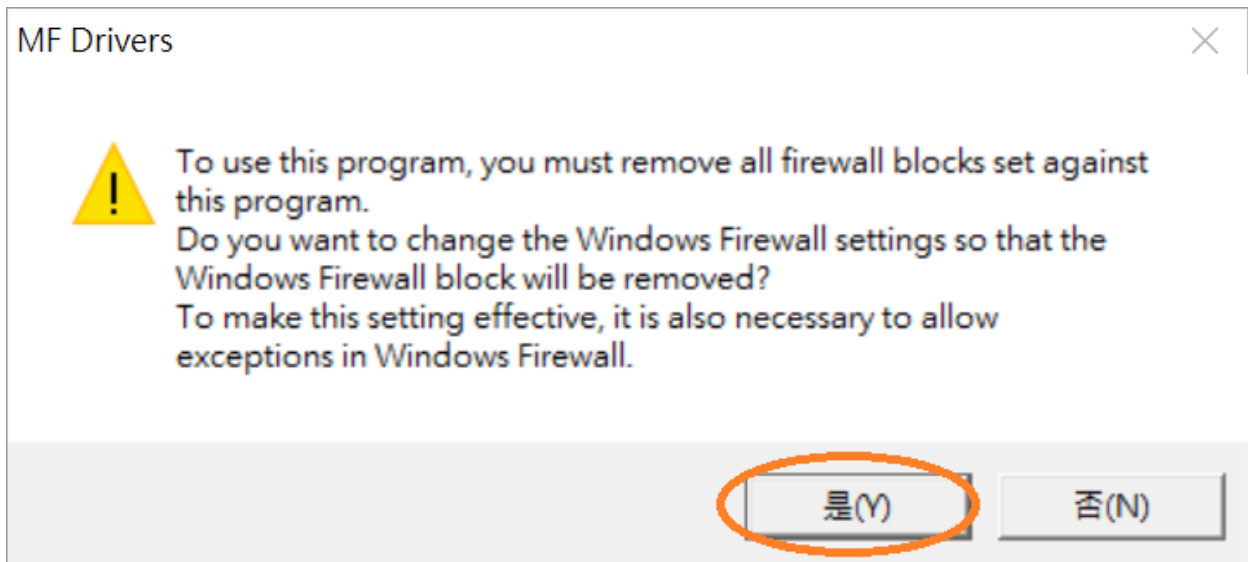

18. 選擇「MF410 Series」，按「Next >」
Select "MF410 Series", click "Next >"

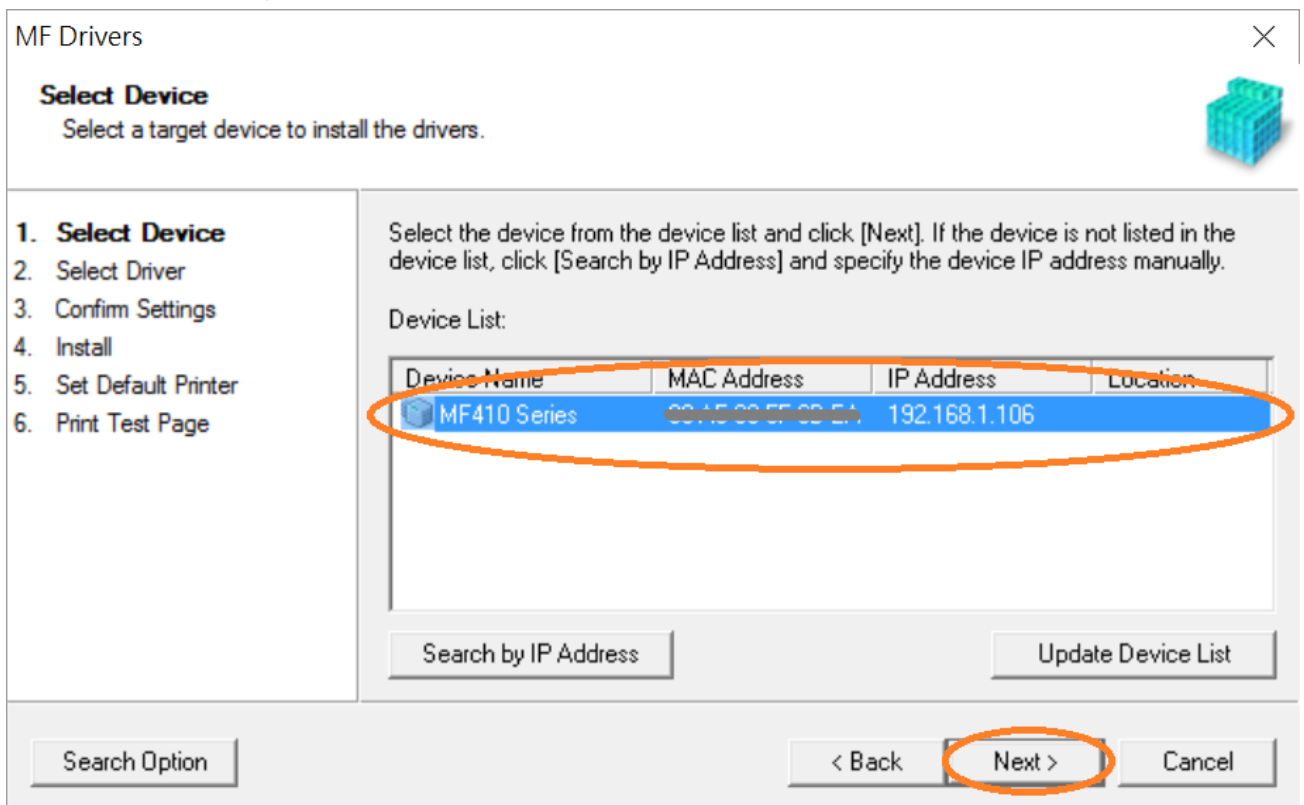

19. 確認已剔選「Printer」「Fax (for Supported Models)」「Scanner」，按「Next >」

Confirm the “Printer” “Fax (for Supported Models)” “Scanner” box is checked, click “Next >”

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Target Device
MF410 Series

Driver to Install:

Printer
 Fax (for Supported Models)
 Scanner

Canon Driver Information Assist Service
When you install this service and use shared or local printers, functions that allow you to obtain device information will be added to your computer.

< Back **Next >** Cancel

20. 選擇「UFR II Printer Driver」，按「Next >」

Select “UFR II Printer Driver”, click “Next >”

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Target Device
MF410 Series

Printer Drivers to Install:


UFR II Printer Driver
 PCL6 Printer Driver
 PS3 Printer Driver

< Back **Next >** Cancel

21. 按「Next >」
Click “Next >”

MF Drivers ×

Confirm Settings
Confirm the following setting details.



1. Select Device
2. Select Driver
- 3. Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the printer name. If you specify this printer as a shared printer, you can specify the shared printer name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Printer

Port: CNMFNP_00A3035F00DEA
Driver: Canon MF410 Series UFR II

Printer Name:

Use as Shared Printer


Shared Name:

Current Device: 1
Number of Devices to Set: 2

22. 按「Next >」
Click “Next >”

MF Drivers ×

Confirm Settings
Confirm the following setting details.



1. Select Device
2. Select Driver
- 3. Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the fax name. If you specify this fax as a shared fax, you can specify the shared fax name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Fax

Port: CNMFNP_00A3035F00DEA
Driver: Canon Generic FAX Driver (FAX)


Fax Name:

Use as Shared Fax


Shared Name:

Current Device: 2
Number of Devices to Set: 2


23. 按「Start」
Click "Start">

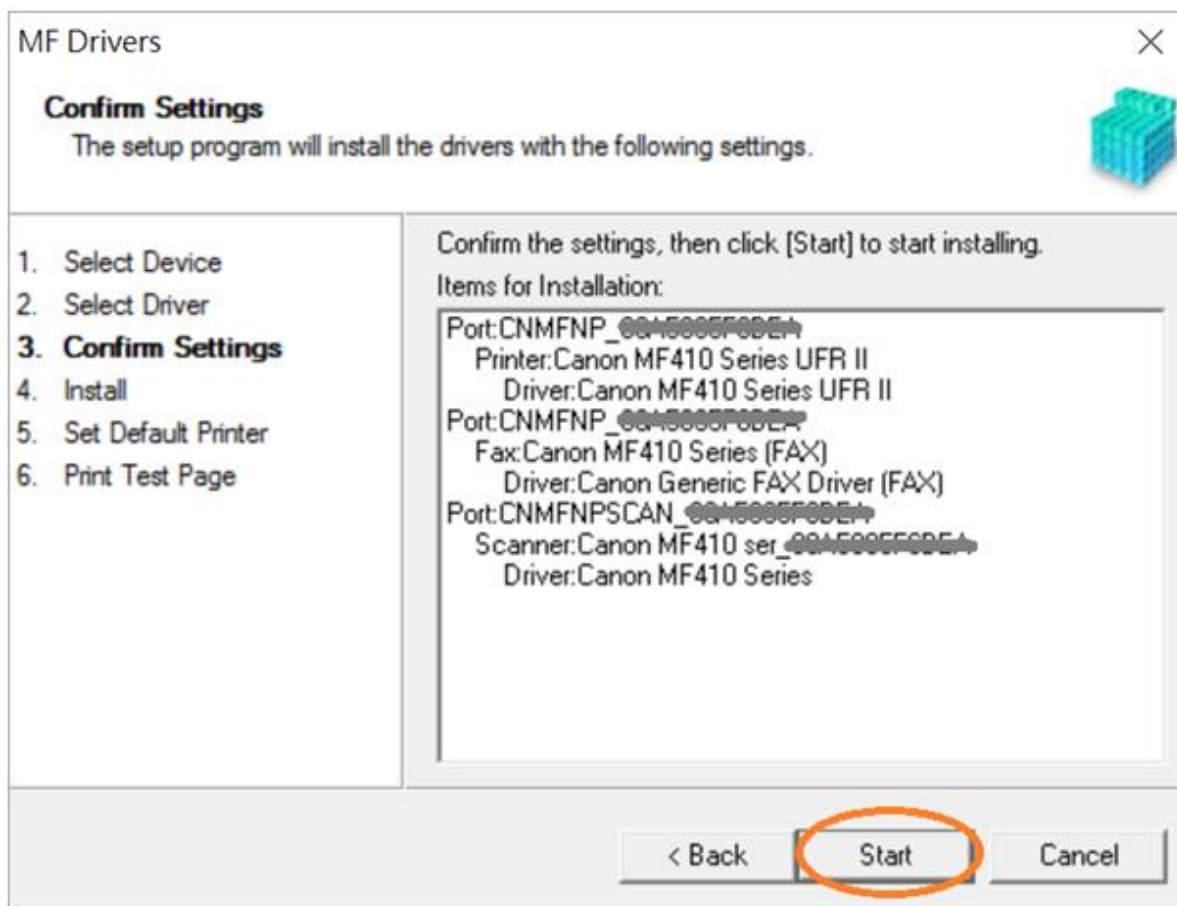


24. 請等待安裝精靈成完安裝
Please wait for the setup wizard to accomplish installation

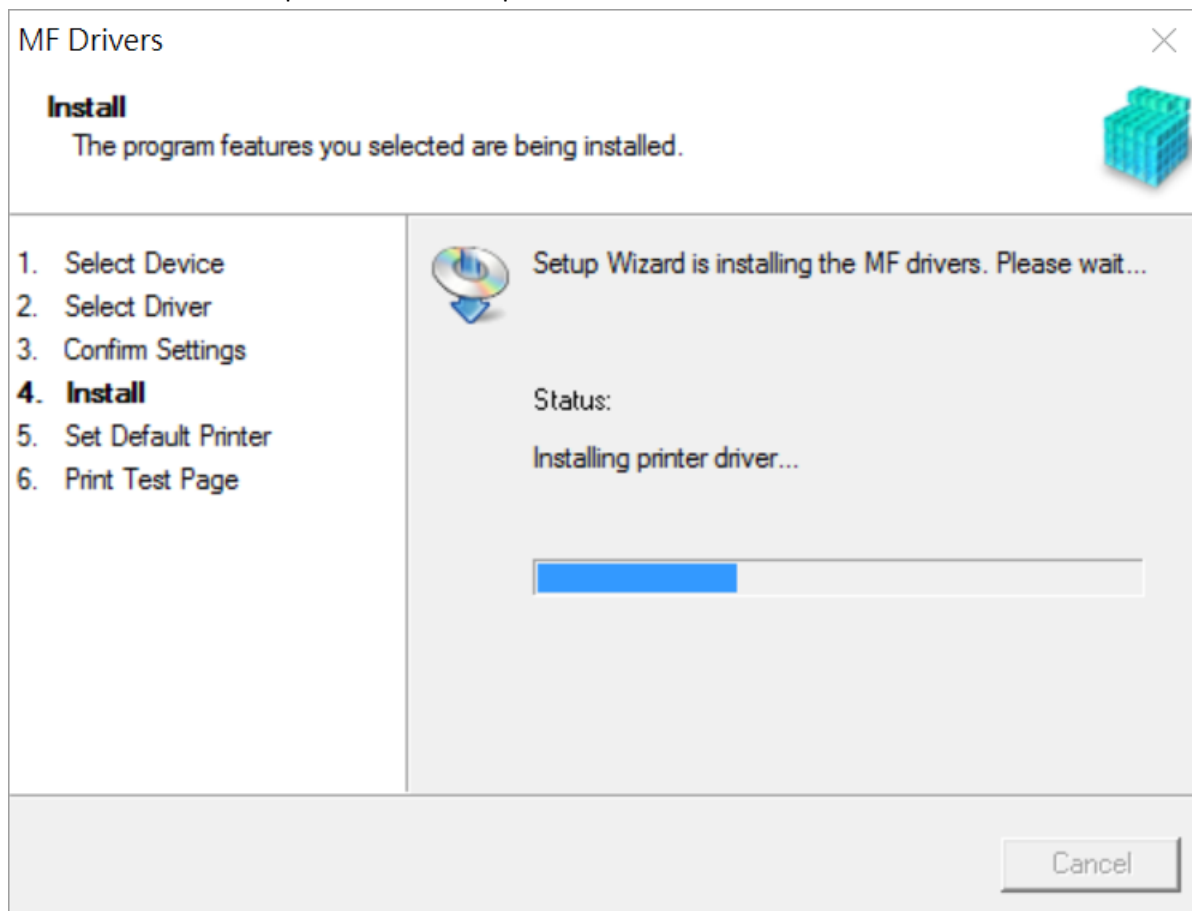


25. 選擇「Installed Printer: Canon MF410 Series UFR II」，按「Next >」
Select “Installed Printer: Canon MF410 Series UFR II”, click “Next >”

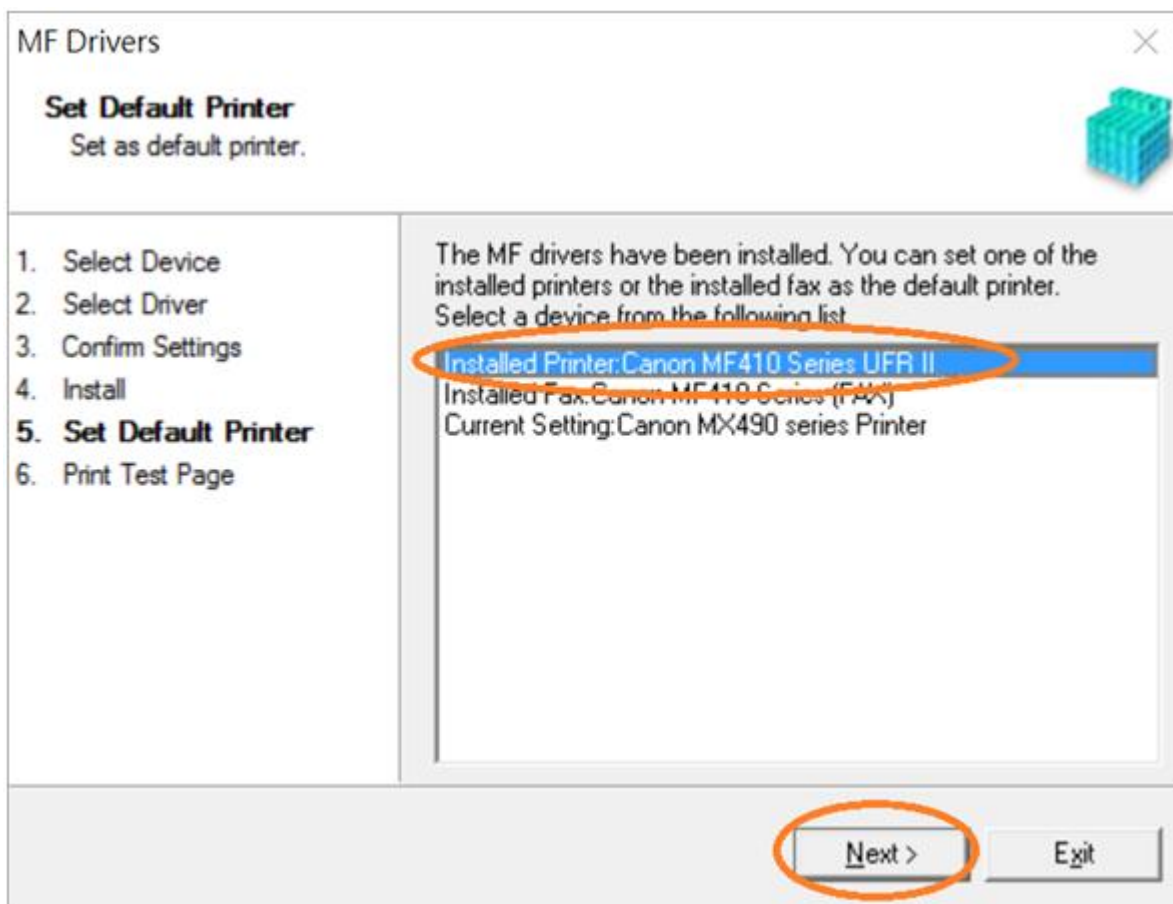


26. 可剔選「Printer: Canon MF 410 Series UFR II」進行列印測試頁，按「Exit」
Can check the box at “Printer: Canon MF 410 Series UFR II” to print a test page, click “Exit”

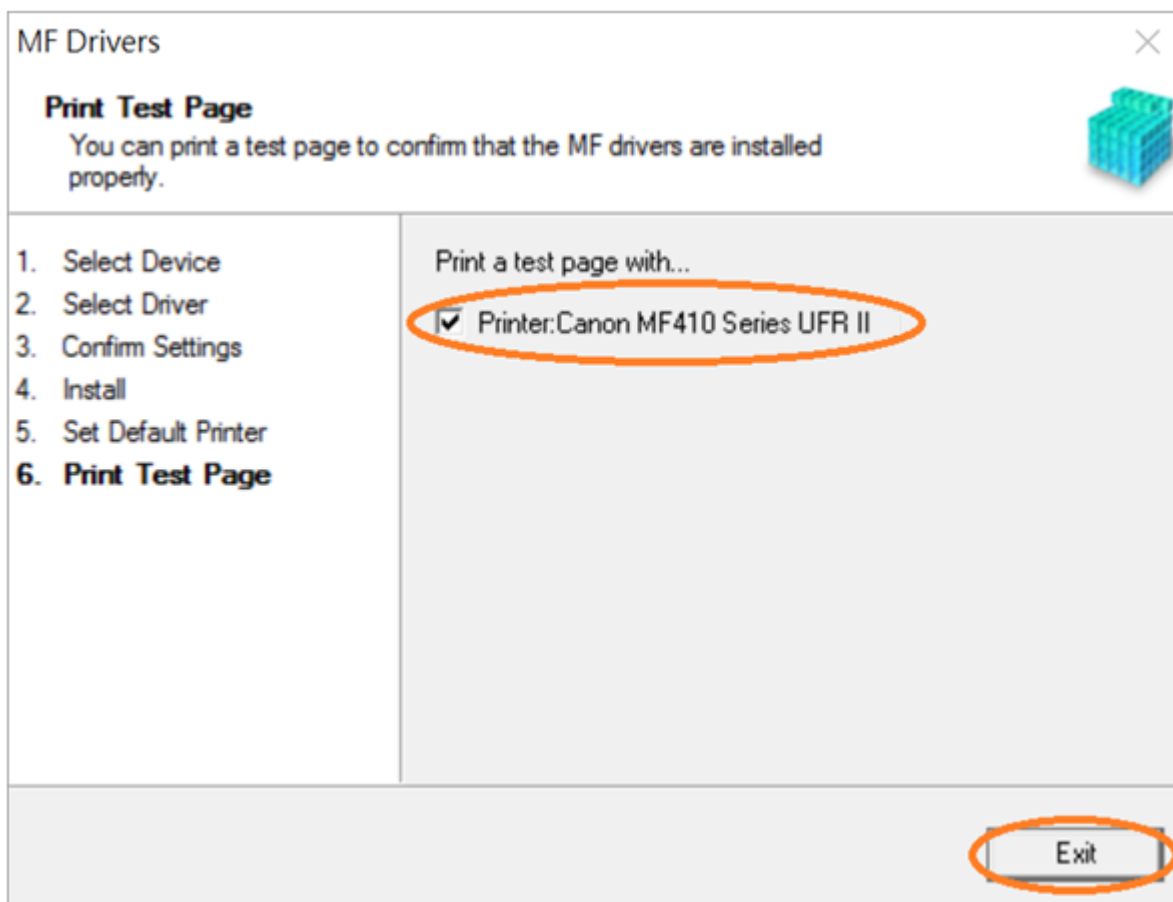


27. 到佳能網站 <http://support-hk.canon-asia.com/> ，選擇相關的印表機型號及下載掃瞄軟件 MF Scan Utility
(Go to: <http://support-hk.canon-asia.com/> , select related printer model and download the scanner software MF Scan Utility)
28. 下載完成後，打開掃瞄軟件安裝檔案
Open scanning software installation file after downloaded
29. 按「Next >」
Click “Next >”

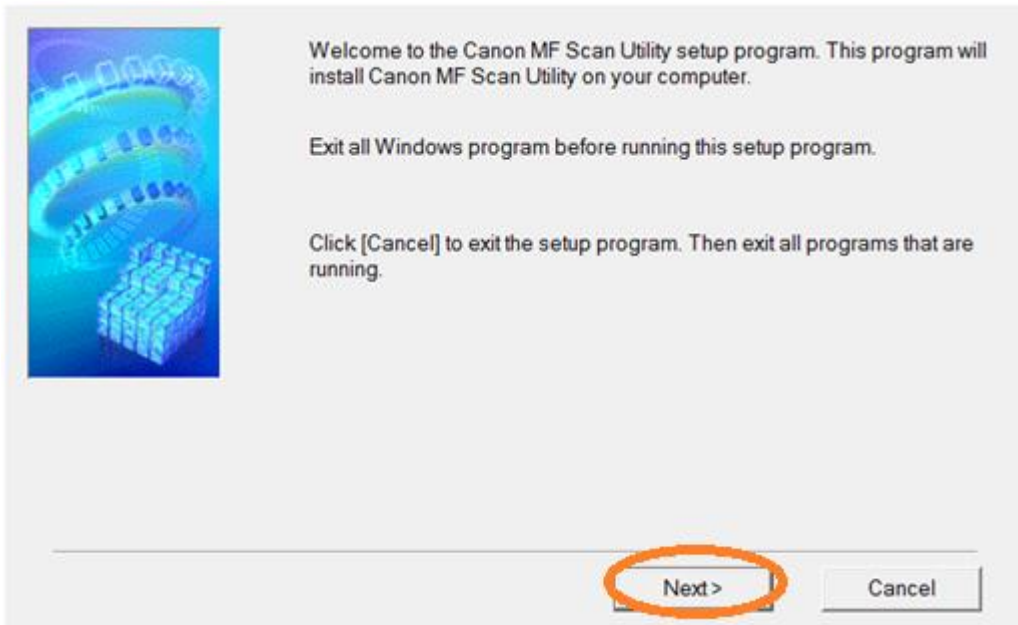

30. 按「Yes」
Click “Yes”

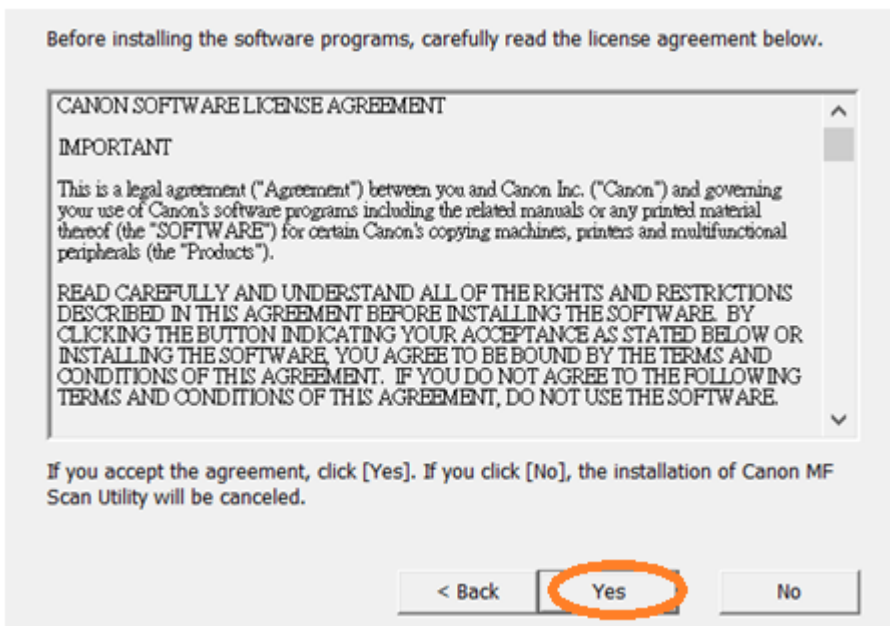

31. 按「Complete」
Click “Complete”

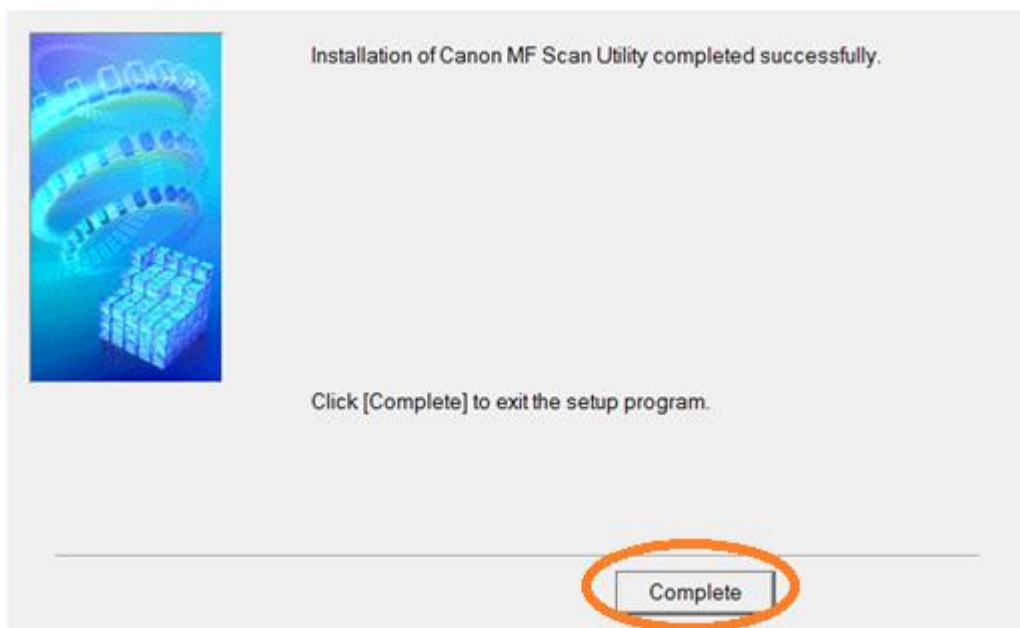

-完-
-End-