


在 MAC OSX 以 WIFI 接駁安裝 MF416dw 驅動程式步驟 (以 OSX 10.11 作示範)
MF416dw printer driver Installation Guide for MAC OSX via WIFI (OSX 10.11 as example)


1. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式
Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver




2. 選擇並下載以下檔案
Choose and download below files:
 - 打印機驅動程式 / Printer Driver
MF Printer Driver & Utilities for Macintosh V10.11.1 [Mac OS : 10.8/10.9/10.10/10.11/10.12/10.13/10.14]
 - 掃描程式 / Scanner Software
Scanner Driver & Utilities for Macintosh V2.15.0 [Mac OS : 10.9/10.10/10.11/10.12/10.13/10.14]
3. 開啟下載檔案「UFR II LT Printer Driver」，進入「SFP」文件夾
Open "UFR II LT Printer Driver", and then open "SFP"

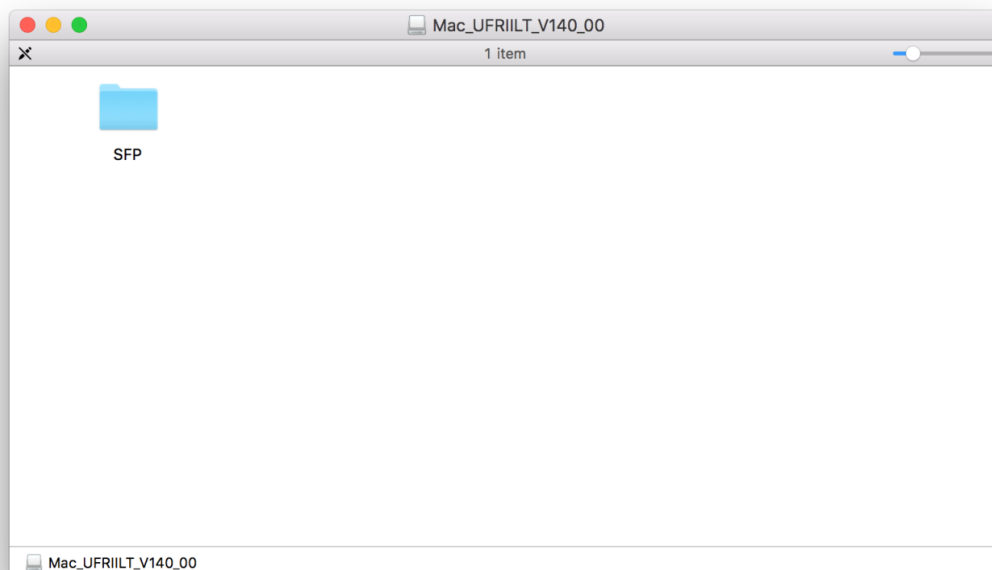


4. 開啓“UFRIL_LT_***.pkg”文件開始安裝設定
Open “UFRIL_LT_***.pkg” to start the driver installation

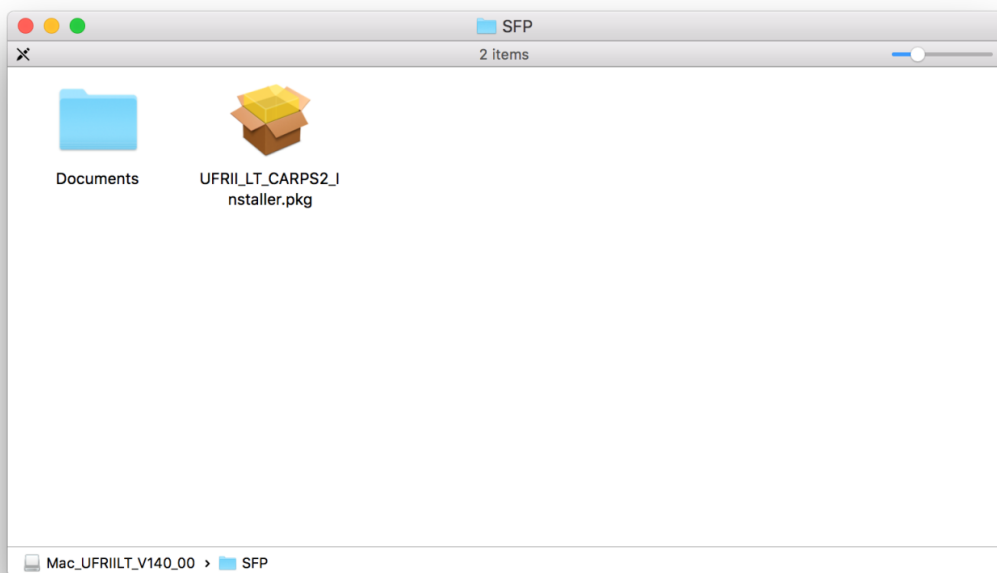


5. 按「Continue」
Click “Continue”

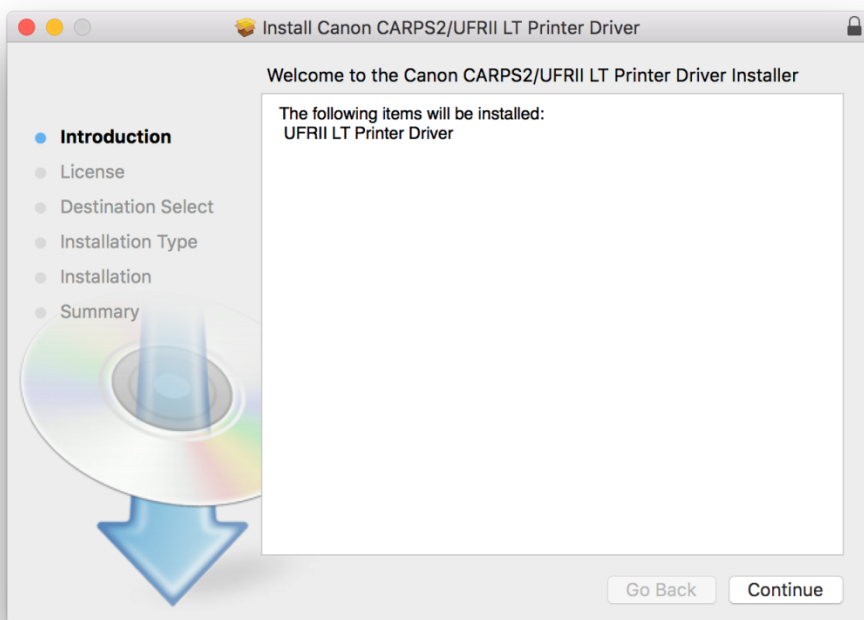


6. 按「Continue」
Click “Continue”

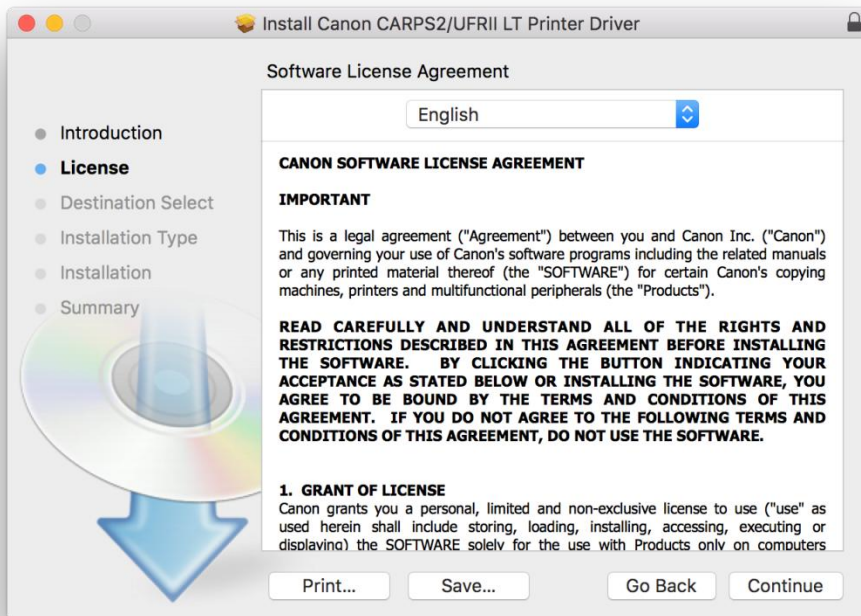


7. 按「Agree」
Click “Agree”

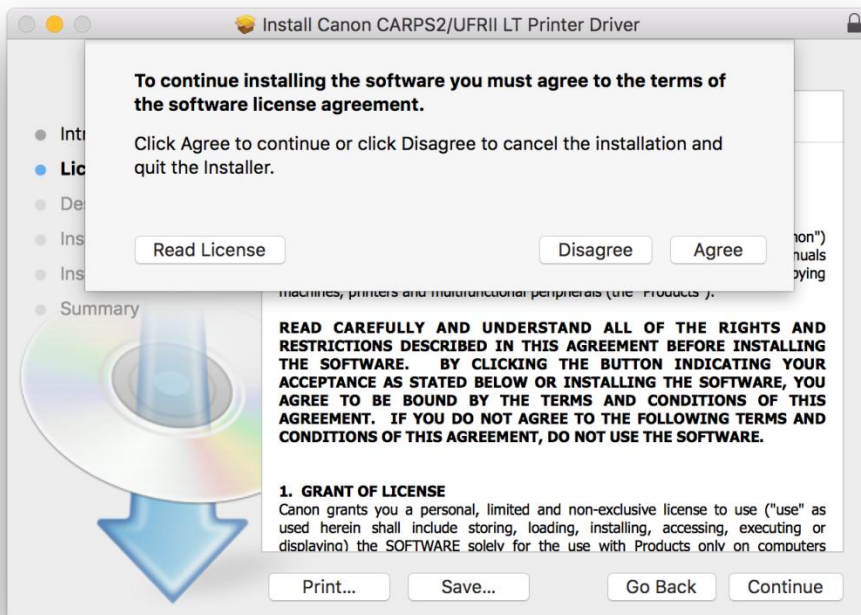


8. 按「Install」
Click “Install”

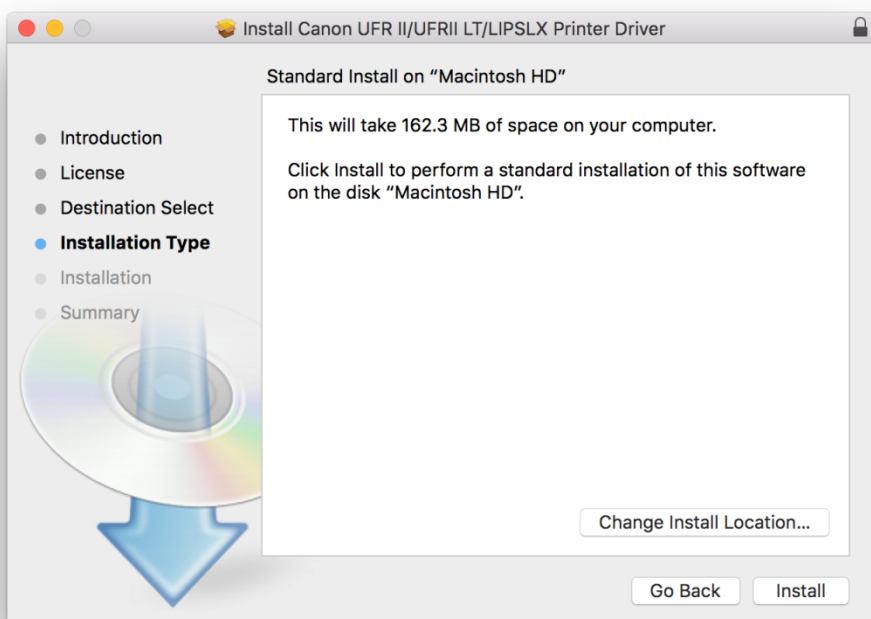

9. 請輸入登入名稱及密碼（如出現以下畫面）
Please enter the login username and password (If this screen is shown below)

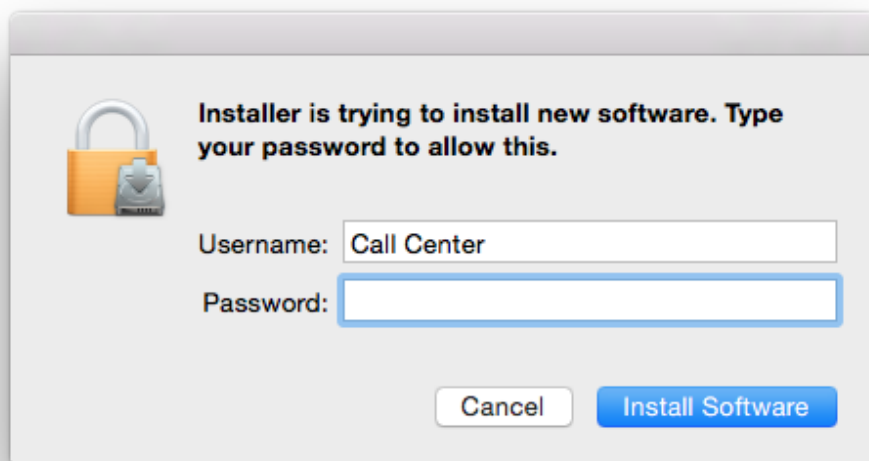

10. 按「Close」
Click “Close”

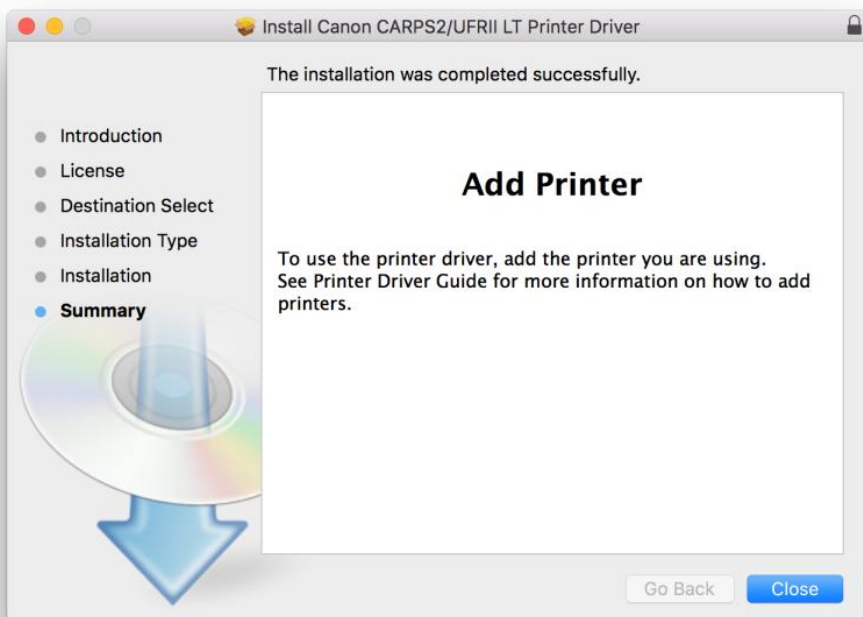

****完成安裝驅動程式後，請於印表機上設定連接到網絡**

****After finished the driver installation, please connect the printer to a wireless network**

11. 開啟印表機，在主畫面中點選「功能表」
Turn on printer, tap “Menu “in the Home screen

12. 點選「網路設定」
Tap “Network Settings“

13. 點選「選擇有線/無線區域網路」
Tap “Select Wired/Wireless LAN“

14. 點選「無線區域網路」
Tap “Wireless LAN“



15. 在主畫面中點選「功能表」

Tap “Menu” in the Home screen

16. 點選「網路設定」

Tap “Network Settings”

17. 點選「無線區域網路設定」；若顯示「是否啟用無線區域網路？」訊息，點選「是」


Tap “Wireless LAN Settings”; If the “Do you want to enable the wireless LAN?” Message is displayed, tap “Yes”

18. 讀取顯示的訊息，然後點選「完成」

Read the message that is displayed, and tap “OK”


19. 點選「SSID 設定」

Tap “SSID Settings”




20. 點選「選擇存取點」

Tap “Select Access Point”




21. 本機開始搜尋可用的無線路由器

The machine starts searching for available wireless routers




22. 選擇無線區域網路路由器

Select a wireless LAN router



23. 使用數字鍵輸入網路金鑰，然後點選「套用」

Enter the network key using the numeric keys, and tap "Apply"

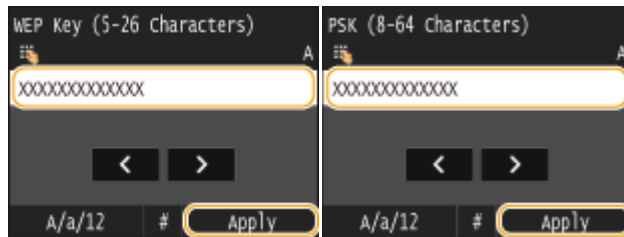


24. 點選「是」

Tap "Yes"

25. 檢查於操作面板的 Wi-Fi 顯示是否為閃燈狀態，當產品探測到無線數據路由器時，操作面板上的 Wi-Fi 將顯示為閃燈狀態

Check that the Wi-Fi indicator is blinking on the operation panel. The Wi-Fi indicator blinks when a wireless router is detected

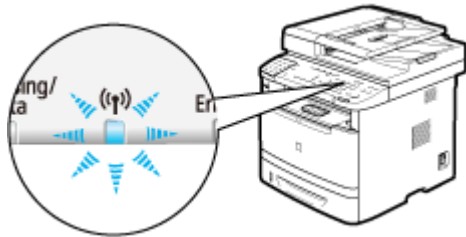


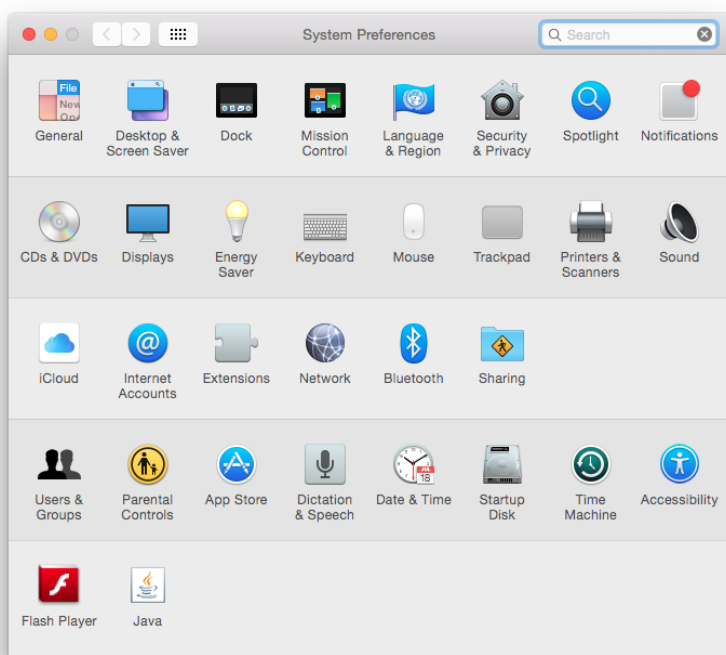
26. 以下圖示為設定完成。其後約 2 秒後，操作面板的 Wi-Fi 顯示燈將亮起，請再等待約 2 分鐘（IP 位址及其他設定將會自動完成）

When the setup is completed, the screen below is displayed, and approximately 2 seconds later, the Wi-Fi indicator lights up. Wait approximately 2 minutes (until the automatic settings of IP address and other items are complete)




27. 完成印表機上的網絡設後，按一下電腦左上角「」圖案，選擇「系統偏好設定」，再選擇「印表機和掃描器」


After finished the network setup in the printer, please click the top left corner of the computer 「」 icon, click 「System Preferences」, and then click 「Printers and Scanners」



28. 於〔列印和掃描器 (Printers & Scanners)〕視窗，按一下「+」按鈕加入印表機
In the [Printers & Scanners] window, click the "+" button to register the printer

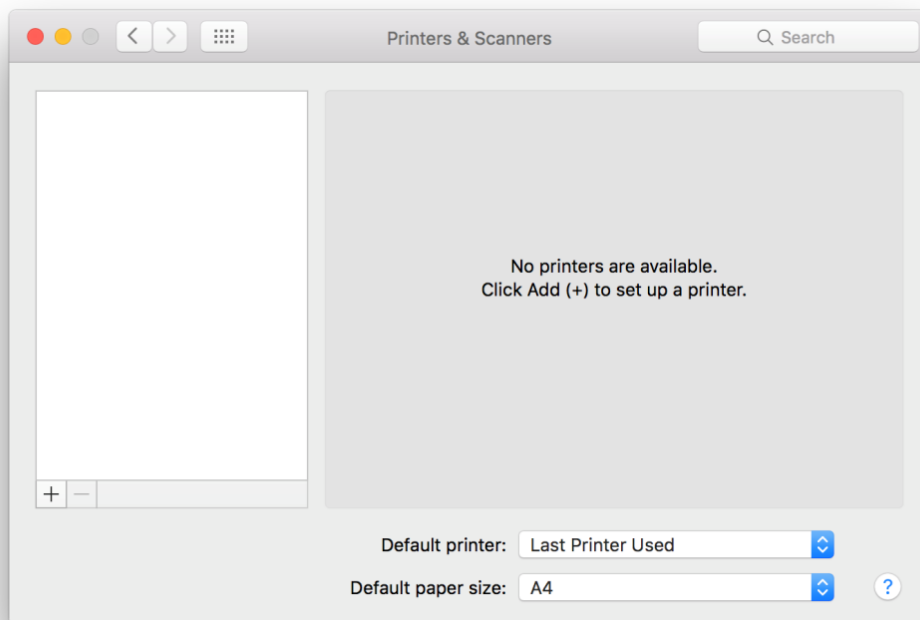

29. 名稱選擇「Canon MF410 Series」，種類「Bonjour Multifunction」，確認「使用 (Use)」為「Canon MF410 Series」，然後按「加入 (Add)」
Choose "Name" as "Canon MF410 Series", confirm "Kind" as "Bonjour Multifunction" and "Use" is "Canon MF410 Series", and then click "Add"

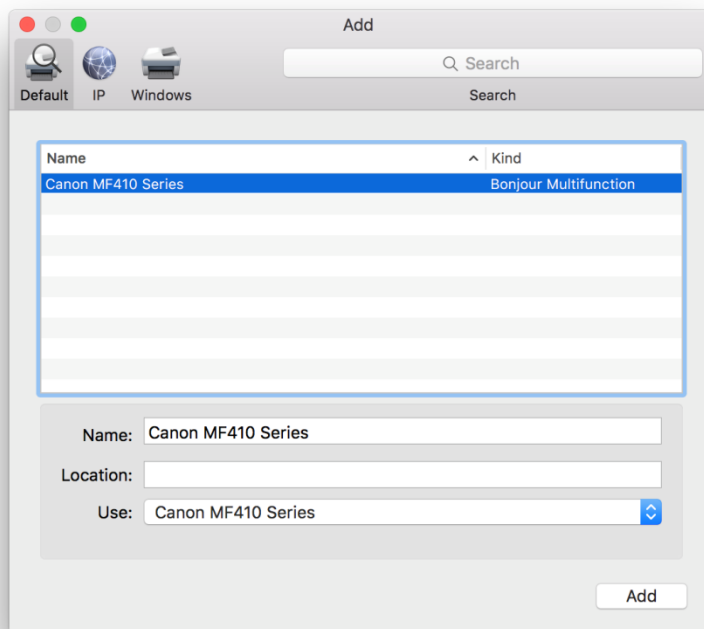


*** 如「使用（Use）」不是「Canon MF410 Series」，請按以下步驟設定***

*** If “Use” is not “Canon MF410 Series”, please refer to the steps below***


- a) 請如下圖打開「使用（Use）」的選單，選擇” Select Software”

Please open “Use”, and then choose “Select Software”

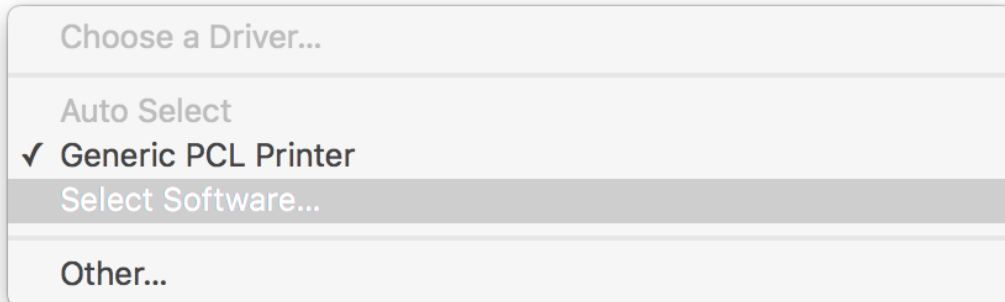


- b) 輸入 MF410 以搜尋「Canon MF410 Series」

Enter MF410 and then choose “Canon MF410 Series”

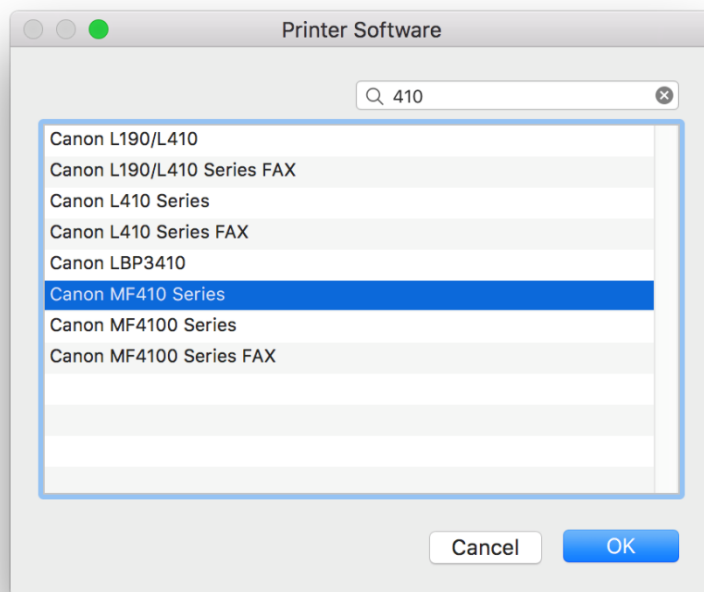

30. 新增印表機完成，驅動程式安裝完畢
After the printer is added, driver installation is completed

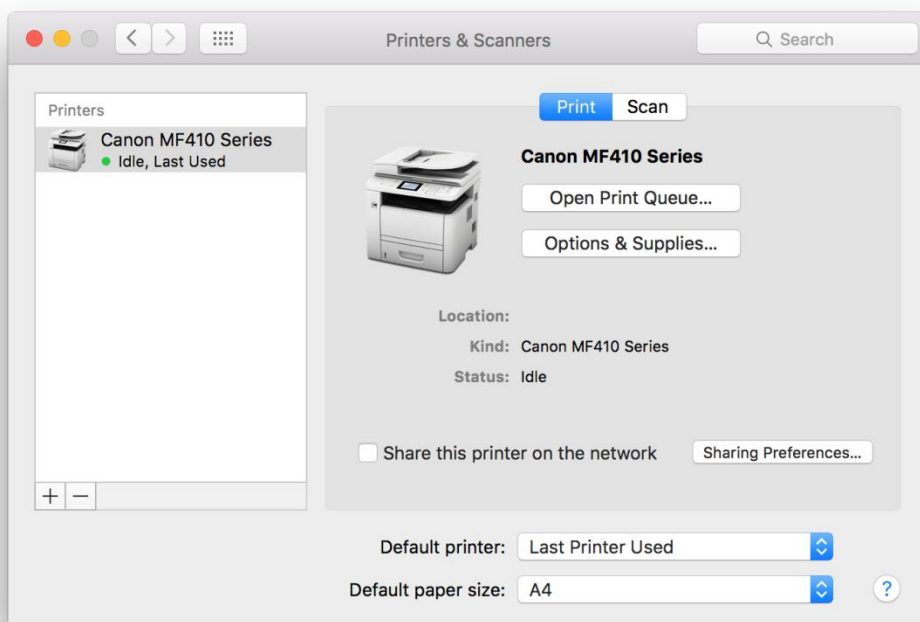

<完>
<END>