





在 Windows 以無線網路接駁安裝 PRO-500 驅動程式步驟 (以 Win 10 作示範)
PRO-500 printer driver Installation Guide for Windows (Via Wi-Fi) (Win 10 as example)

連接打印機至無線網路路由器


Connect printer to Wi-Fi router

1. 確認印表機已開啟，按主頁按鈕 。使用 ▲▼ 按鈕選擇 LAN 設定 ，按 OK 按鈕

Ensure printer was turned on, and press Home button . Use ▲▼ button to select LAN settings  and press OK button


2. 選擇無線 LAN 設定，按 OK 按鈕

Select Wireless LAN setup, and press OK button



3. 選擇標準設定，按 OK 按鈕

Select Standard setup, and press OK button



4. 選擇無線路由器名稱，按 OK 按鈕

Select wireless router' name, and press OK button




5. 將顯示以下螢幕之一

One of the screens below will appear

(如果出現“已連接到無線路由器”，請跳到[步驟 10](#))

(If "Connected to the wireless router" appears, please go to [step 10](#))

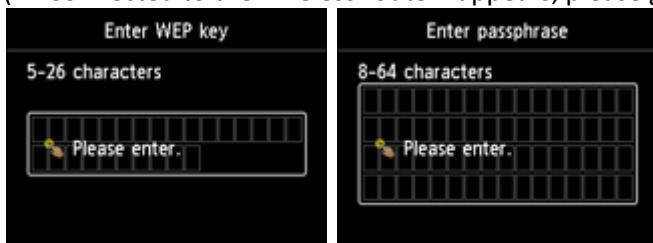


6. 按 OK 按鈕


Press OK button

7. 輸入網路密碼

Enter the network password




8. 使用  按鈕選擇 OK，然後按 OK 按鈕


Use  button select OK, and press the OK button




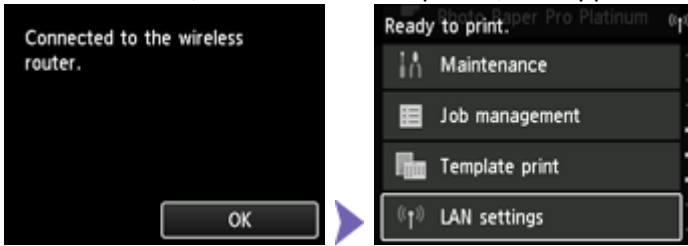
9. 按 OK 按鈕

Press OK button



10. 按 OK 按鈕，連接完成後， 會出現在螢幕右上方

Press OK button, connection is completed,  appears at the upper right of the screen



點擊以下連結下載有關之驅動程式:

<http://ugp01.c-ij.com/ij/webmanual/WebPortal/PTL/ptl-setup.html?lang=tc&type=setup&area=hk&model=pro-500&os=w>

Click below link to download printer driver:

<http://ugp01.c-ij.com/ij/webmanual/WebPortal/PTL/ptl-setup.html?lang=en&type=setup&area=hk&model=pro-500&os=w>

下載及安裝步驟

11. 按一下“下載”，下載完成後開啟該檔案安裝

Click “Download”, and open the file after download completed

12. 按“開始設定”

Click “Start Setup”



13. 選擇“亞洲”、“香港特別行政區”，按“下一步”
Select “Asia”, “Hong Kong SAR China”, and click “Next”



1 **2** **3** **4**

選擇國家或地區

選擇居住地。


亞洲

選擇您居住的國家或地區。如果您居住的國家或地區未在下表中列出，請選擇 [其他]。

中國
中國香港特別行政區
印度
印度尼西亞
日本
韓國
馬來西亞
菲律賓
新加坡
台灣
泰國
越南

上一步 下一步

14. 按“是”
Click “Yes”

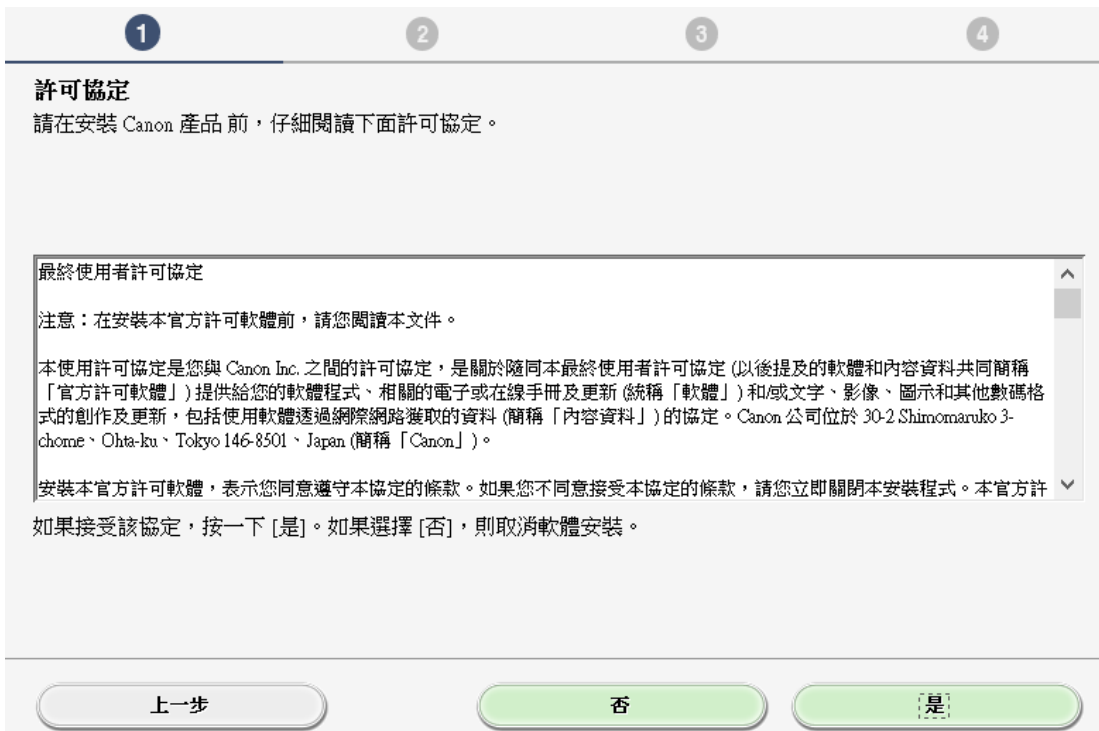

1 **2** **3** **4**

許可協定

請在安裝 Canon 產品前，仔細閱讀下面許可協定。

最終使用者許可協定

注意：在安裝本官方許可軟體前，請您閱讀本文件。

本使用許可協定是您與 Canon Inc. 之間的許可協定，是關於隨同本最終使用者許可協定 (以後提及的軟體和內容資料共同簡稱「官方許可軟體」) 提供給您的軟體程式、相關的電子或在線手冊及更新 (統稱「軟體」) 和/或文字、影像、圖示和其他數碼格式的創作及更新，包括使用軟體透過網際網路獲取的資料 (簡稱「內容資料」) 的協定。Canon 公司位於 30-2 Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501, Japan (簡稱「Canon」)。

安裝本官方許可軟體，表示您同意遵守本協定的條款。如果您不同意接受本協定的條款，請您立即關閉本安裝程式。本官方許可軟體如果接受該協定，按一下 [是]。如果選擇 [否]，則取消軟體安裝。

上一步 否 是

15. 可選擇是否同意作傳送資訊至 Canon Extended Survey Program

Select “Agree” or “Disagree” to send information to Canon Extended Survey Program

1 **2** **3** **4**

Extended Survey Program

為了使產品的開發與銷售更好地滿足用戶的需求，Canon 需要與您的 Canon 產品相關的以下資訊，然後透過網際網路傳送至 Canon (如果在中國使用 Canon 產品，傳送至法定研究機構)。

與 Canon II 印表機/掃描器/傳真機有關的資訊

- 電腦作業系統版本、語言和顯示設定資訊
- 裝置驅動程式和應用程式軟體使用記錄
- 印表機 ID 號碼、安裝日期和時間、已安裝墨水的類型、墨水使用資訊、已列印的頁數和維護資訊
- 紙張使用資訊、列印環境條件和問卷結果

(根據所用型號的不同，可能不會傳送上述某些資訊。)

如果您的 Canon 產品為共同使用，共用產品中記錄的上述資訊將會被傳送。如果您同意，請將該事實傳播給與之共用產品的使用者並預先獲得其同意。

在該調查中，我們將不傳送任何有關您電腦的資訊(上述所列除外)或您的個人資料。鑒於這個原因，我們無法從傳送給我們的

如果同意上述資訊，按一下 [同意] 以開始安裝調查程式。否則，請按一下 [不同意]。該程式可能無法在不支援的作業系統版本上運行。

上一步 不同意 同意

16. 勾選“停用封鎖”，按“下一步”

Select “Deactivate the block”, and click “Next”

1 **2** **3** **4**

防火牆設定

必須在 Windows 防火牆功能中停用對本軟體的封鎖。

停用封鎖

下一步

17. 選擇“無線 LAN 連接”，按“下一步”

Select “Wireless LAN Connection”, and click “Next”

The screenshot shows a software interface for selecting a connection method. At the top, there are four numbered steps: 1, 2, 3, and 4. Step 2 is highlighted. The main heading is "選擇連接方法" (Select Connection Method) with the instruction "選擇印表機連接方法。" (Select the printer connection method.). There are three options, each with an icon and a radio button:

- USB 連接 (USB Connection) with a USB icon.
- 有線 LAN 連接 (Wired LAN Connection) with a network diagram icon.
- 無線 LAN 連接 (Wireless LAN Connection) with a wireless signal icon.

At the bottom, there are two buttons: "返回初始介面" (Return to Initial Screen) on the left and "下一步" (Next) on the right.

18. 按“下一步”

Click “Next”

The screenshot shows a software interface for selecting a wireless LAN connection method. At the top, there are four numbered steps: 1, 2, 3, and 4. Step 2 is highlighted. The main heading is "選擇無線 LAN 連接方法。" (Select Wireless LAN Connection Method.). There are two options, each with an icon and a radio button:

- 透過無線路由器連接(推薦) (Connect via wireless router (Recommended)) with an icon of a laptop, a router, and a printer. Below the radio button is the text "透過無線路由器連接電腦和印表機。" (Connect the computer and printer via a wireless router.).
- 直接連接 (Direct connection) with an icon of a laptop and a printer. Below the radio button is the text "直接連接電腦和印表機。" (Directly connect the computer and printer.).

Below the options, there is a note: "要在透過無線路由器連接和直接連接之間轉換，或獲取關於連接方法的更多詳細資訊，請按一下 [使用說明]。" (To switch between connecting via a wireless router and direct connection, or to get more detailed information about the connection method, click [User Manual]).

At the bottom right, there is a button labeled "使用說明" (User Manual). At the bottom, there are two buttons: "上一步" (Previous Step) on the left and "下一步" (Next) on the right.

19. 確認印表機已開啟，按“下一步”
Ensure printer was turned on. Click “Next”

1 2 3 4

確認電源
確保印表機已開啟。

上一步 下一步

20. 勾選清單中的裝置（如：****S0002），按“下一步”
Select the device (e.g. ****S0002) in the list, and click “Next”

選擇印表機

從清單中選擇
可以在保固卡和印表機上找到序號。

| IPv4 裝置 | | IPv6 裝置 | |
|---|---------------|---------|--|
| 序號(最後 5 位數) | IP 位址 | MAC 位址 | |
| <input checked="" type="checkbox"/> ****S0002 | 192.168.1.105 | 601 | |
| | | | |
| | | | |

序號位置 更新

指定 IP 位址並執行搜尋

根據指南設定網路連接
如果清單中未顯示印表機，或如果無法透過指定 IP 位址找到印表機，請選擇該選項。

返回初始介面 下一步

21. 請等待安裝精靈完成印表機驅動程式安裝

Please wait for setup wizard to accomplish the printer driver installation



22. 驅動程式安裝完成，建議勾選“設定為預設印表機”，按“下一步”

Driver installation completed. We recommend you to select “Set as default printer”, and click “Next”



23. 勾選所需軟件，按“下一步”

Select needed software, and click “Next”

1 2 3 4

軟體安裝清單

將安裝所選軟體。請確保已選擇了想要安裝的軟體，然後按一下 [下一步]。

| | | |
|-------------------------------------|-----------------------|-------|
| <input checked="" type="checkbox"/> | 使用者手冊 | 10 MB |
| <input checked="" type="checkbox"/> | My Printer | 14 MB |
| <input checked="" type="checkbox"/> | Quick Utility Toolbox | 25 MB |
| <input checked="" type="checkbox"/> | Print Studio Pro | 40 MB |
| <input type="checkbox"/> | XPS 驅動程式 | 30 MB |

磁碟機 C: 149048 兆位元組
剩餘空間

總共需要空間: 222 兆位元組

估計安裝時間: 5 至 10 分鐘
根據網路環境，安裝可能需要一段時間。

預設值

清除全部

返回初始介面

下一步

24. 按“是”

Click “Yes”

1 2 3 4

許可協定

請在安裝 Adobe RGB (1998) 前，仔細閱讀下面許可協定。

ADOBE SYSTEMS INCORPORATED

COLOR PROFILE LICENSE AGREEMENT

NOTICE TO USER: PLEASE READ THIS CONTRACT CAREFULLY. BY USING ALL OR ANY PORTION OF THE SOFTWARE YOU ACCEPT ALL THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE WITH THE TERMS OF THIS AGREEMENT, DO NOT USE THE SOFTWARE.

1. DEFINITIONS In this Agreement, "Adobe" means Adobe Systems Incorporated, a Delaware corporation, located at 345 Park Avenue, San Jose, California 95110. "Software" means the software and related items with which this Agreement is provided.

如果接受該協定，按一下 [是]。如果選擇 [否]，則軟體將無法安裝。

上一步

否

是

25. 請等待安裝精靈完成印表機驅動程式安裝

Please wait for setup wizard to accomplish the printer driver installation



26. 按“結束”

Click “Finish”

