


LBP7110Cw 以無線 LAN 連線連接印表機之驅動程式步驟 (以 Win 10 作示範)
The Driver installation procedure for LBP7110Cw (Via Wi-Fi)(Win 10 as example)


****注意: 安裝驅動程式前請勿接駁 USB 線，以免系統發生錯誤****

**** Please don't plug the USB cable until the driver asked to do so****


1. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式 - UFTRII LT Printer Driver
(Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver - UFTRII LT Printer Driver)
2. 下載的文件以自解壓縮檔檔案(.exe 格式)保存在指定的文件夾中，打開文件解壓縮。將在同一文件夾中創建新文件夾。新文件夾的名稱與解壓縮文件的名稱相同 (Open “LBP7100Cn_LBP7110Cw***.exe”, a new folder will be created.)
-如打開文件解壓縮時出現「使用者帳戶控制」選項，請按「是」 (If “User Account Control” window pop-up. Choose “Yes”)

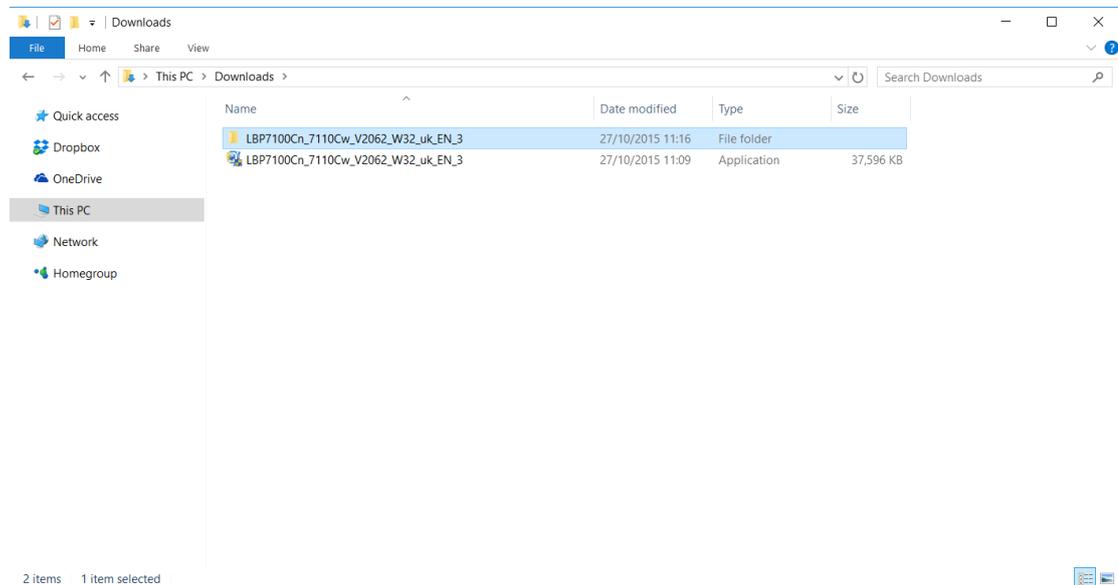

3. 進入「Network_Setting_Tool」文件夾，開啓“CNAN1STK.exe”文件開始安裝設定
(Go into “Network_Setting_Tool”, then Double Click / Open “CNAN1STK.exe”)

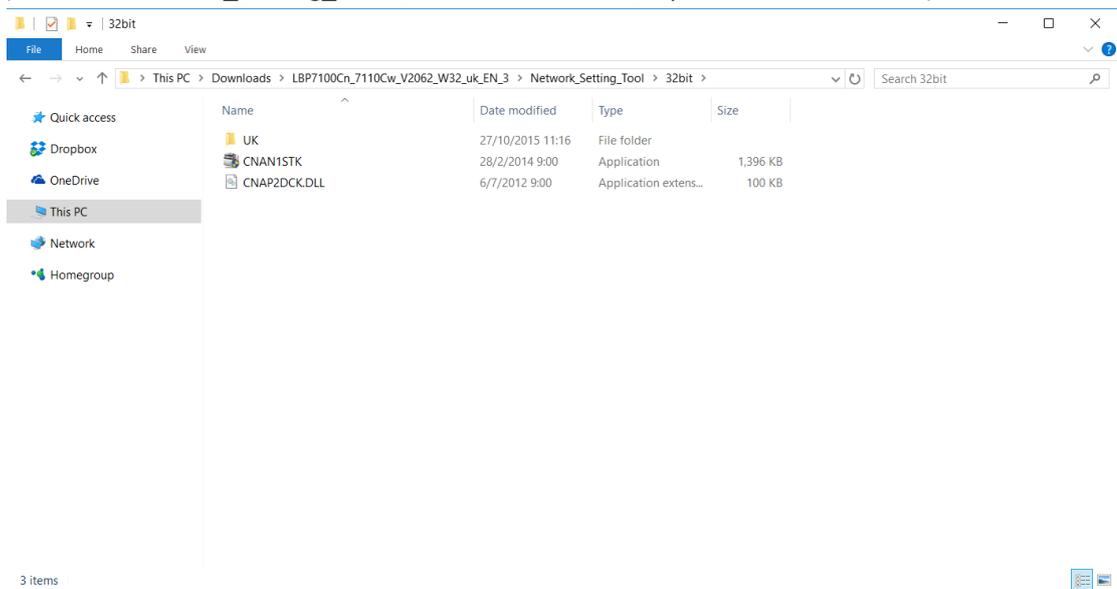

4. 選擇「Wireless LAN Connection」(Choose “Wireless LAN Connection”)

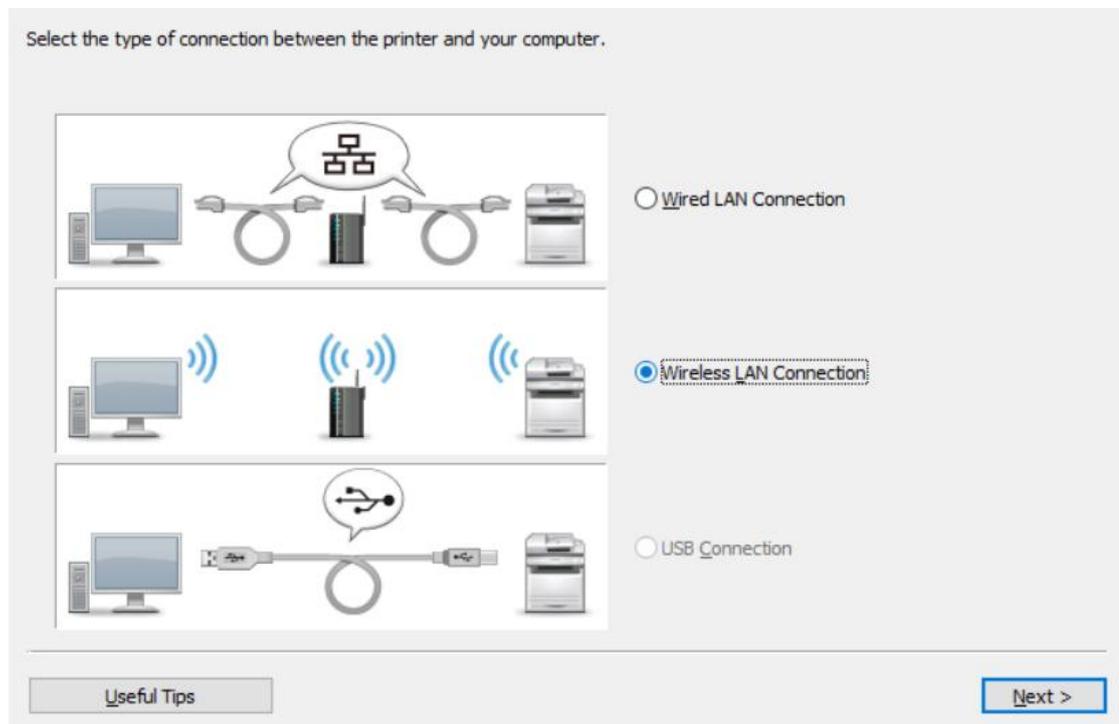

5. 選擇「Yes, I want to configure network settings」 (Choose “Yes, I want to configure network settings”)

1. Finish configuring the network settings for your computer. Refer to Useful Tips for more information.



2. Are you sure you want to configure network settings for the printer?



Yes, I want to configure network settings.

No, I do not want to configure network settings.

If Canon MF/LBP Network Setup Tool is started with the [Easy Installation] option of the CD-ROM setup, select [No, I do not want to configure network settings.] to begin driver installation on the subsequent screens.

[Useful Tips](#) [< Back](#) [Next >](#)

6. 選擇「Easy Setup」 (Choose “Easy Setup”)

Select a method to configure the wireless LAN connection settings, and then click [Next].


Easy Setup
Selecting this is recommended.

Custom Setup
Connect the printer and wireless LAN access point by entering the SSID or WPS PIN code manually. In addition to using DHCP, you can set the IP address manually, or by using BOOTP or RARP.


* Select this if you need to configure the IP address settings again.

[Useful Tips](#) [< Back](#) [Next >](#)

7. 選擇「My wireless LAN access point does not have a WPS button or I cannot find the button」(Choose “My wireless LAN access point does not have a WPS button or I cannot find the button”)

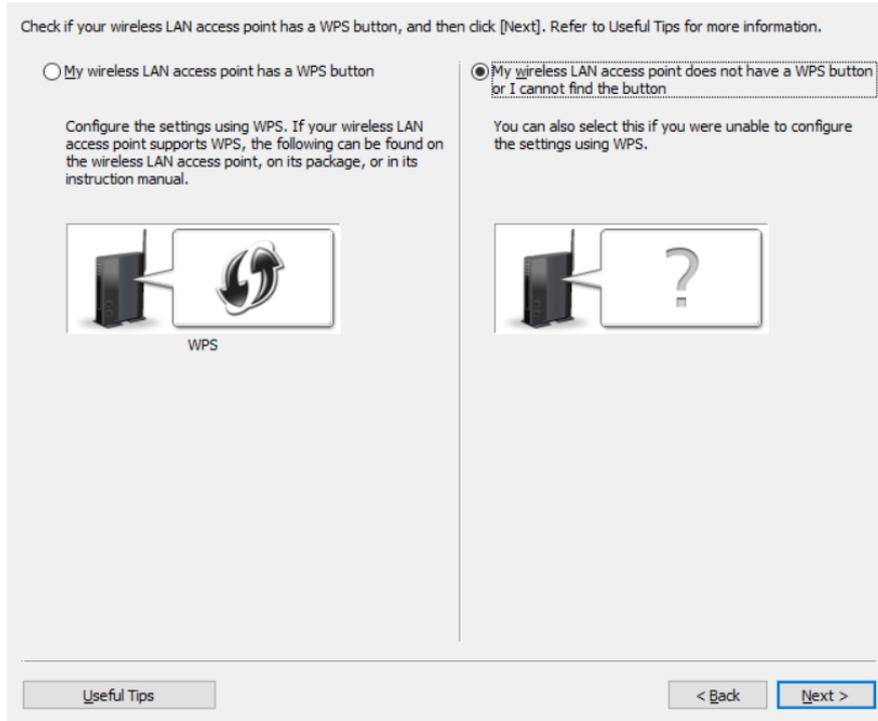

8. 請使用 USB 電纜線連接印表機和電腦，開啟印表機然後按「Next」(Connect printer and computer with the USB cable, and then turn on the printer, click “Next”)

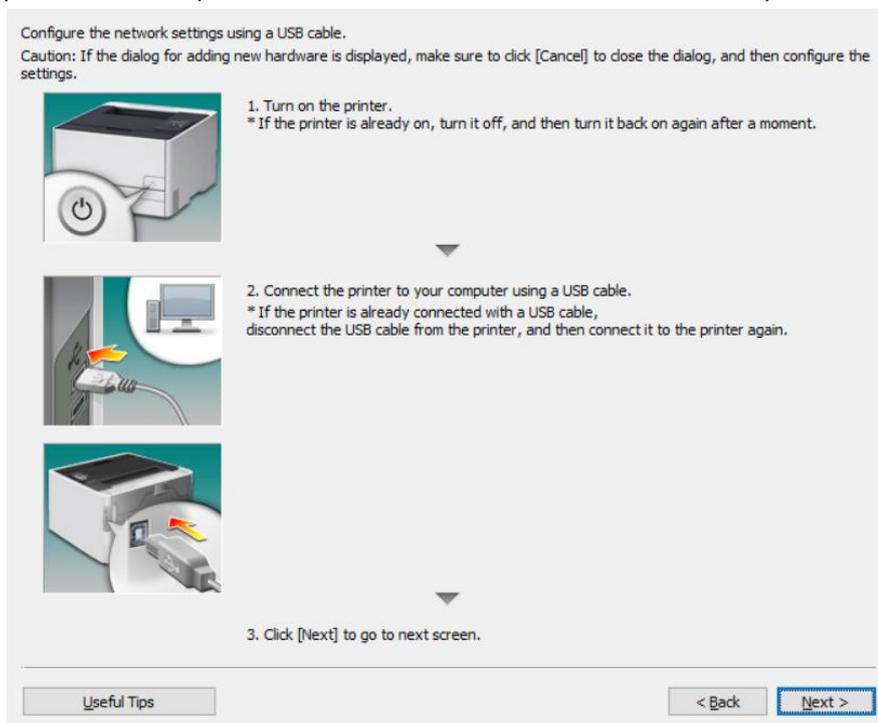

9. 選擇連接點，按「下一步」 (Choose access points, click “Next”)

The following wireless LAN access points have been detected.
Select your wireless LAN access point from the list, and then click [Next].
Refer to Useful Tips for information on how to confirm the SSID of your wireless LAN access point.

Detected Wireless LAN Access Points:

SSID	Security
CHK-CC_New	WPA2-PSK
MT_General	WPA2-PSK
MT_Guest	WPA2-PSK

The SSID may be printed on the wireless LAN access point.

[Configure Settings Again](#)

[Useful Tips](#) [< Back](#) [Next >](#)

10. 輸入 Wi-Fi 網路金鑰 (Type your Network Key)

Enter the network key for the wireless LAN access point, and then click [Next].
Refer to Useful Tips for information on how to confirm the network key.


Network Key:

Mask Network Key during Entry


The network key may be printed on the wireless LAN access point.

[Useful Tips](#) [< Back](#) [Next >](#)


11. 按指示拔除 USB 電纜線，按「下一步」 (Disconnect the USB cable, and then click “Next”)

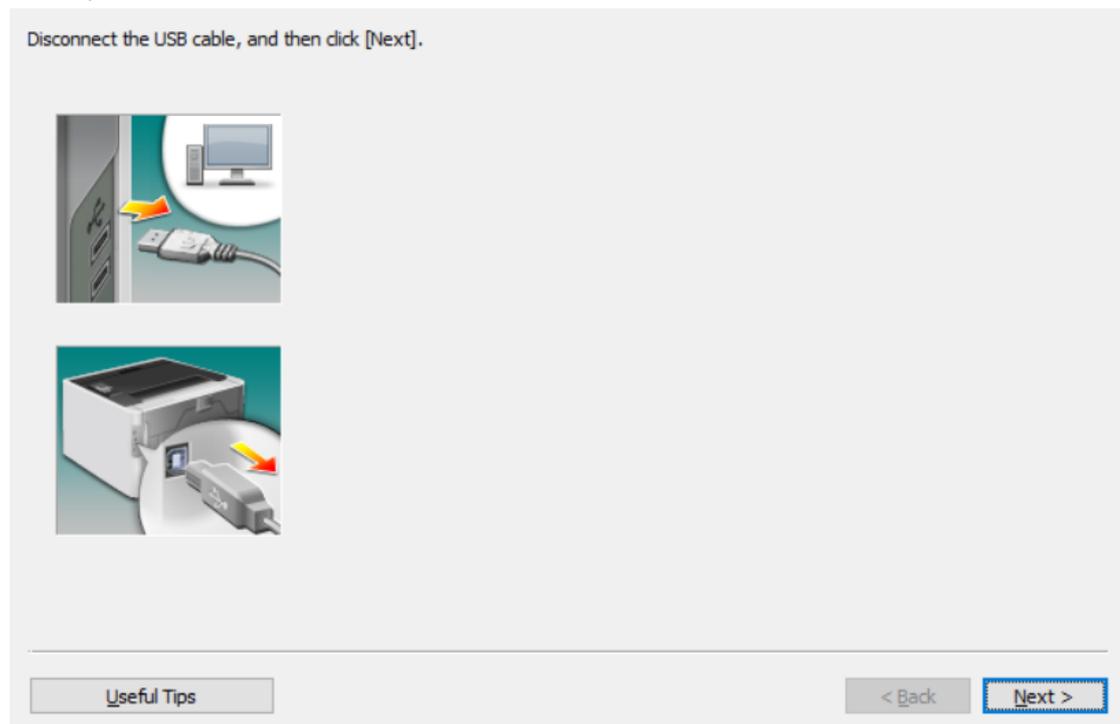


12. 按「Exit」離開網路設定工具 (Click “Exit” to exit the wizard)

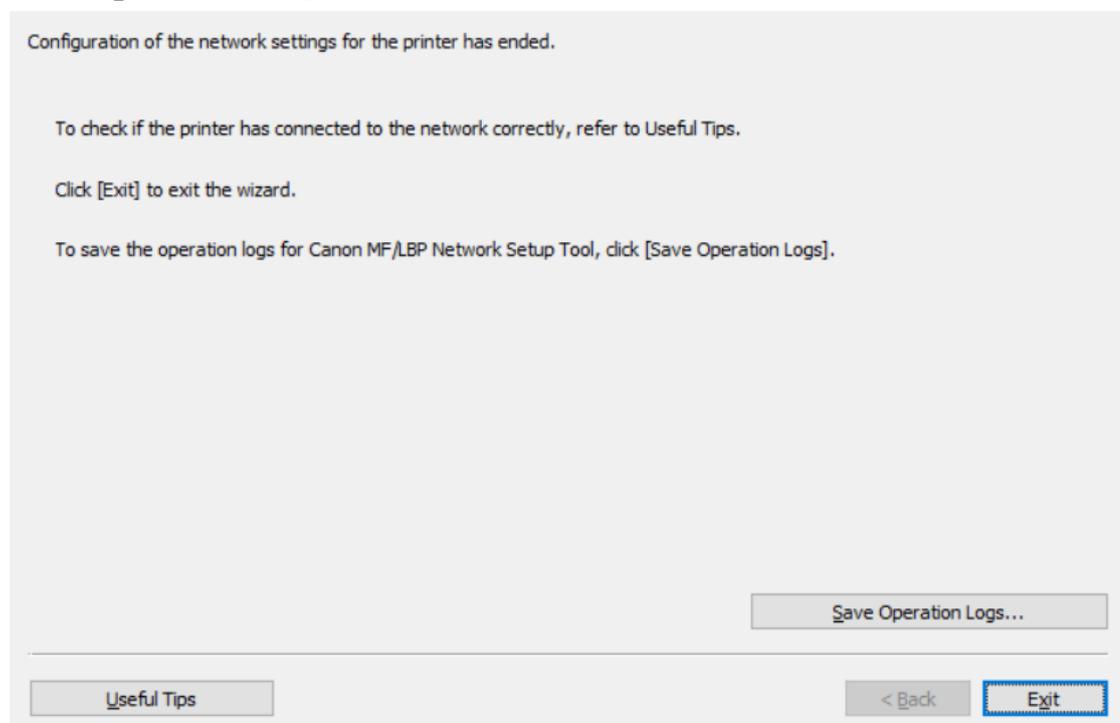


13. 再次回到早前解壓縮的文件夾 (Go back to the download folder)

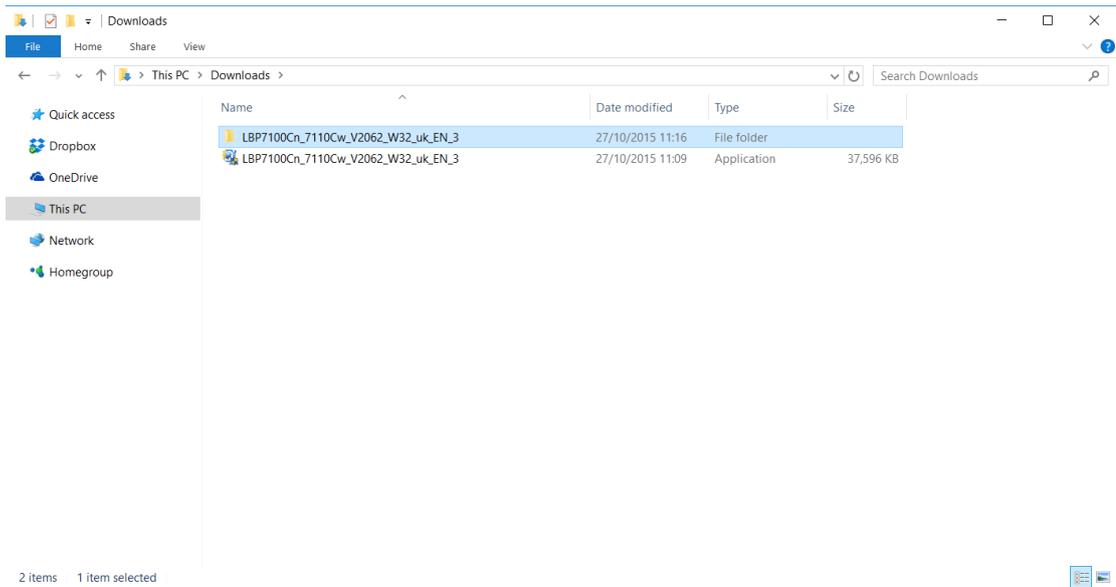


14. 進入文件夾，「Driver」文件夾，然後開啓“Setup.exe”文件開始安裝設定 (Go into “Driver”, then Double Click / Open “Setup.exe”)

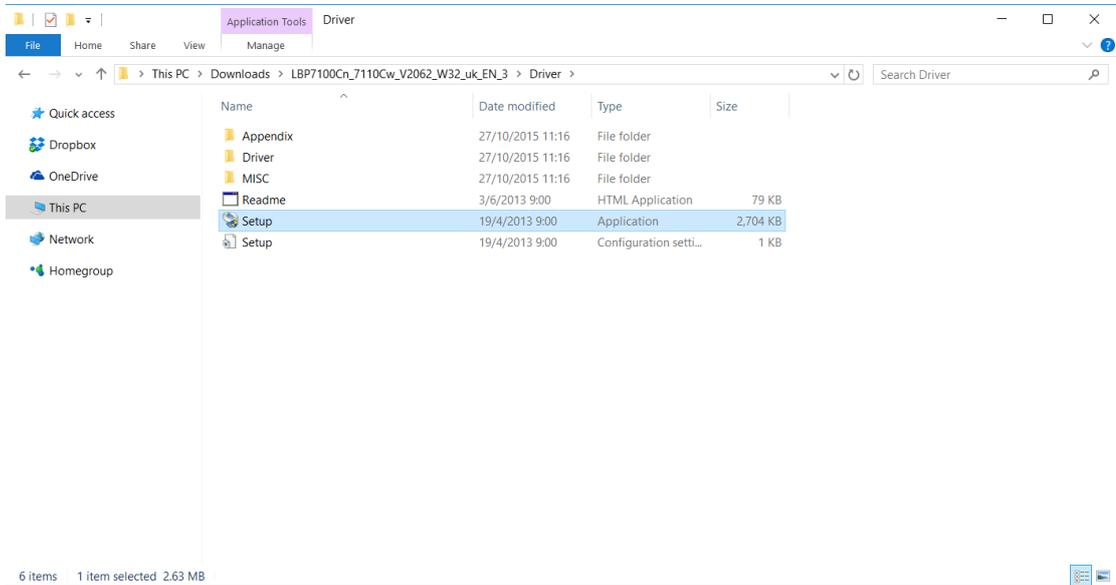

15. 按「Yes」 (Click “Yes”)

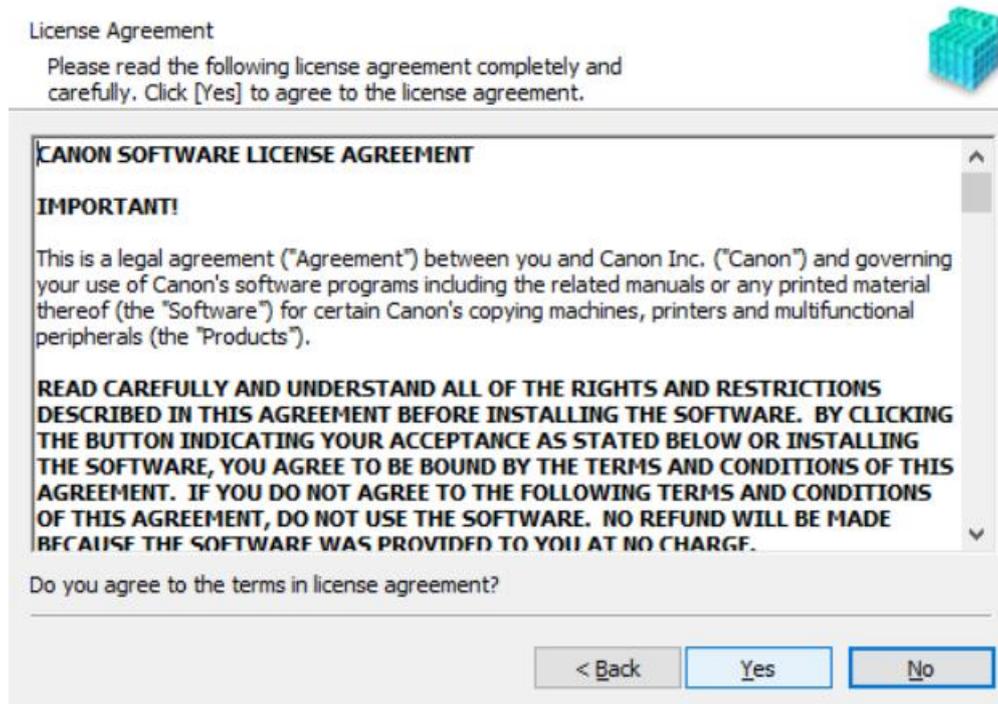

16. 選「Search for Network Printers to Install」，按「Next」 (Select “Search for Network Printers to Install”, then click “Next”)

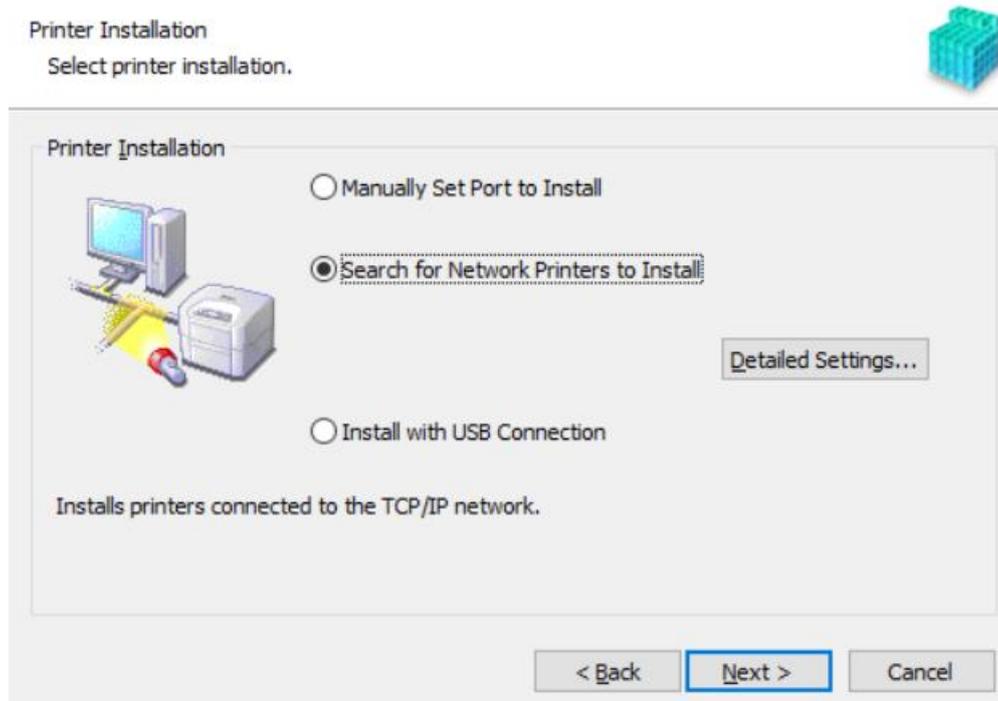

17. 從 IPv4 Devices 點選印表機，按「Add」新增印表機如下圖，按「Next」(Select Printer at IPv4 Devices Printer List, Press “Add” add printer, then click “Next”)

Select Printers to Install 
Select the printers to add, and then click [Add].

IPv4 Devices Manual Search by IP Address...

Printer List:

Device Name	Product Name	IP Address	MAC Address
LBP7110Cw	LBP7110Cw	192.168.1.117	DC

< Select All Search Again >

Add ↓ ↑ Remove

Printer List for Driver Installation:

Device Name	Product Name	IP Address	MAC Address
-------------	--------------	------------	-------------

Set Printer Information

< Back Next > Cancel

Select Printers to Install 
Select the printers to add, and then click [Add].

IPv4 Devices Manual Search by IP Address...

Printer List:

Device Name	Product Name	IP Address	MAC Address
-------------	--------------	------------	-------------

< Select All Search Again >

Add ↓ ↑ Remove

Printer List for Driver Installation:

Device Name	Product Name	IP Address	MAC Address
LBP7110Cw	LBP7110Cw	192.168.1.117	DC

Set Printer Information

< Back **Next >** Cancel

18. 按「Start」 (Click “Start”)

The setup program will install the drivers with the following settings.
Confirm the settings.



Printer List for Driver Installation:

= Add =
Printer: LBP7110Cw
Driver : Canon LBP7100C/7110C
Port : CNMFNP_DC

Click [Start] to install.

< Back Start Cancel


19. 正在安裝，請等待 (Waiting for the installation progress)

Installing...
The program features you selected are being installed.




Setup Wizard is installing the LBP7100C/7110C printer driver. Please wait...

Status:
Registering printer...



20. 建議別選「Restart My Computer Now」，按「Restart」重新開機 (We recommend choose “Restart My Computer Now”, and then restart computer)

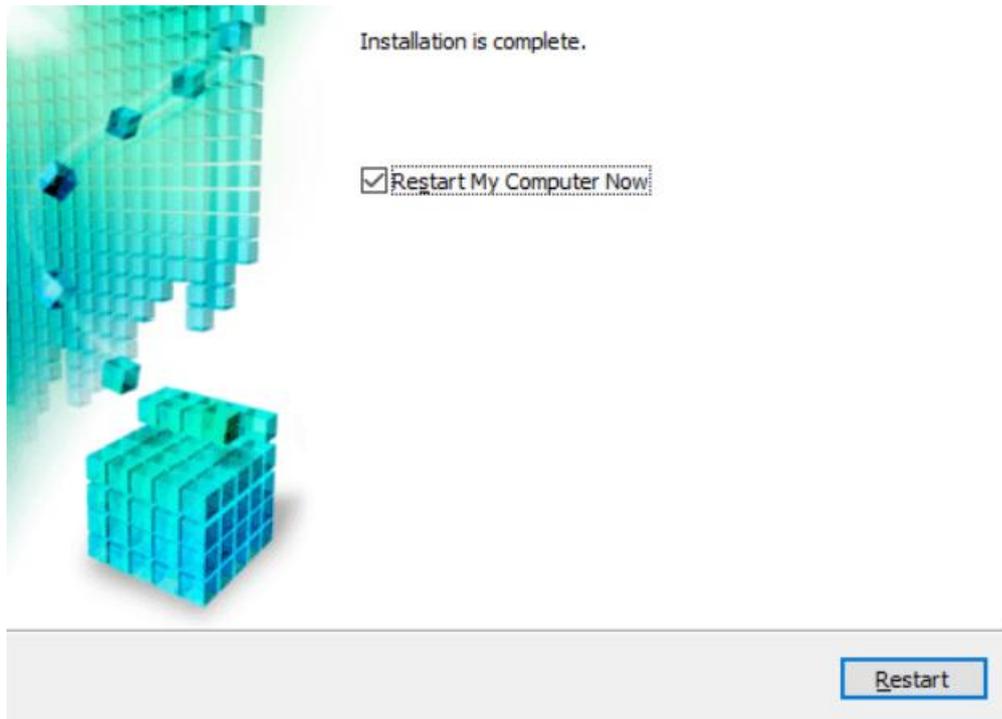

-完-
-End-