

MG3070 / MG3077 - 無線設定 (IJ Network Device Setup Utility)

MG3070/ MG3077 - WiFi Setup (IJ Network Device Setup Utility)

點擊以下連結下載 IJ Network Device Setup Utility :

https://hk.canon/en/support/PIXMA%20MG3070_%20MG3070S_%20MG3077/model

Please click below link to download IJ Network Device Setup Utility:

https://hk.canon/en/support/PIXMA%20MG3070_%20MG3070S_%20MG3077/model

下載及安裝步驟

Download and installation steps

1. 按一下“立即下載”，下載完成後開啟該檔案安裝
Click “Download Now”, and open the file after download completed
2. 按 “下一步”
Click “Next”



3. 按“是”
Click “Yes”



4. 按“下一步”
Click “Next”



5. 按“下一步”

Click “Next”



6. 按“完成”

Click “Complete”



7. 以 USB 電纜線接駁電腦，開啟印表機電源

Connect the printer with USB cable, then power on the printer

8. 開啟 “IJ Network Device Setup Utility” ，選擇 “USB” ，再按更新鍵

Open “IJ Network Device Setup Utility”, choose “USB”, and then press update button



9. 選擇印表機

Select the printer



10. 按“印表機設定”，然後按“網路設定”

Click “Printer Settings”, and then click “Network Settings”



11. 輸入印表機密碼，預設為機身編號

Enter the printer password, default is the printer's serial number

請輸入印表機密碼。

密碼:

12. 確認無線網絡名稱，或按“搜尋”選擇其他無線網絡，然後按“設定”

Confirm the wireless network name, or click “Search” to choose other wireless network, then click “Set”

網路類型:

基礎結構
 直接

SSID:

加密方法:

IPv4

使用 IPv4 位址

自動取得 IP 位址
 使用下列的 IP 位址

IP 位址:

子網路遮罩:

預設閘道:

無線路由器名稱 (SSID)	通道	通訊狀態	訊號強度	加密
CHK-CC_NEW	11	可用	75	WPA/WPA2
██████████	1	未連接	33	WPA/WPA2
██████████	1	未連接	33	WPA/WPA2
██████████	1	未連接	67	WPA/WPA2
██████████	1	未連接	68	WPA/WPA2
██████████	1	未連接	33	WPA/WPA2
██████████	1	未連接	38	WPA/WPA2
██████████	1	未連接	22	WPA/WPA2
██████████	4	未連接	16	WPA/WPA2
██████████	6	未連接	20	WPA/WPA2
██████████	6	未連接	24	WPA/WPA2

13. 輸入無線密碼，然後按“設定”


Enter wifi passphrase, then click “Set”

WPA/WPA2 詳細資料

密碼:

14. 按“確定”

Click “OK”

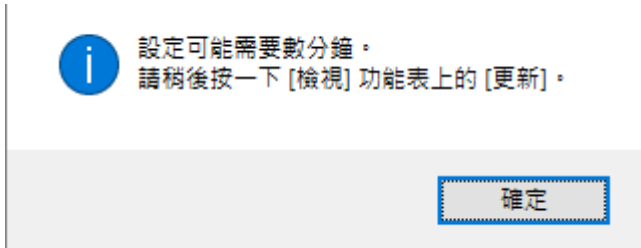

15. 設定完成，如要檢視結果，請按“更新”

Setup complete, please click “Update” button to show the status



16. 如更新後可以顯示 IP 位址，即代表無線設定成功。完成後可拔除 USB 電纜線。

If able to show the IP Address, that's mean wireless setup is successful. Remove the USB cable after complete.



安裝驅動程式

Driver installation

點擊以下連結下載驅動程式 - MG3000 series MP Drivers Ver.x.xx

https://hk.canon/en/support/PIXMA%20MG3070_%20MG3070S_%20MG3077/model


Please click below link to download driver - MG3000 series MP Drivers Ver.x.xx

https://hk.canon/en/support/PIXMA%20MG3070_%20MG3070S_%20MG3077/model

下載及安裝步驟

Download and installation steps


1. 按一下“立即下載”，下載完成後開啟該檔案安裝
Click “Download Now”, and open the file after download completed
2. 按 “下一步”
Click “Next”

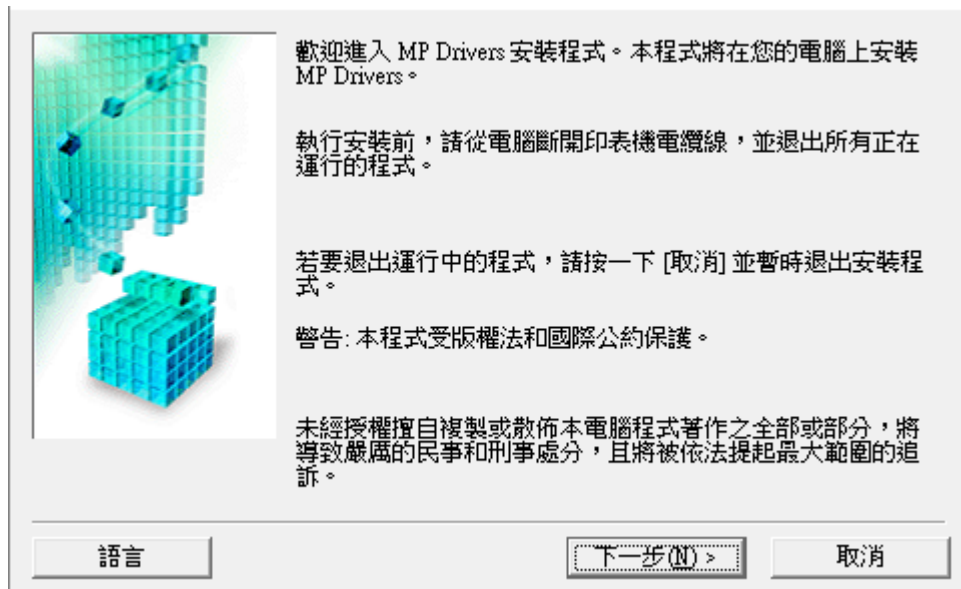

a


3. 選擇“亞洲”，再按“下一步”

Select “Asia”, then click “Next”

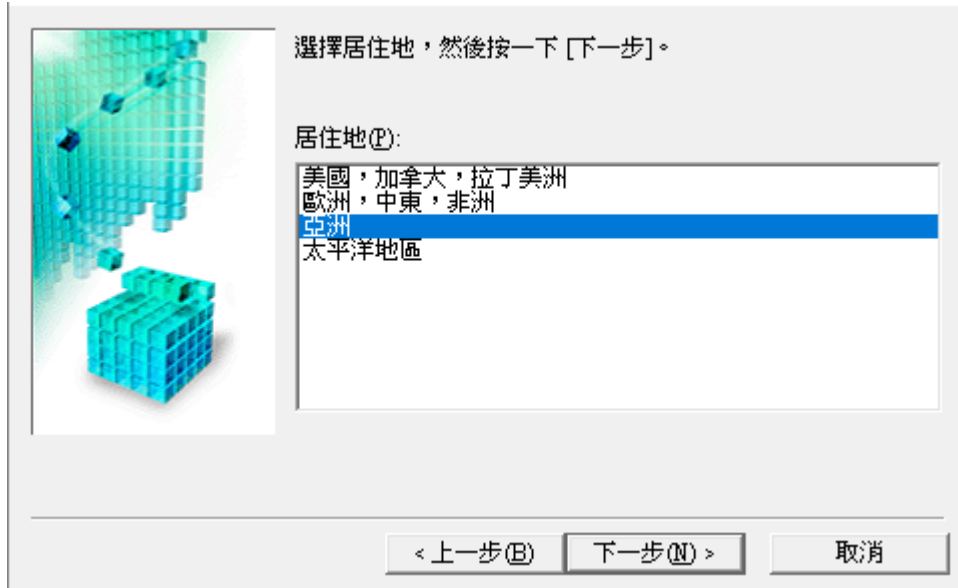

4. 按“是”

Click “Yes”

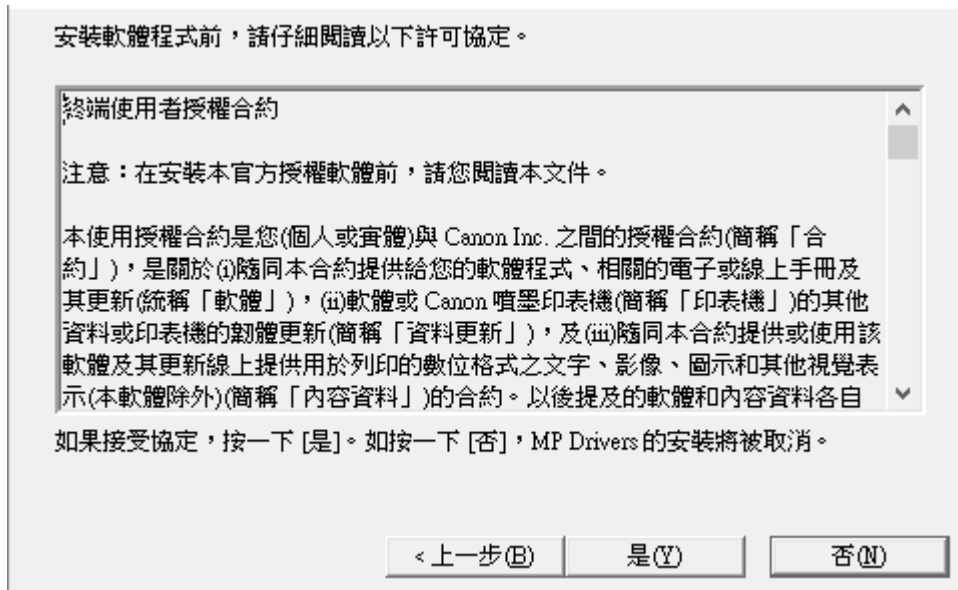

5. 選擇“透過無線 LAN 連接使用印表機”，按“下一步”

Choose “Use the printer with wireless LAN connection”, then click “Next”




6. 按“下一步”

Click “Next”



7. 按“下一步”

Click “Next”

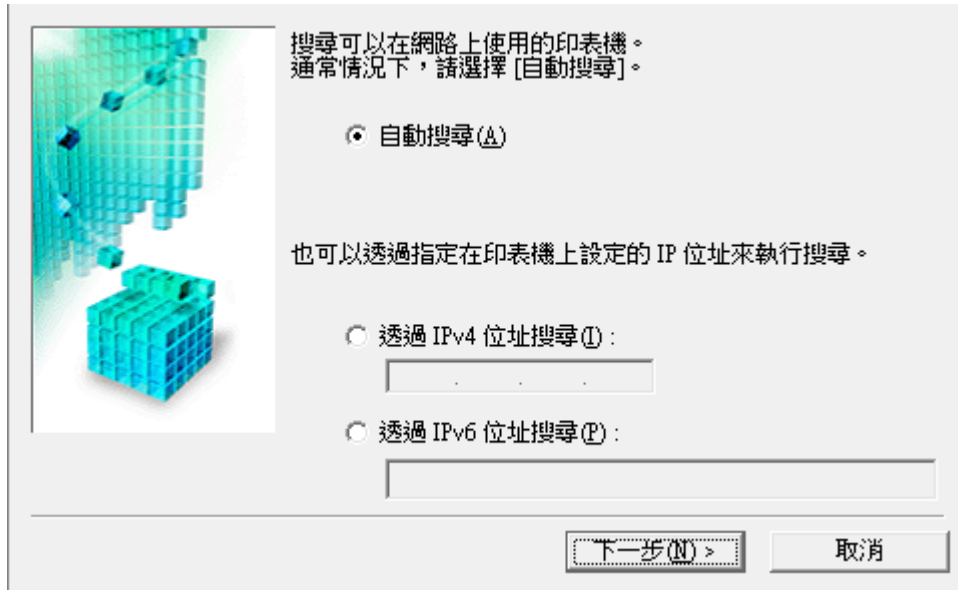

搜尋可以在網路上使用的印表機。
通常情況下，請選擇 [自動搜尋]。

自動搜尋(A)

也可以透過指定在印表機上設定的 IP 位址來執行搜尋。

透過 IPv4 位址搜尋(I):
[]

透過 IPv6 位址搜尋(I):
[]

[下一步(N) >] [取消]

8. 正在搜尋印表機，請稍候

Searching the printer, please wait



正在搜尋網路上的印表機。

[取消]

9. 按“下一步”

Click “Next”



在網路上偵測到以下印表機。
從 [偵測到的印表機] 中選擇您想要使用的印表機然後按一下 [下一步]。

IPv4 裝置 | IPv6 裝置

偵測到的印表機(I):

型號	MAC 位址	IP 位址
MG3000 series	CC:42:8D:25:00:14	192.168.0.182

[更新(U)]


如果您要使用的印表機未列出，按一下 [更新]。如果仍未偵測到印表機，勾選 [檢查印表機設定] 然後按一下 [下一步]。

檢查印表機設定(C)

[使用說明(I)] [< 上一步(B)] [下一步(N) >] [取消]

10. 請等待安裝驅動程式

Please wait for driver installation

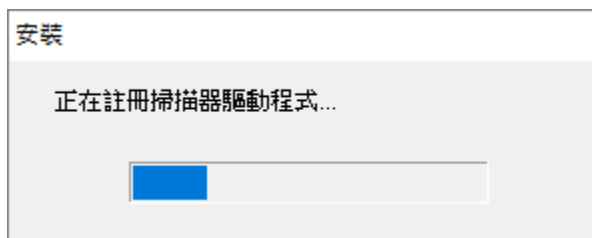

11. 按“完成”結束

Click "Complete" to finish



-完-
-End-