

MF756Cx – 傳真轉寄至 SMB

MF756Cx – Forwarding Fax To SMB

- 確認印表機電源已開啟及已完成網絡連線設定

Confirm the printer is powered on and completed the [network connection settings](#)

- 在首頁中按「狀態確認」

Tap “Status Monitor” on the home screen



- 檢查 IP 位址

Check the IP Address




4. 在電腦瀏覽器網址欄輸入印表機 IP 位址

Enter the IP address in the address bar of internet browser

如輸入 IP 位址後出現以下網頁，請以系統管理員模式登入遠端控制台，並按此繼續餘下步驟

If below webpage appear after entering the IP address, please login with System Manager Mode, and [click here to continue](#) with the remining steps

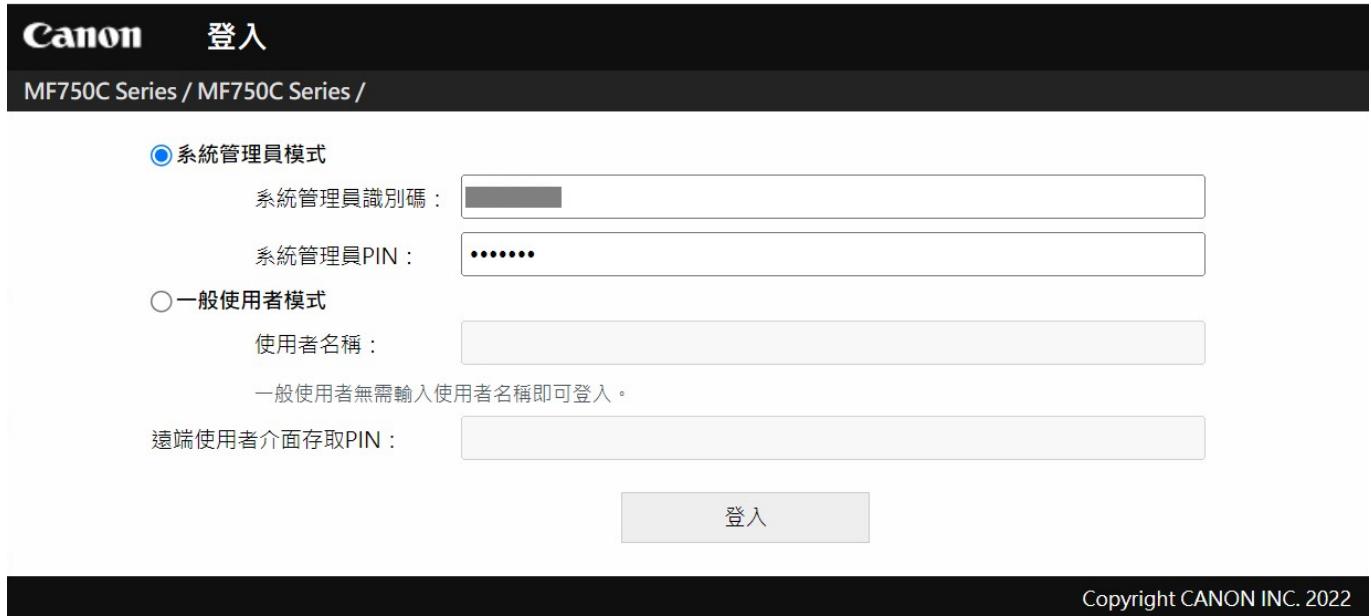


The screenshot shows the Canon MF750C Series login interface. At the top left is the Canon logo and the word "登入". Below it is the text "MF750C Series / MF750C Series /". There are two radio button options: one selected for "系統管理員模式" (System Manager Mode) and one for "一般使用者模式" (General User Mode). Under "System Manager Mode", there are fields for "系統管理員識別碼" (System Manager ID) containing a redacted value and "系統管理員PIN" (System Manager PIN) containing "*****". Under "General User Mode", there is a field for "使用者名稱" (User Name) which is empty. Below these fields is the note "一般使用者無需輸入使用者名稱即可登入。" (General users do not need to enter a user name to log in.). There is also a field for "遠端使用者介面存取PIN" (Remote UI Access PIN) which is empty. At the bottom center is a large "登入" (Login) button.

Copyright CANON INC. 2022

如輸入 IP 位址後出現以下提示，請按此繼續並在裝置上設定[遠端使用者介面存取 PIN]或[系統管理員識別碼]和[系統管理員 PIN]

If below message appear after entering the IP address, please [click here to continue](#) and configure a [Remote UI Access PIN], or a [System Manager ID] and [System Manager PIN] on the device.

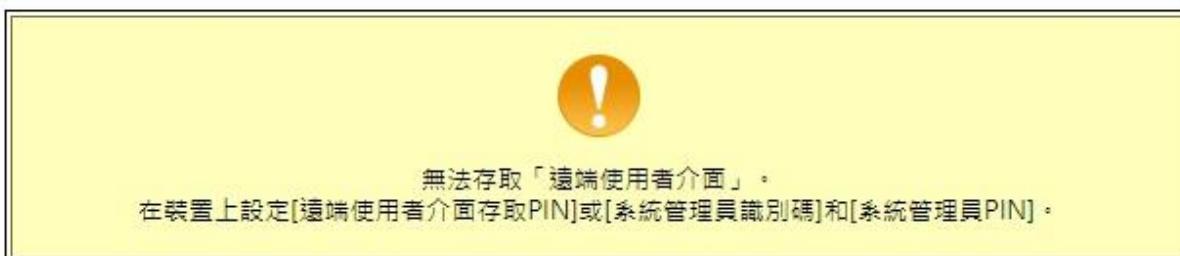


5. 如要設定[系統管理員識別碼]和[系統管理員 PIN]，請按「功能表」

For configure a [System Manager ID] and [System Manager PIN], please tap "Menu"




6. 按「管理設定」

Tap "Management Settings"

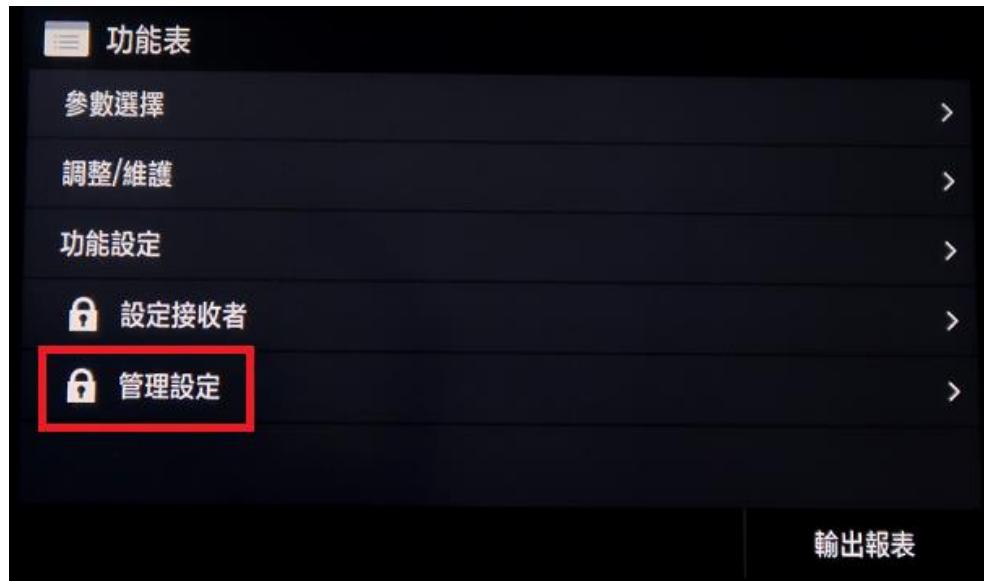

7. 輸入[系統管理員識別碼]和[PIN]，預設是 7654321，再按「登入」
Enter the [System Manager ID] and [PIN], default is 7654321, then tap "Login"

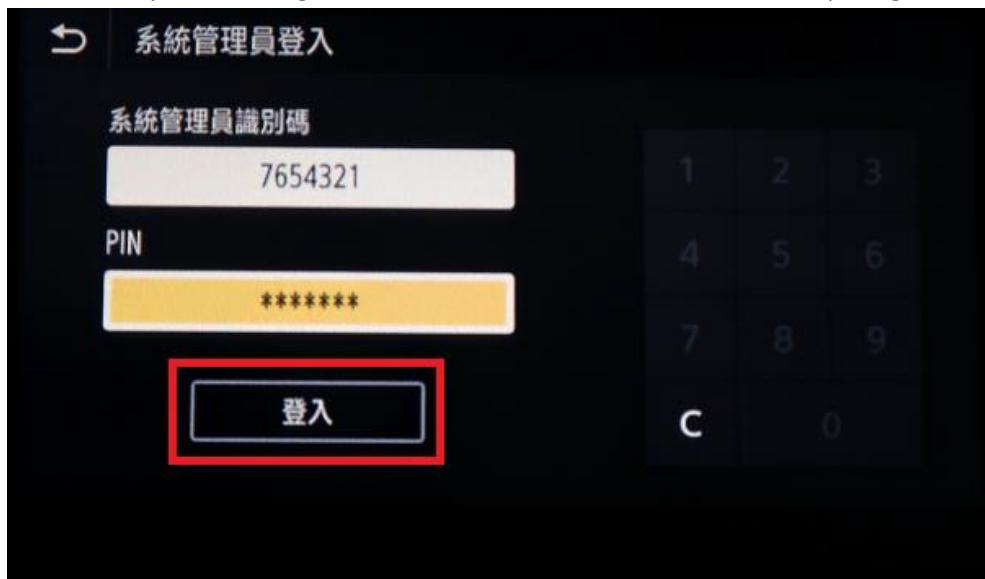

8. 按[使用者管理]
Tap [User Management]



9. 按[系統管理員資訊設定]

Tap [System Manager Information Settings]



10. 按[系統管理員識別碼和 PIN]

Tap [System Manager ID and PIN]




11. 輸入自訂系統管理員識別碼，再按「套用」

Enter a System Manager ID, then tap "Apply"


重要事項：請緊記系統管理員識別碼及 PIN，如忘記識別碼或 PIN，必須要安排維修及重設打印機

Important: Please remember the System Manager ID and PIN. If you forget the ID or PIN, must arrange repair and reset printer.

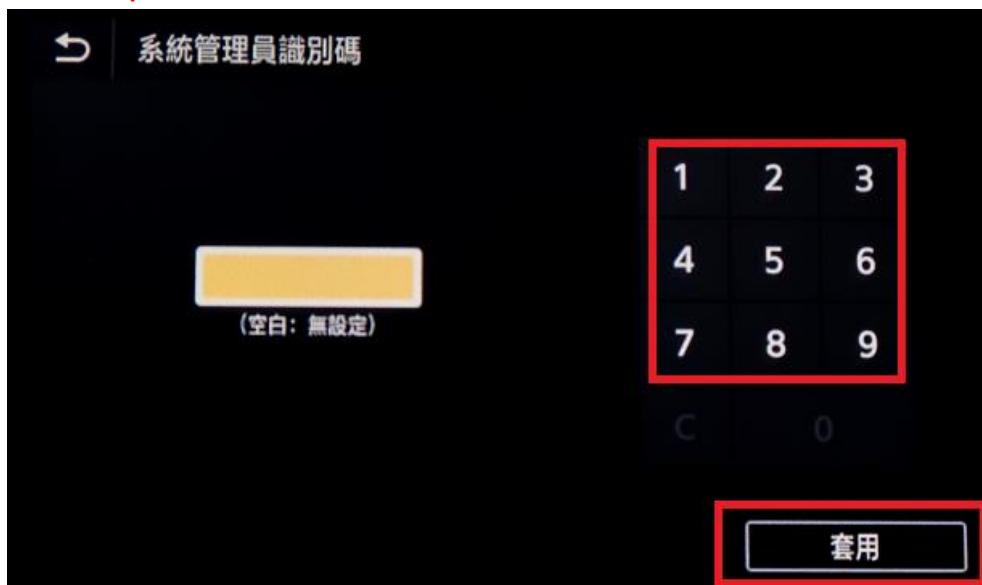


12. 輸入兩次自訂系統管理員 PIN，再按「套用」

Enter a System Manager PIN twice, then tap "Apply"

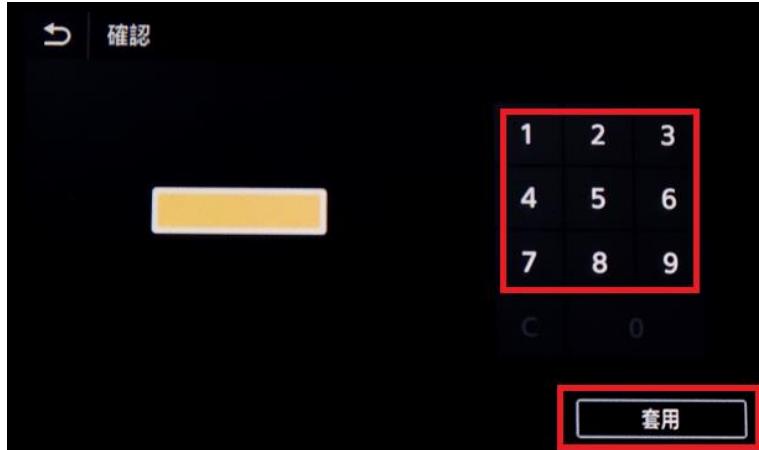

13. 完成後使用新的系統管理員識別碼及 PIN 登入遠端介面，並繼續餘下步驟

Login with the new System Manager ID and PIN on remote UI, then continue with the remaining steps

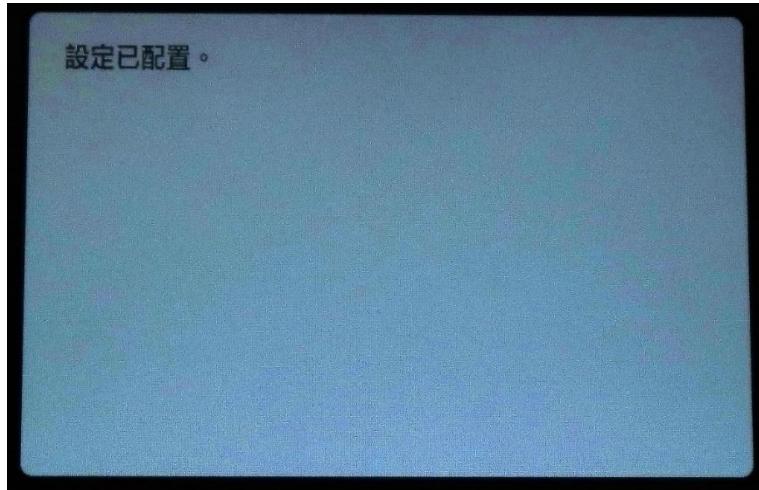

Canon 登入

MF750C Series / MF750C Series /

系統管理員模式

系統管理員識別碼 :

系統管理員PIN : ······

一般使用者模式

使用者名稱 :

一般使用者無需輸入使用者名稱即可登入。

遠端使用者介面存取PIN :

Copyright CANON INC. 2022

14. 按「通訊錄」

Click "Address Book"

The screenshot shows the 'imageCLASS' remote user interface for the 'MF750C Series'. At the top, it displays the device name 'MF750C Series' and the language setting 'Chinese (Traditional)'. On the left, there's a sidebar with sections like '裝置基本資訊', '裝置狀態' (Device Status), '錯誤資訊' (Error Information), and '消耗品資訊' (Consumable Information). On the right, there are several icons with labels: '狀態確認/取消' (Status Confirmation/Cancellation), '設定/註冊' (Settings/Registration), '通訊錄' (Address Book), and 'Application Library'. The 'Address Book' icon is highlighted with a red border.

15. 選擇任何一個「未註冊」的項目

Choose either one of "Not Registered"

The screenshot shows the 'Address Book' screen for the 'MF750C Series'. The title bar indicates 'MF750C Series / MF750C Series /' and has a 'Address Book' icon. The main area is titled '我的最愛' (My Favorites) and shows a table of contacts. The table has columns for '編號' (Number), '類型' (Type), '名稱' (Name), and '接收者' (Recipient). There are four entries, all labeled '未註冊' (Unregistered) under the 'Name' column. The first entry, '01' with '未註冊', is highlighted with a red border. Each entry has a '刪除' (Delete) button to its right.

編號	類型	名稱	接收者
01	•	未註冊	<button>刪除</button>
02	•	未註冊	<button>刪除</button>
03	•	未註冊	<button>刪除</button>
04	•	未註冊	<button>刪除</button>


16. 選擇「檔案」，然後按「確定」

Choose "File", then click "OK"



17. 輸入名稱、主機名稱、資料夾路徑、使用者名稱及密碼，然後按「確定」

Enter the name, Host Name, Folder Path, User Name and Password, then click "OK"

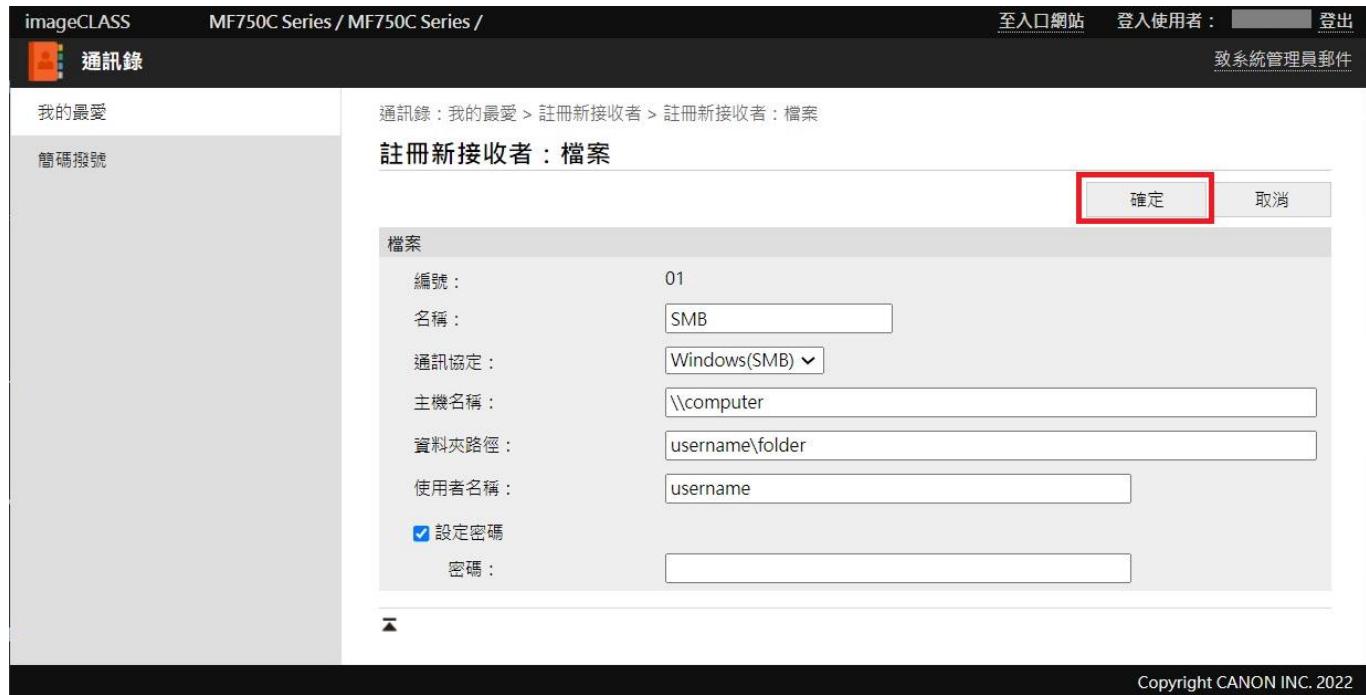

18. 如要設定傳真轉寄，請按「接收／轉寄設定」，再按「傳真接收設定」

If you need to setup FAX forwarding, please click "RX/Forwarding Settings", then click "Fax RX Settings"

The screenshot shows the printer's web-based configuration interface. The top navigation bar includes links to '至入口網站' (Home), '登入使用者' (Log In), '登出' (Logout), and '致系統管理員郵件' (Email the System Administrator). The main title is 'imageCLASS MF750C Series / MF750C Series / 設定/註冊'. On the left, a sidebar lists various settings categories: 重新啟動裝置, 參數選擇, 紙張設定, 顯示設定, 定時器設定, 網路設定, 外部介面設定, 可存取性設定, 音量控制, 功能設定, 一般設定, 影印設定, 印表機設定, 傳送設定, and 接收/轉寄設定. The '接收/轉寄設定' option is highlighted with a red box. The main content area shows the path '設定/註冊 : 功能設定 : 接收/轉寄設定' followed by '接收/轉寄設定'. Under '接收/轉寄設定', there are three sub-options: 一般設定, 網際網路傳真設定, and 傳真接收設定, with the latter also highlighted with a red box.

19. 按轉寄設定的「編輯」

Click "Edit" in Forwarding Settings

The screenshot shows the 'Fax RX Settings' page. The top navigation bar is identical to the previous screenshot. The main title is '設定/註冊 : 功能設定 : 接收/轉寄設定 > 傳真接收設定'. The left sidebar includes the same list of settings categories as before. The main content area has two tabs: '基本設定' and '轉寄設定'. The '基本設定' tab is active, displaying various fax receiver configurations. The '轉寄設定' tab is shown below it. A red box highlights the '編輯...' button next to the '雙面列印' (Duplex Print) setting. Another red box highlights the '編輯...' button at the bottom right of the '轉寄設定' section.

設定	狀態
雙面列印 :	關閉
ECM接收 :	開啟
響鈴音 :	開啟
響鈴次數 :	2
遠端接收 :	開啟
遠端接收識別碼 :	25
切換至自動接收 :	關閉
接收開始速度 :	33600 bps
縮小接收尺寸 :	開啟
縮小模式 :	自動
縮小方向 :	僅縱向

轉寄設定

設定	狀態
使用轉寄功能 :	關閉

20. 選擇「使用轉寄功能」，再按「從通訊錄中選擇」

Check "Use Forwarding Function", then click "Select from Address Book"



21. 選擇接收者，再按「確定」

Select the destination and click "OK"



22. 按「確定」，設定完成

Click "OK"; Setup is completed



23. 接收的傳真會轉寄至所選的 SMB 位置

Received fax will forward to your selected SMB location

-完-

-End-