

## MF229w 安裝 MAC 透過無線 LAN 連線連接印表機之驅動程式步驟 The Driver installation procedure for MF229w (Via Wi-Fi)

先將打印機連接到路由器，詳細可參考以下步驟：  
(The Connection by selecting a wireless router)

1. 在主畫面中點選「功能表」  
(Tap “Menu” in the Home Screen)

2. 點選「網路設定」  
(Tap “Network Settings”)

- 若顯示 PIN 碼輸入畫面，請使用數字鍵輸入 PIN 碼，然後點選「套用」  
- If a screen for entering a PIN is displayed, enter the PIN with the numeric keys and tap “Apply”  
-

3. 點選「無線區域網路」  
(Tap “Select Wired/Wireless LAN” and tap Wireless LAN)

- 若顯示 <是否啟用無線區域網路？> 訊息，點選 <是>  
- If display “DO you Want to use the wireless LAN to connect the computer?”, Tap “Yes”



4. 點選 <SSID 設定> (Tap “SSID setting”)




5. 點選 <選擇存取點> (Tap “Select Access Point”)



6. 選擇無線區域網路路由器

選擇與您記下的 SSID 相符的路由器

(Select the router who's SSID matches the one that you have written down)

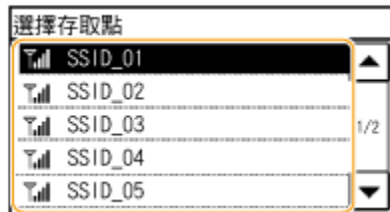


7. 輸入您記下的網路鍵值


使用數字鍵輸入網路金鑰(路由器密碼)，然後點選 <套用>

(Enter the network key using the numeric keys, and tap “Apply”)

#### WEP

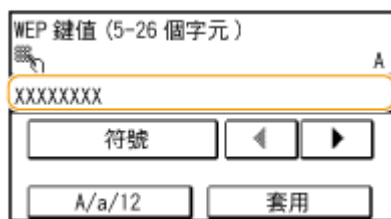

#### WPA-PSK 或 WPA2-PSK

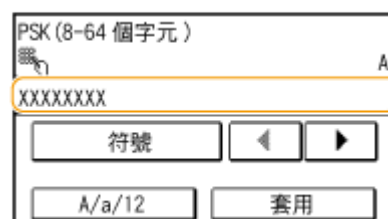


8. 點選 <是>

(Tap “yes” for “Do you want to connect for the new setting?”)



9. 確認控制面板上的 Wi-Fi 指示燈閃爍  
偵測到無線路由器時，Wi-Fi 指示燈閃爍  
(The Wi-Fi indicator blinks when a wireless router is detected)

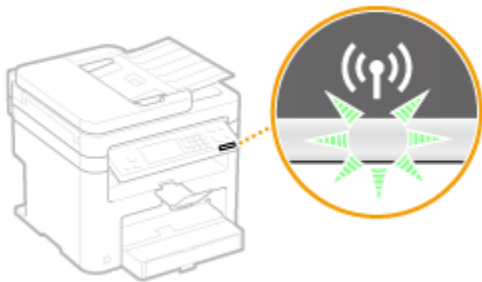

10. 設定完成時，會顯示以下畫面，約 2 秒後 Wi-Fi 指示燈隨即亮起  
(When the setup is completed, the screen below is displayed, and approximately 2 seconds later, the Wi-Fi indicator lights up)



- 等待約 2 分鐘，直到本機的 IP 位址設定完成  
(Wait approximately 2 minutes until the IP address settings of the machine are completed)

## 下載及安裝步驟

### (Download and Driver Installation Procedure)

11. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式

(Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver)

12. 按「MF\_Printer\_Installer.pkg」(Open “MF\_Printer\_Installer.pkg”)



13. 按「繼續」(Choose “Next”)



14. 按「繼續」及「同意」(Choose “Next” and then choose “Agree”)



15. 按「安裝」(Choose "Install")



16. 等待軟件安裝 (Waiting for the installation progress)




17. 按「關閉」以完成打印驅動程式安裝(Choose “Close”)



18. 到佳能網站 <https://hk.canon/en/support> , 選擇相關的印表機型號及下載印表機的驅動程式  
(Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver)

19. 按「Canon\_FAX\_Installer.pkg」(Open “Canon\_FAX\_Installer.pkg”)

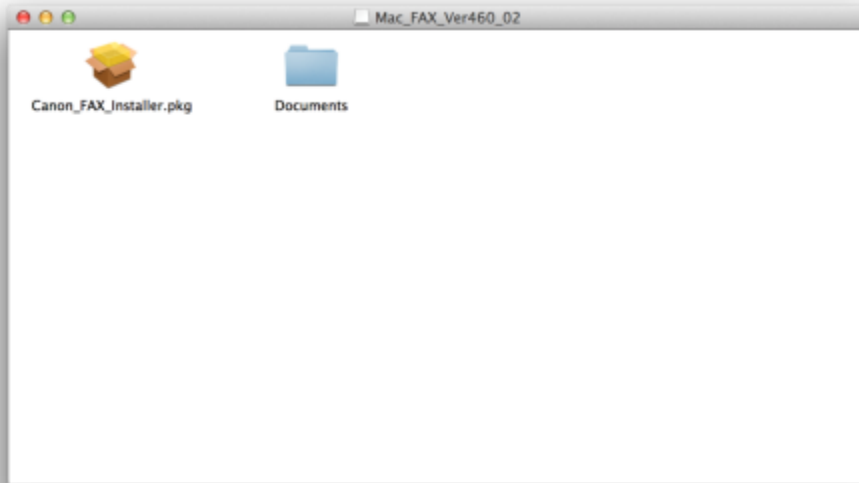

20. 按「繼續」(Choose “Continue”)



21. 按「繼續」及「同意」(Choose “Continue “and then choose” Agree”)





22. 按「安裝」(Choose Install)



23. 等待軟件安裝 (Waiting for the installation progress)




24. 按「關閉」以完成傳真驅動程式安裝 (Choose "Close")



25. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式

(Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver)

26. 按「Canon\_ScanGear\_MF.pkg」(Open “Canon\_ScanGear\_MF.pkg”)

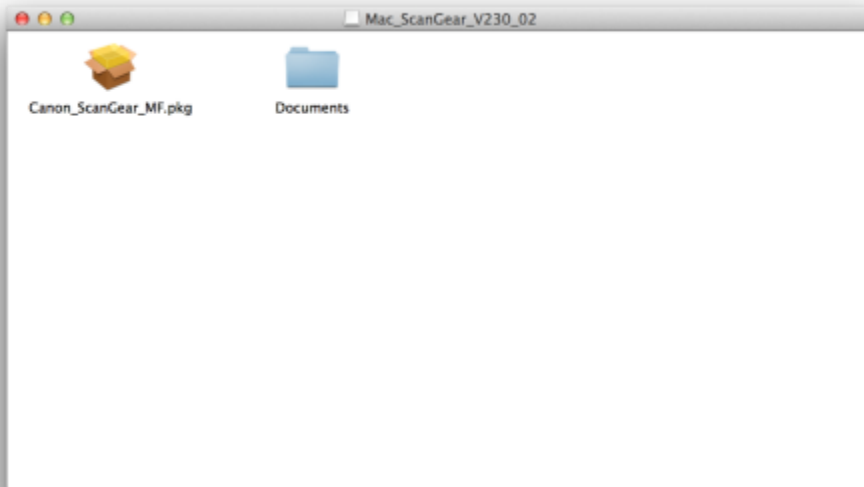

27. 按「繼續」(Choose “Continue”)



28. 按「繼續」及「同意」(Choose “Continue” and then choose “Agree”)



29. 按「安裝」(Choose “Install”)



30. 等待軟件安裝 (Waiting for the installation progress)



31. 按「關閉」以完成掃描驅動程式及軟件安裝 (Choose "Close")



32. 完成安裝驅動程式後需新增印表機，到「系統偏好設定」，選「印表機與掃描器」  
(Go to “System Preferences” and choose “Print and Scan”)



33. 選取左下角「+」按鈕，選「加入印表機或掃描器」  
(Click the “+” button and choose “Add printer or Scanner”)



34. 名稱選擇「Canon MF220」，使用選擇「Canon MF220」按「加入」，新增印表機驅動程式

(Choose the Name with Canon MF 220 Series on the “Use “and Click “add”)



35. 再一次按左下角「+」按鈕，選「加入印表機或掃描器」，名稱選擇「Canon MF 210」，使用選擇「Canon MF210 Series FAX」按「加入」，新增傳真驅動程式

(Click the “+” button and select “add printer or scanner”, choose the Name with Canon MF 210 Series Fax on the “Use “and Click “add”)






36. 網絡掃描需新增掃描器到 MF Toolbox，到電腦「應用程式」>「Canon MF Utilities」開啟 MF Toolbox，第一次開啟會出現以下警告

(Need to add the network scanner to the MF toolbox, go to “Application “-> “Canon MF Utilities” to run the MF toolbox, and it will have a warning message at the first time)



37. 按左上角「MF Toolbox」，選「網路掃描器設定」


(Click the “MF Toolbox” on the top left corner, and choose “Network Scanner Setting”)

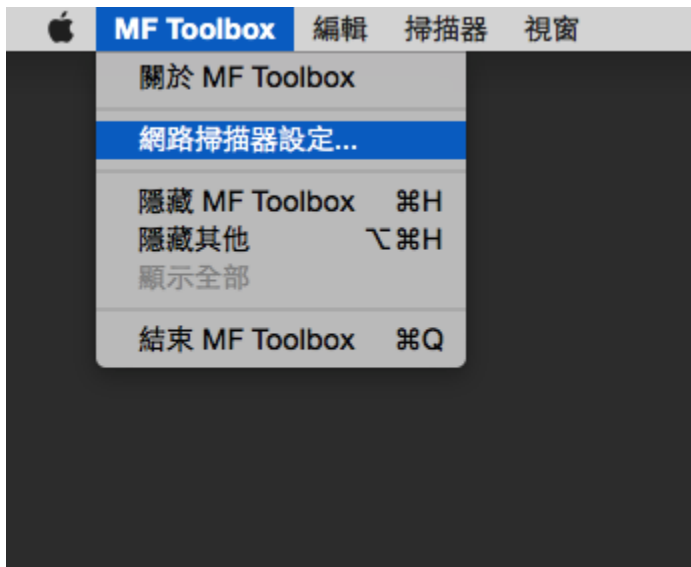

38. 按左下角「+」號新增掃描器  
(Click the “+” button)



39. 選擇「Canon MF220」，按「新增」  
(Choose “Canon MF220” and then click “add”)

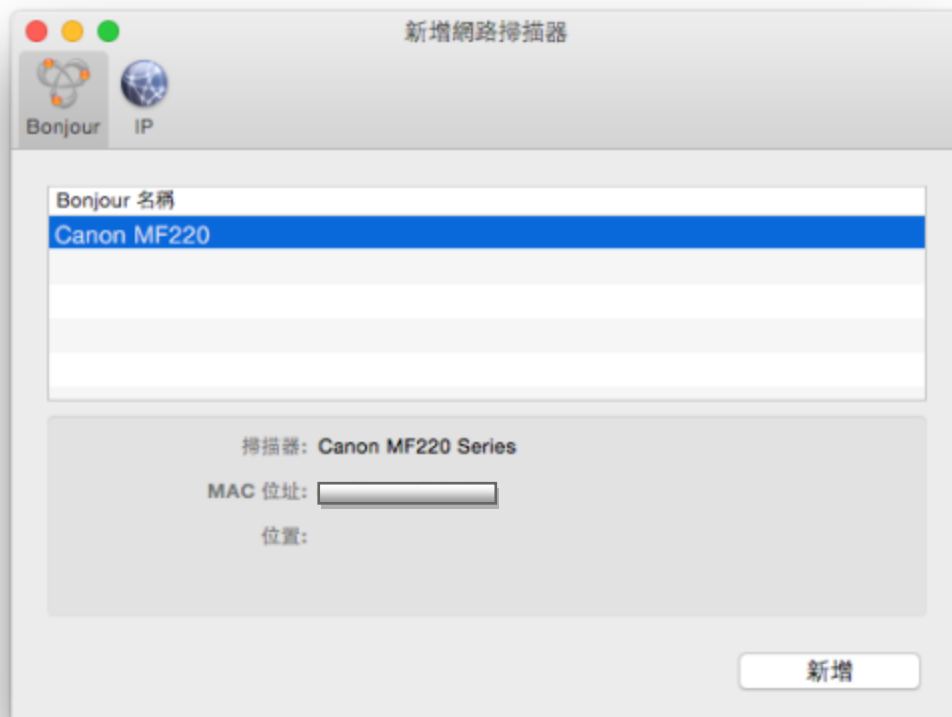

40. 完成以上設定後已可使用 MF229w 作打印及掃描功能  
(setting finished and the print and scan functions are ready to use)

-完-  
-End-