

在 MAC OS X 以 USB 接駁安裝 G3000 驅動程式步驟 (以 OS X 10.11 作示範)
G3000 printer driver Installation Guide for MAC OS X (Via USB) (OSX 10.11 as example)

點擊以下連結下載有關之驅動程式:


<http://ugp01.c-ij.com/ij/webmanual/WebPortal/PTL/ptl-setup.html?lang=tc&type=setup&area=hk&model=g3000&os=m>

Click below link for download printer driver:


<http://ugp01.c-ij.com/ij/webmanual/WebPortal/PTL/ptl-setup.html?lang=en&type=setup&area=hk&model=g3000&os=m>

下載及安裝步驟


1. 按一下「下載」。下載完成後開啟該檔案安裝，點擊「Setup」
Click "Download". Open the file after download completed, click "Setup"

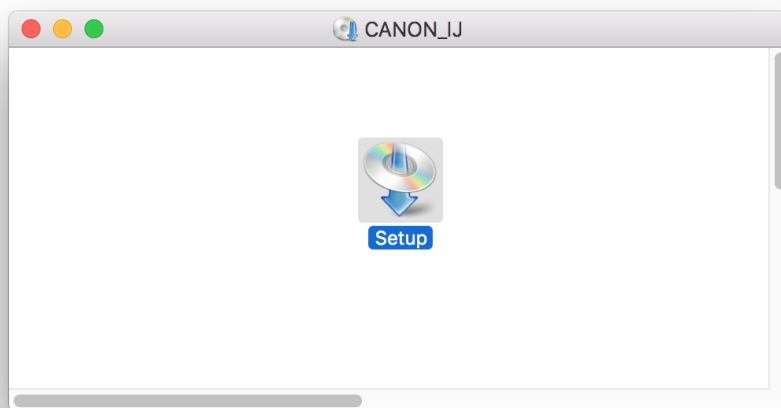


2. 按「下一步」
Click "Next"

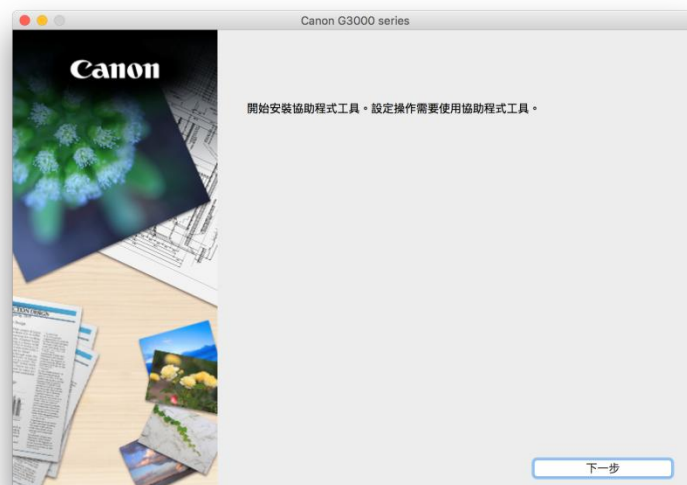

- 按「開始設定」
Click “Start Setup”

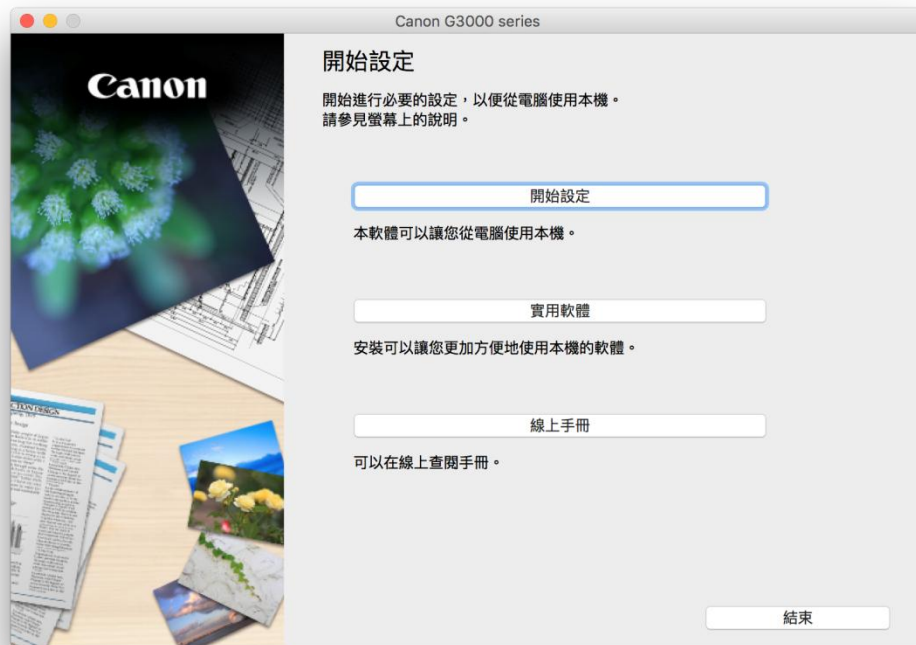


- 選擇「亞洲」、「香港特別行政區」，按「下一步」
Select “Asia”, “Hong Kong SAR China”, click “Next”

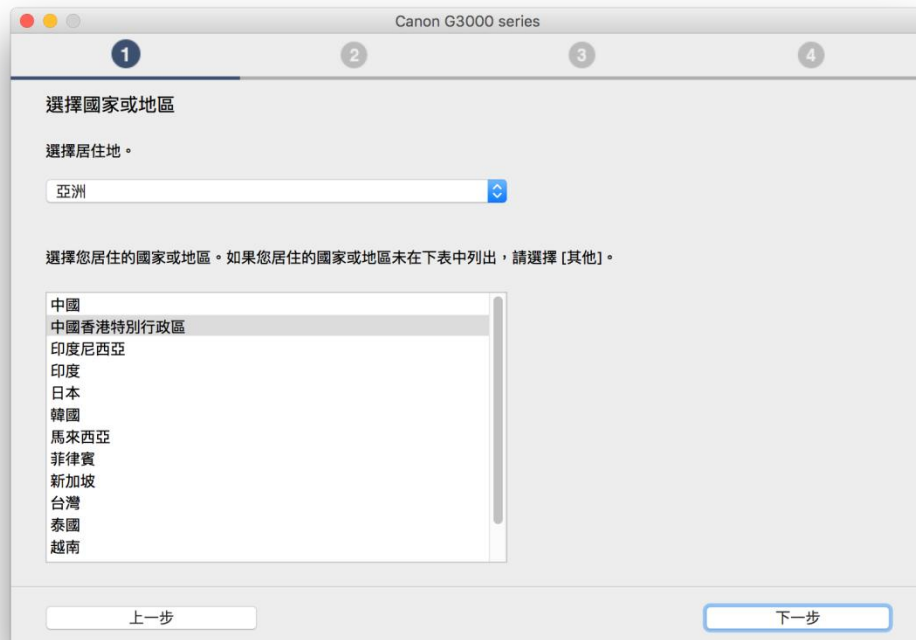

5. 按「是」
Click “Yes”



6. 選擇「同意」或「不同意」作傳送資訊至 Canon
Select “Agree” or “Disagree” to send information to Canon Extended Survey Program

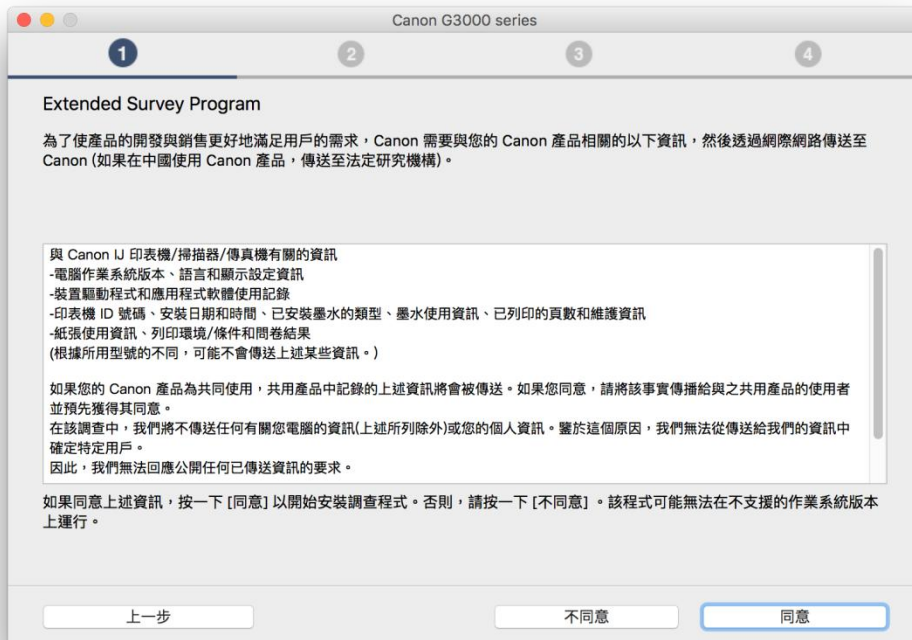

- 選擇「USB 連接」，按「下一步」
Select "USB Connection", click "Next"



- 等待電腦下載及安裝驅動程式
Wait for download completed and install printer driver



9. 印表機連接，按「下一步」
Connect printer and computer with USB cable, click "Next"




10. 推薦列印頭校準，按「下一步」
Print head alignment recommended, click "Next"




11. 建議可按「執行」列印測試頁，如發生列印錯誤需重新安裝
Suggest to click “Execute” for printing test page. If a print error occurs, follow the on-screen instructions to start the setup again



12. 驅動程式安裝完成，安裝軟件請按「下一步」
Driver installation completed, click “Next” to install software

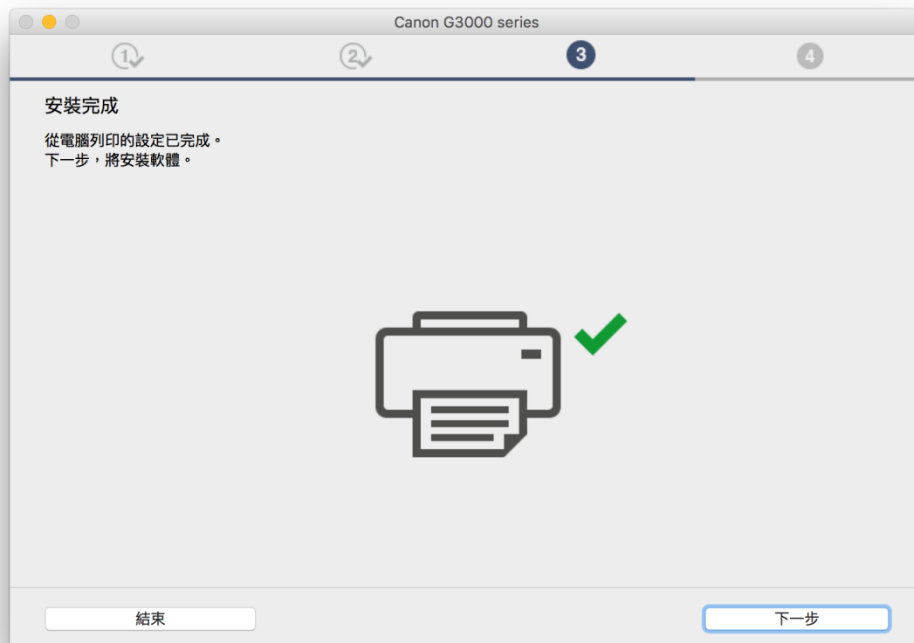

13. 在軟體安裝清單勾選所需軟件，按「下一步」
Select software to install and click “Next”

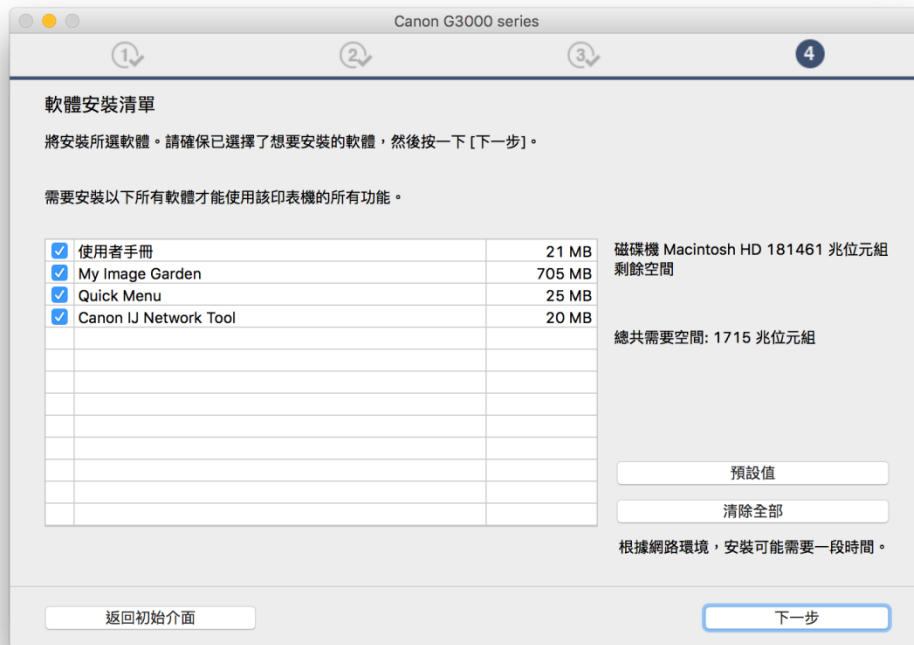

14. 在桌面上創建別名，選擇「同意」或「不同意」，按「下一步」
Create an alias on desktop, select “Agree” or “Do not agree”, click “Next”



15. 等待軟件安裝完成
Wait for software installation complete



16. 按「結束」完成安裝
Click "Finish" to complete installation



17. 按一下電腦左上角 < 蘋果 > 圖案，選擇 <系統偏好設定>，再選擇 <印表機和掃描器> (Printers & Scanners)。

Click the top left corner of the computer < 蘋果 > icon, click <System Preferences>, and then click <Printers and Scanners>.



18. 於 [列印和掃描器 (Printers & Scanners)] 視窗，按一下「+」按鈕加入印表機
In the [Printers & Scanners] window, click the "+" button to register the printer



19. 選擇 Canon G3000 Series，「種類」為「USB 多功能」，「使用」為「Canon G3000 Series」，按「加入」

Choose printer as Canon G3000 Series, confirm “Kind” as “USB Multifunction” and “Use as” “Canon G3000 series”, then click “Add”



20. 新增印表機完成，驅動程式安裝完畢

After the printer is added, driver installation is completed



<完>
<END>