


透過乙太網路連接安裝MF416dw印表機的驅動程式步驟 (以Win 10作示範)

MF416dw printer driver Installation Guide for Windows via LAN connection (Win 10 as example)


使用乙太網路連接線接駁到印表機及開啟印表機

Connect the machine to a router by using a LAN cable and turn on computer

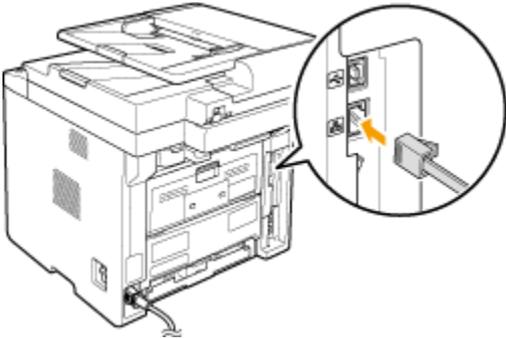


到佳能網站<http://support-hk.canon-asia.com/>，選擇相關的印表機型號及下載印表機的驅動程式
(Go to: <http://support-hk.canon-asia.com/> , select related printer model and download the printer driver)


1. 下載完成後，打開驅動程式 安裝檔案
Open driver installation file after downloaded
2. 按「Next >」
Click “Next >”

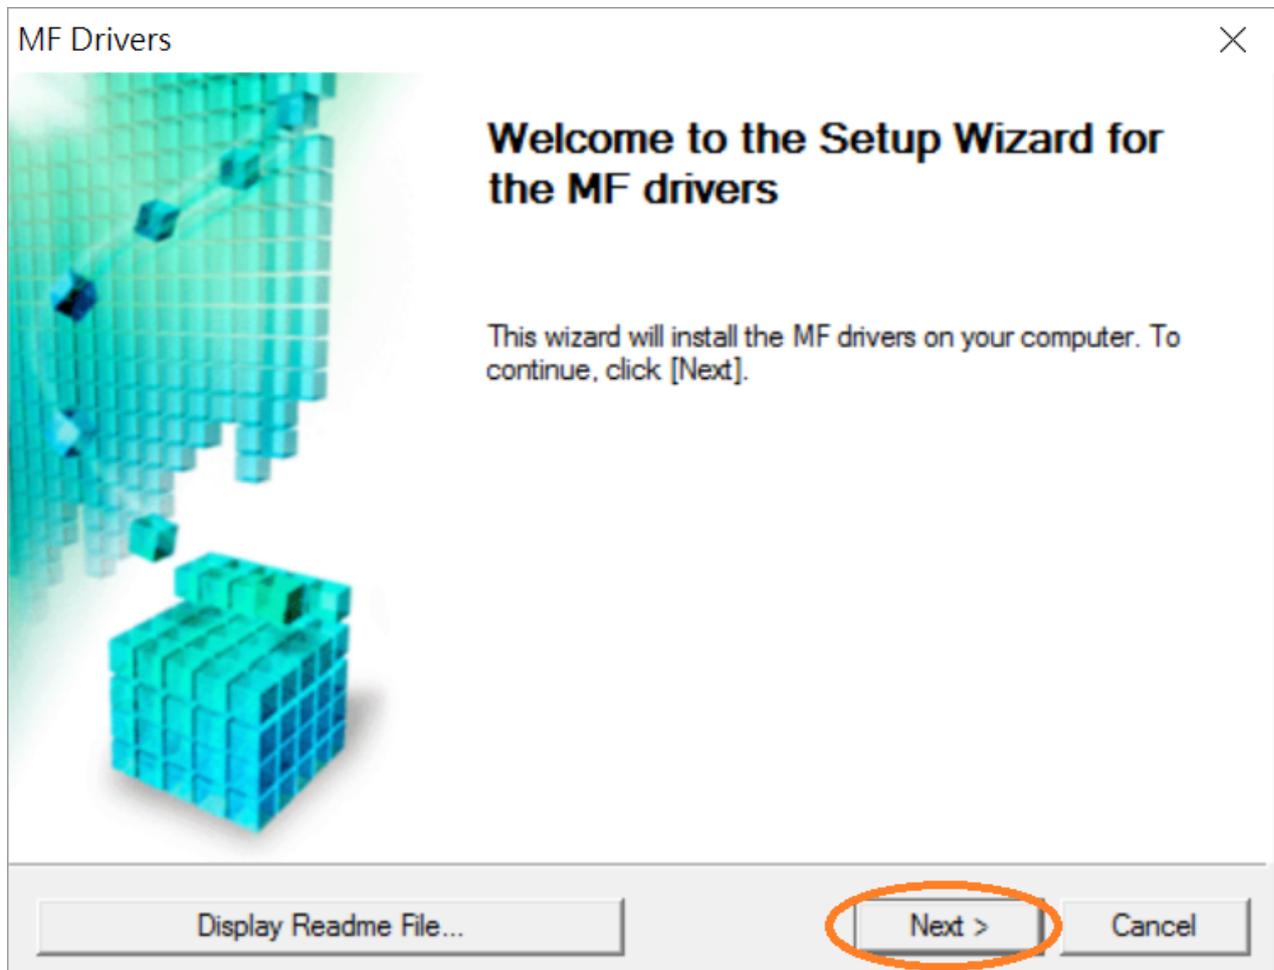


3. 按「Yes」
Click “Yes”

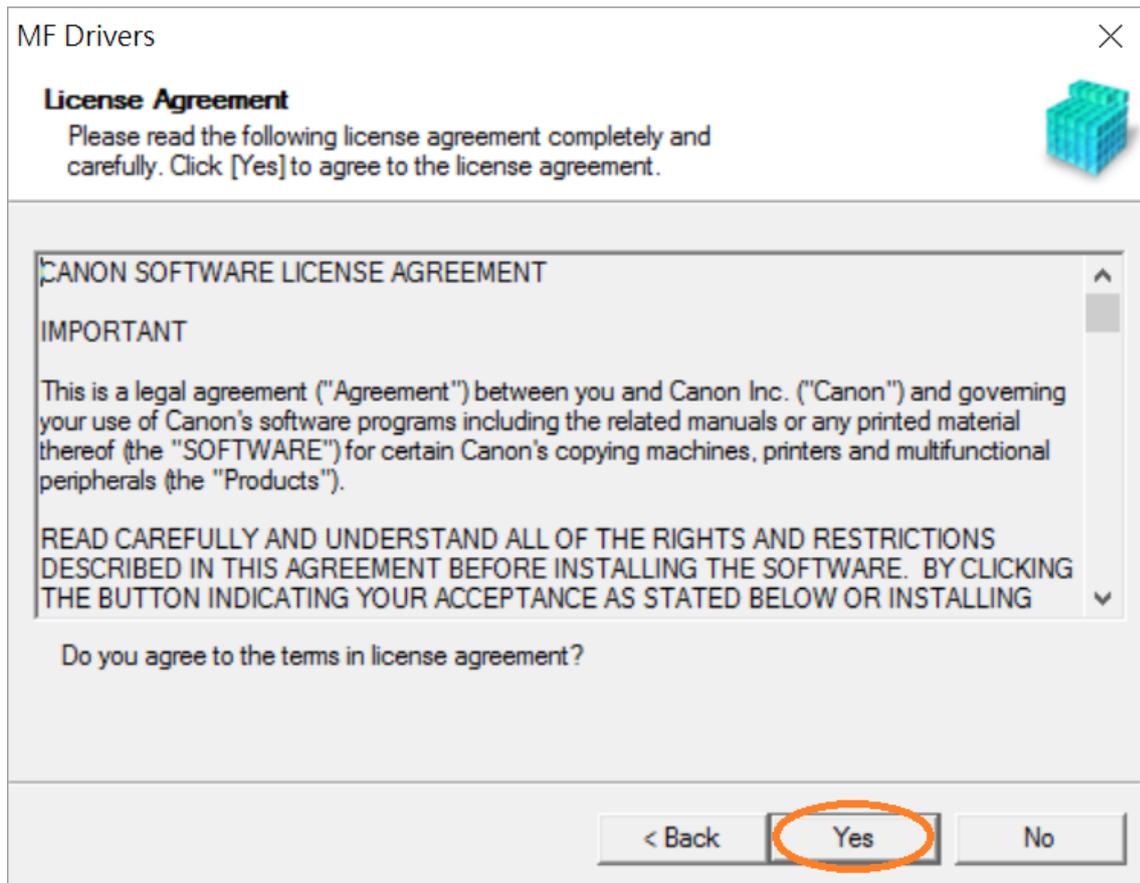


4. 選擇「Network Connection (for Network Models)」，按「Next >」
Select “Network Connection (for Network Models)”, click “Next >”

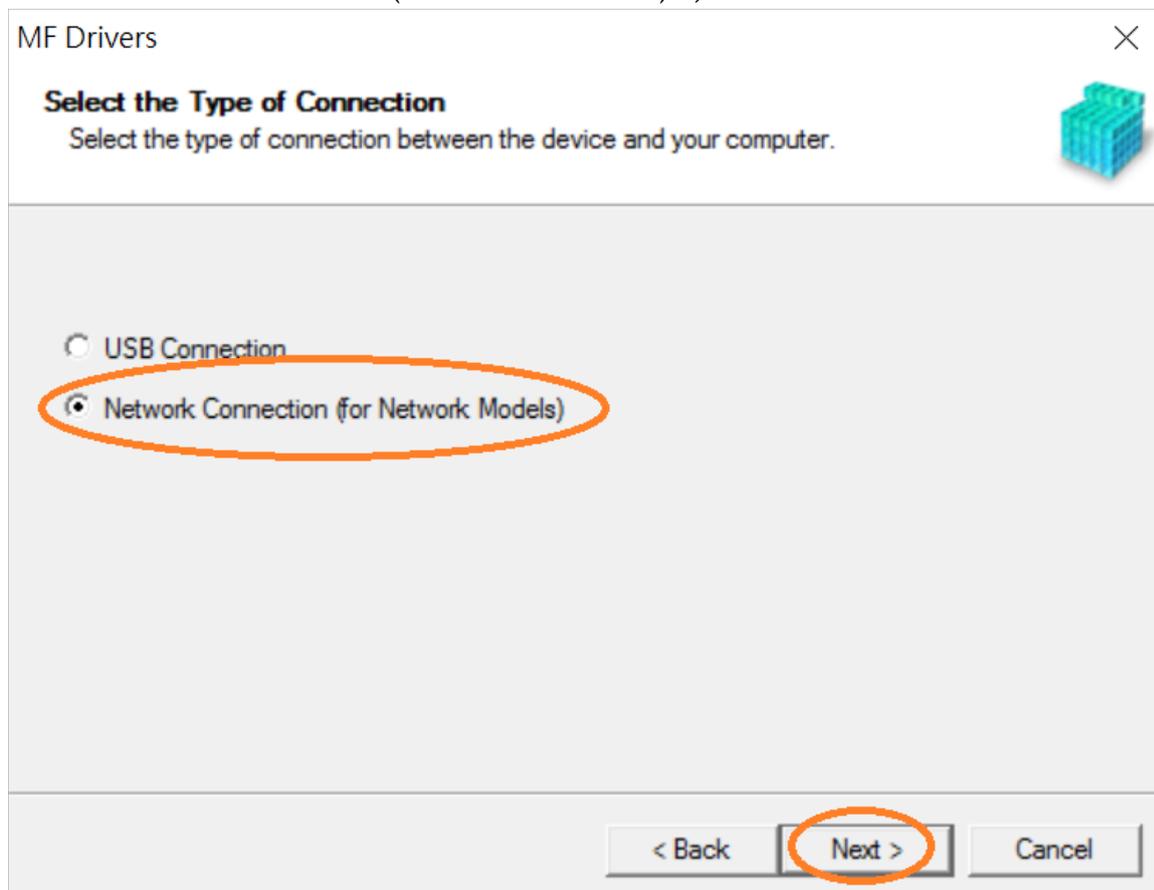

5. 按「是」
Click “Yes”

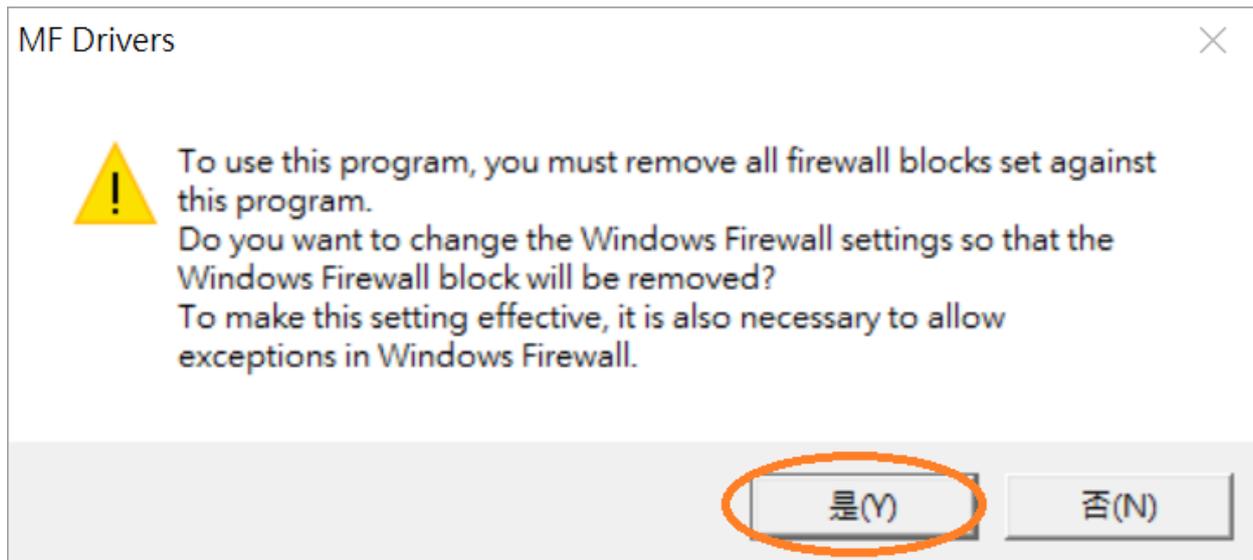

6. 選擇「MF410 Series」，按「Next >」
Select “MF410 Series”, click “Next >”

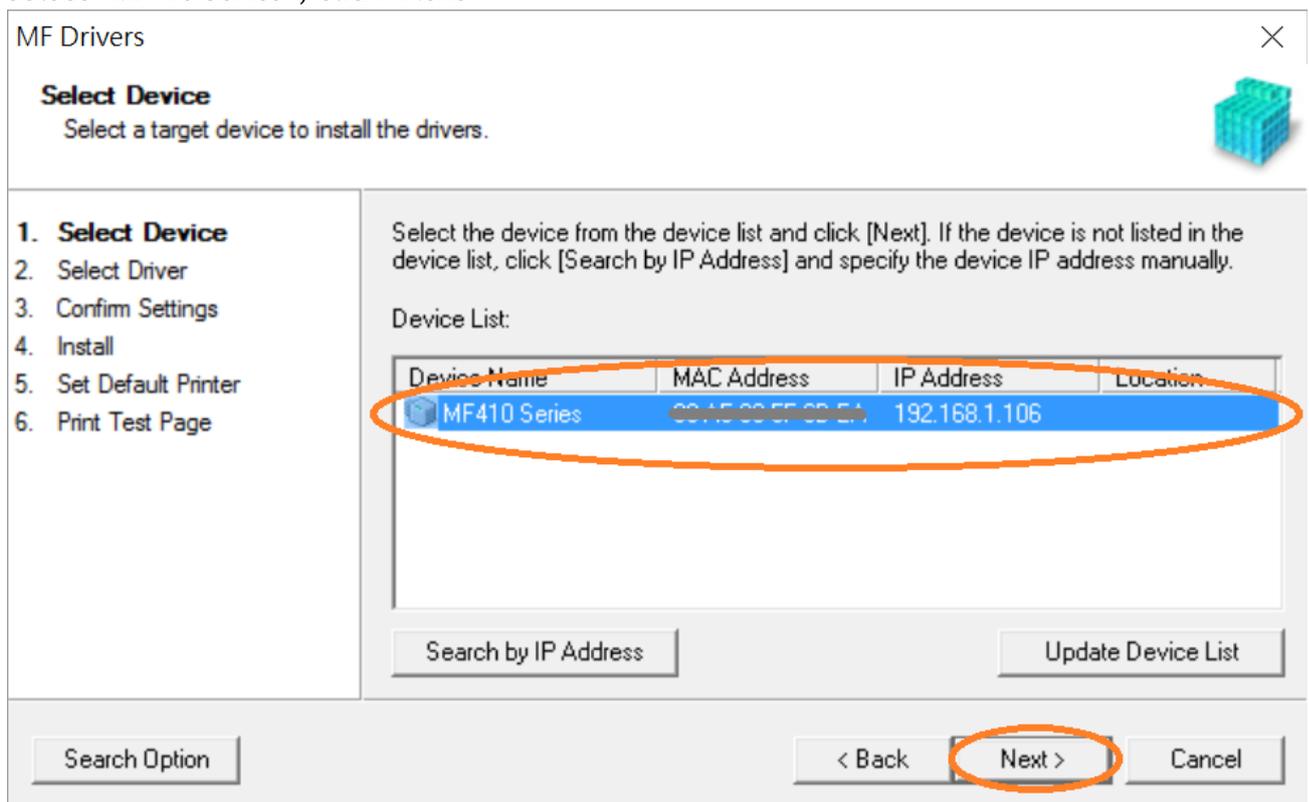

7. 確認已剔選「Printer」「Fax (for Supported Models)」「Scanner」，按「Next >」
Confirm the “Printer” “Fax (for Supported Models)” “Scanner” box is checked, click “Next >”

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Target Device
MF410 Series

Driver to Install:

Printer
 Fax (for Supported Models)
 Scanner

Canon Driver Information Assist Service
When you install this service and use shared or local printers, functions that allow you to obtain device information will be added to your computer.

< Back **Next >** Cancel

8. 選擇「UFR II Printer Driver」，按「Next >」
Select “UFR II Printer Driver”, click “Next >”

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Target Device
MF410 Series

Printer Drivers to Install:

UFR II Printer Driver
 PCL6 Printer Driver
 PS3 Printer Driver

< Back **Next >** Cancel

9. 按「Next >」
Click “Next >”

MF Drivers ×

Confirm Settings
Confirm the following setting details.



1. Select Device
2. Select Driver
- 3. Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the printer name. If you specify this printer as a shared printer, you can specify the shared printer name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Printer

Port: CNMFNP_00A5000F000E*

Driver: Canon MF410 Series UFR II

Printer Name:

Use as Shared Printer

Shared Name:

Current Device: 1
Number of Devices to Set: 2

10. 按「Next >」
Click “Next >”

MF Drivers ×

Confirm Settings
Confirm the following setting details.



1. Select Device
2. Select Driver
- 3. Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the fax name. If you specify this fax as a shared fax, you can specify the shared fax name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Fax

Port: CNMFNP_00A5000F000E*

Driver: Canon Generic FAX Driver (FAX)


Fax Name:

Use as Shared Fax


Shared Name:

Current Device: 2
Number of Devices to Set: 2


11. 按「Start」
Click “Start>”

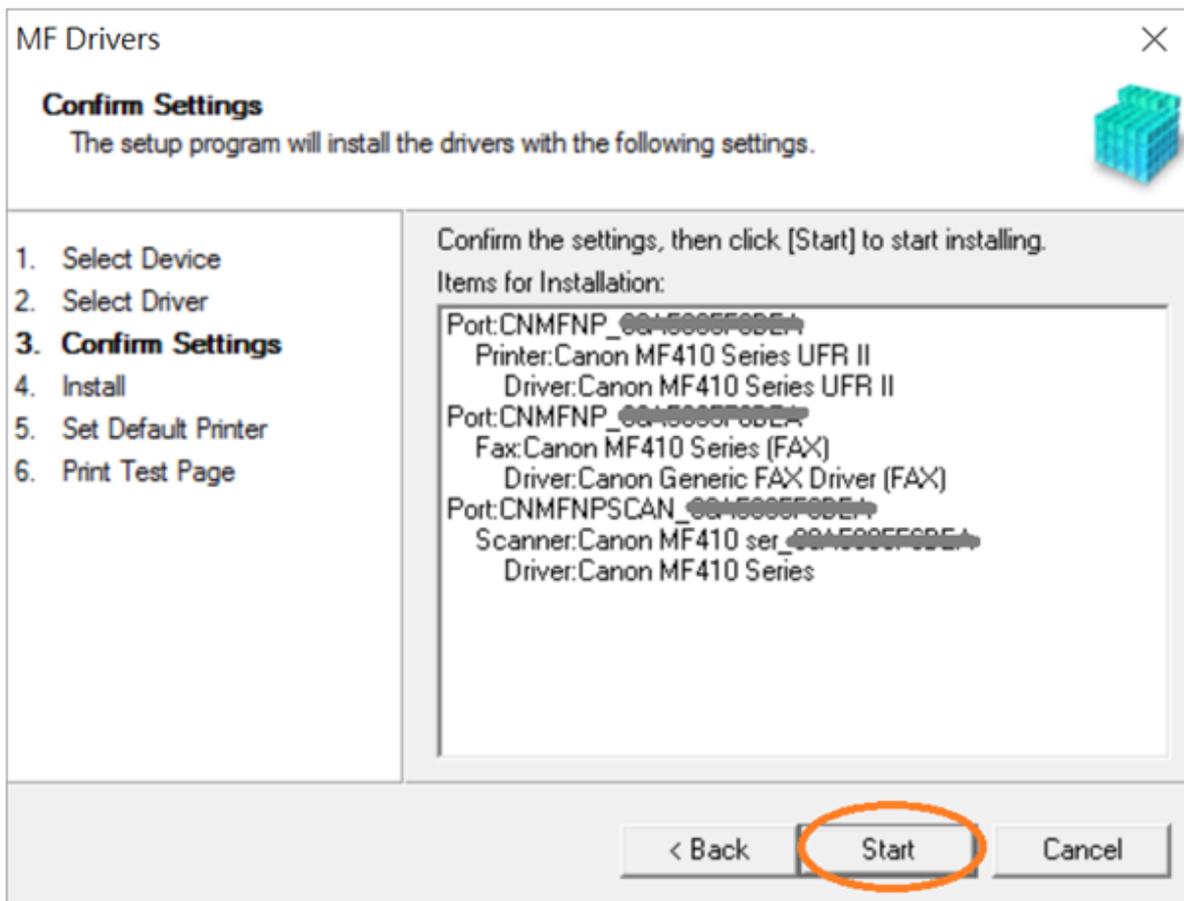


12. 請等待安裝精靈成完安裝
Please wait for the setup wizard to accomplish installation

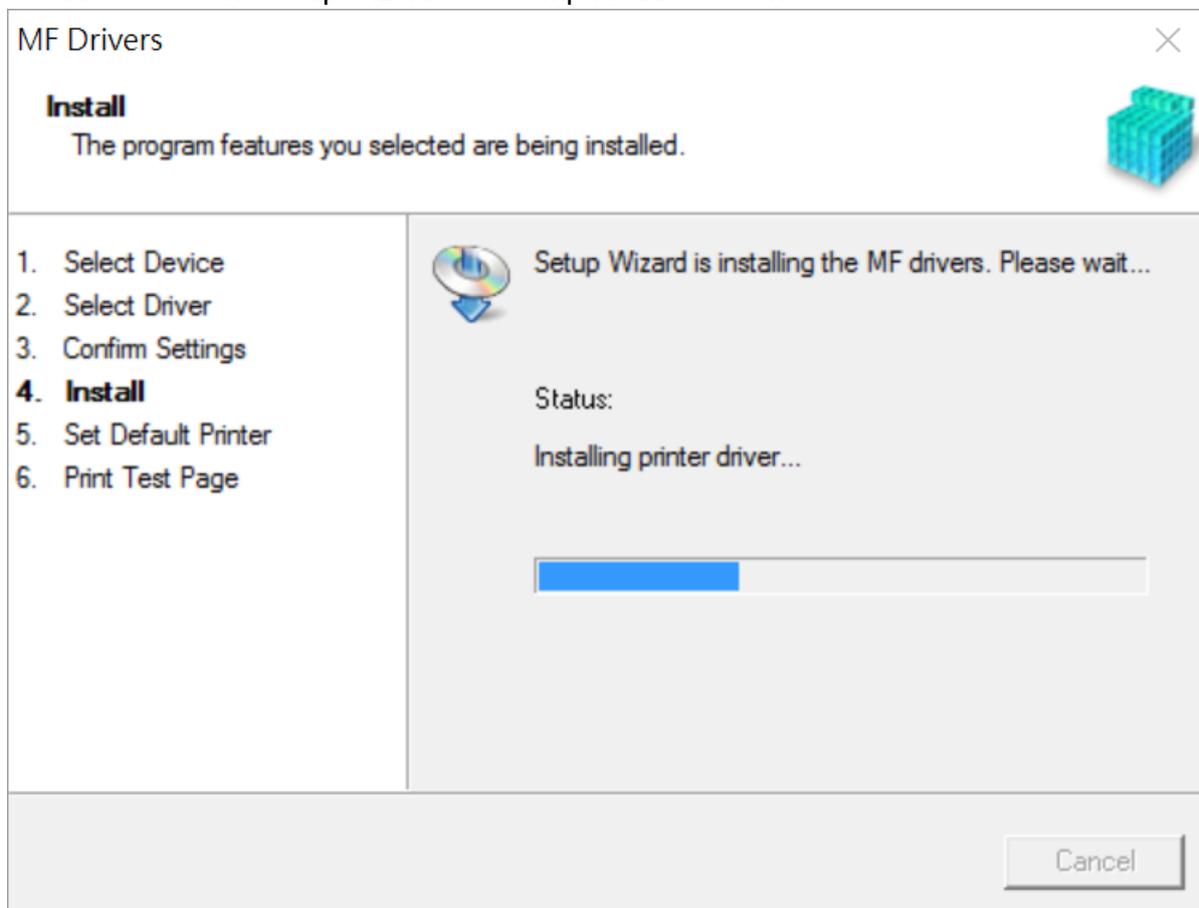

13. 選擇「Installed Printer: Canon MF410 Series UFR II」，按「Next >」
Select “Installed Printer: Canon MF410 Series UFR II”, click “Next >”

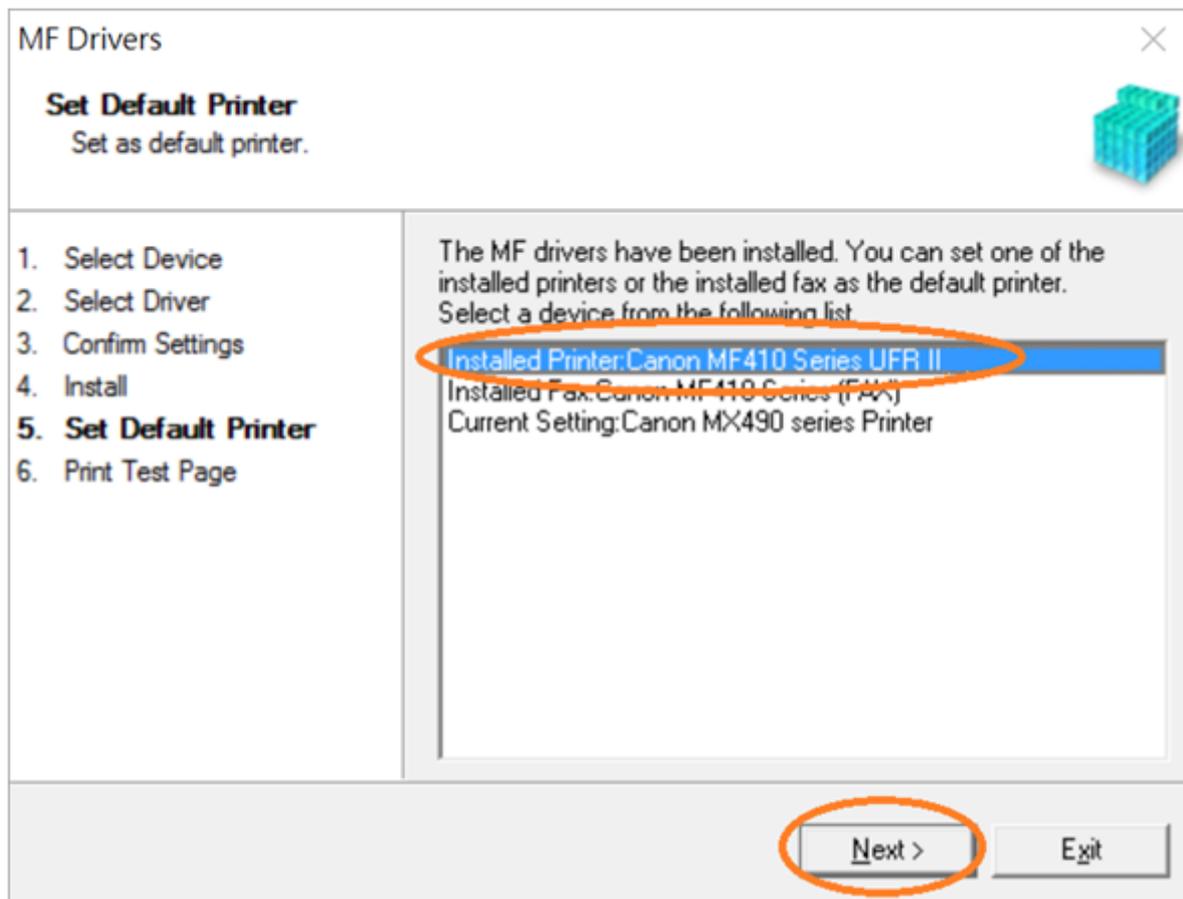


14. 可剔選「Printer: Canon MF 410 Series UFR II」進行列印測試頁，按「Exit」
Can check the box at “Printer: Canon MF 410 Series UFR II” to print a test page, click “Exit”

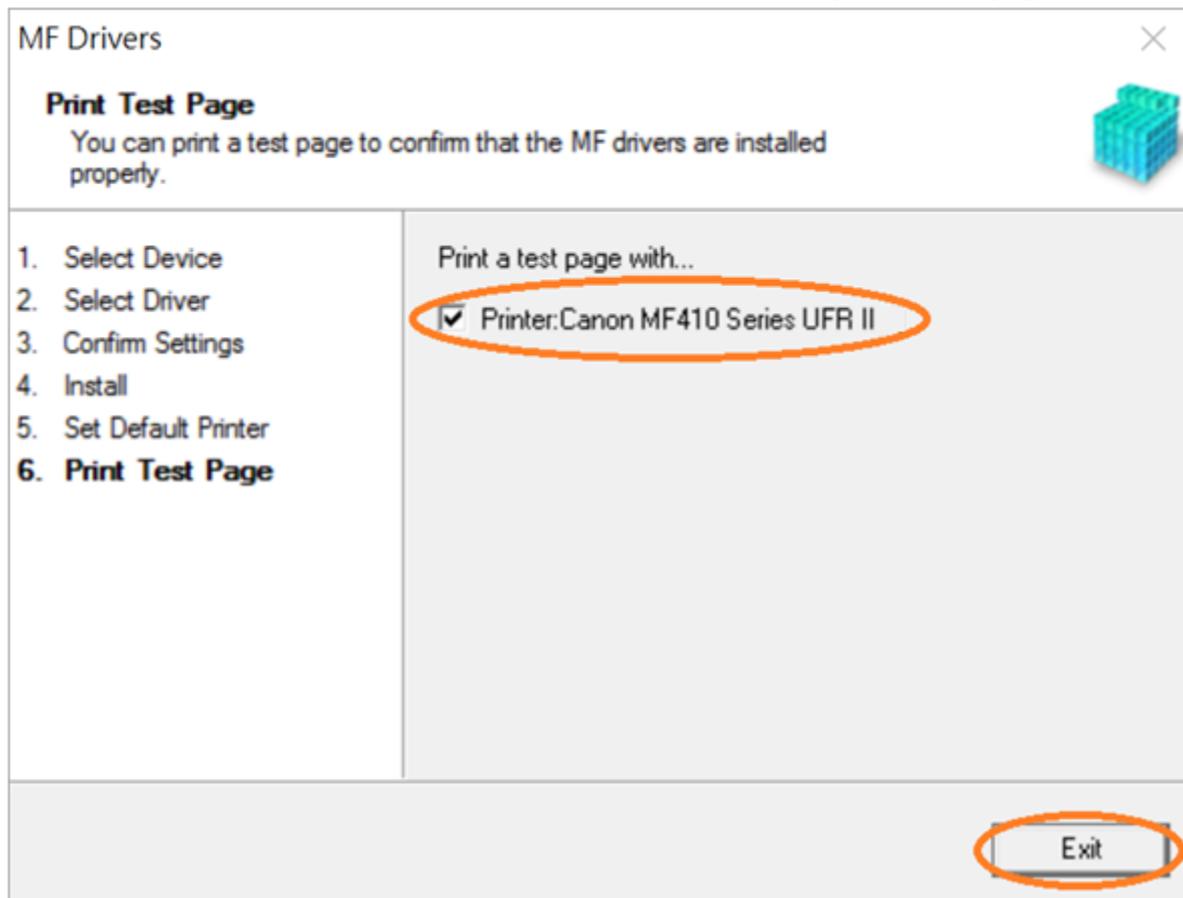


15. 到佳能網站<http://support-hk.canon-asia.com/>，選擇相關的印表機型號及下載掃描軟件 MF Scan Utility
(Go to: <http://support-hk.canon-asia.com/>，select related printer model and download the scanner software MF Scan Utility)

16. 下載完成後，打開掃描軟件安裝檔案
Open scanning software installation file after downloaded


17. 按「Next >」
Click “Next >”

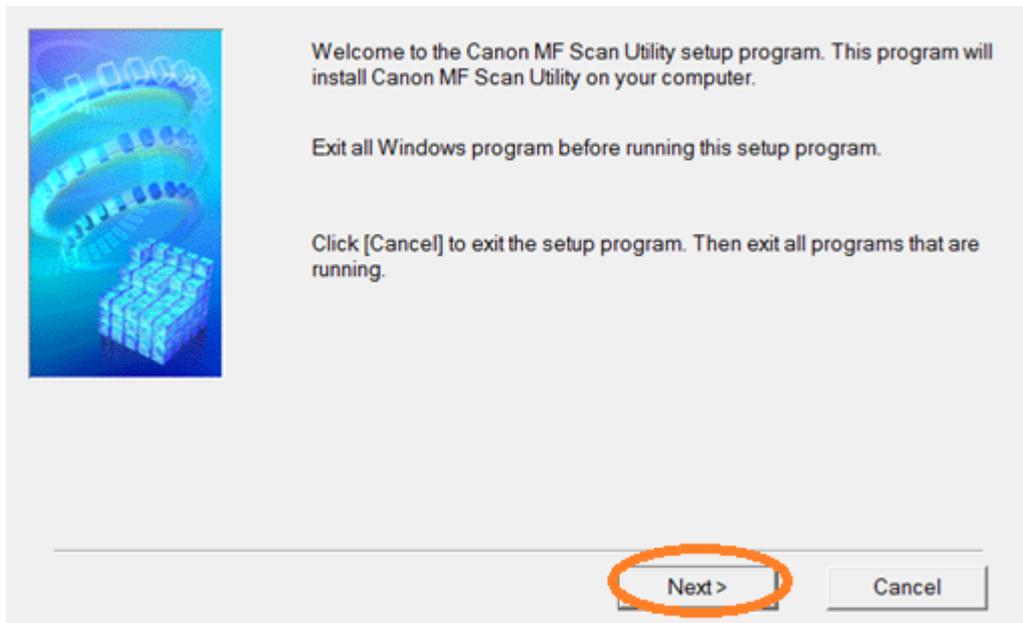

18. 按「Yes」
Click “Yes”

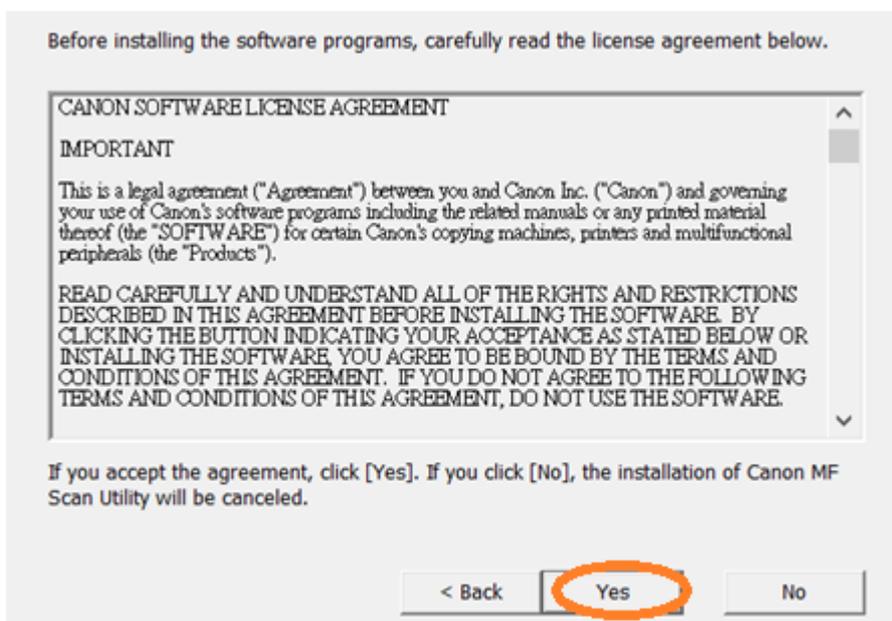

19. 按「Complete」
Click “Complete”

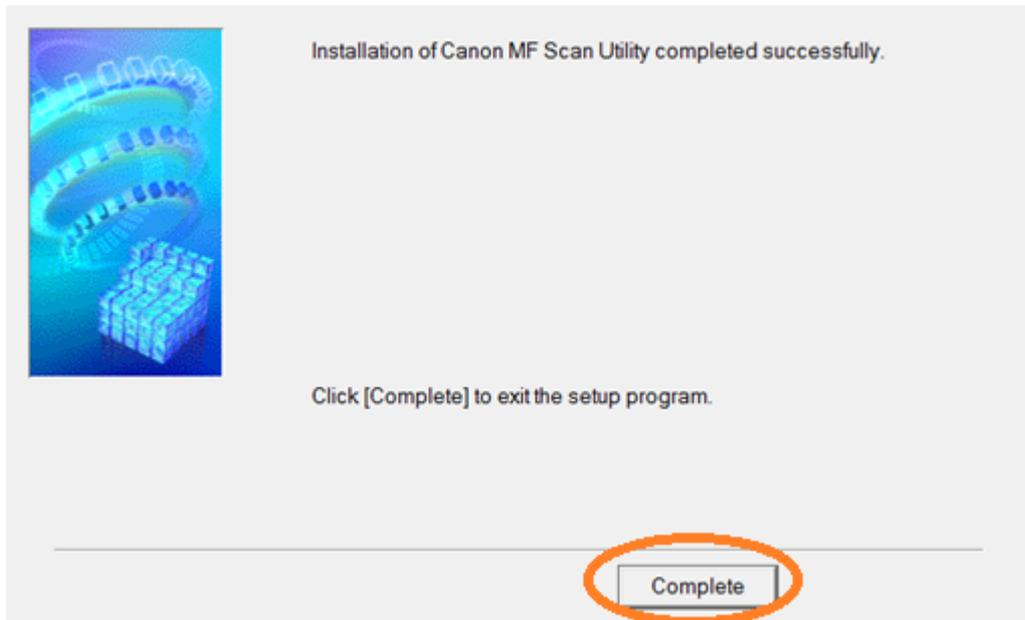

-完-

-End-