


透過乙太網路連接安裝 MF416dw 印表機的驅動程式步驟 (以 Win 10 作示範)
MF416dw printer driver Installation Guide for Windows via LAN connection (Win 10 as example)

使用乙太網路連接線接駁到印表機及開啟印表機

Connect the machine to a router by using a LAN cable and turn on computer

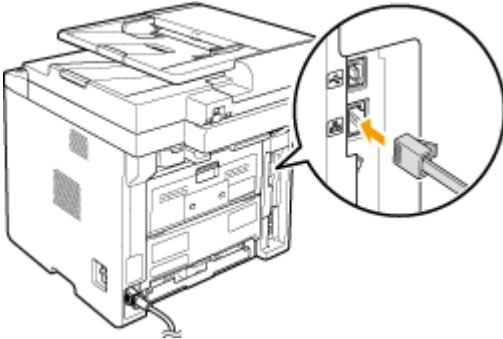

1. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式
Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver




2. 選擇並下載以下檔案
Choose and download below files:
 - 打印機驅動程式 / Printer Driver
[\[Windows xxbit\] imageCLASS MF419dw/MF416dw MFDivers \(UFR II / PCL / PS3 / FAX / ScanGear\)](#)
 - 掃描程式 / Scanner Software
[\[Windows 32bit & 64bit\] MF Scan Utility Ver.1.x.0.0](#)
3. 下載完成後，打開驅動程式 安裝檔案
Open driver installation file after downloaded


4. 按「Next >」
Click "Next >"




5. 按「Yes」
Click "Yes"

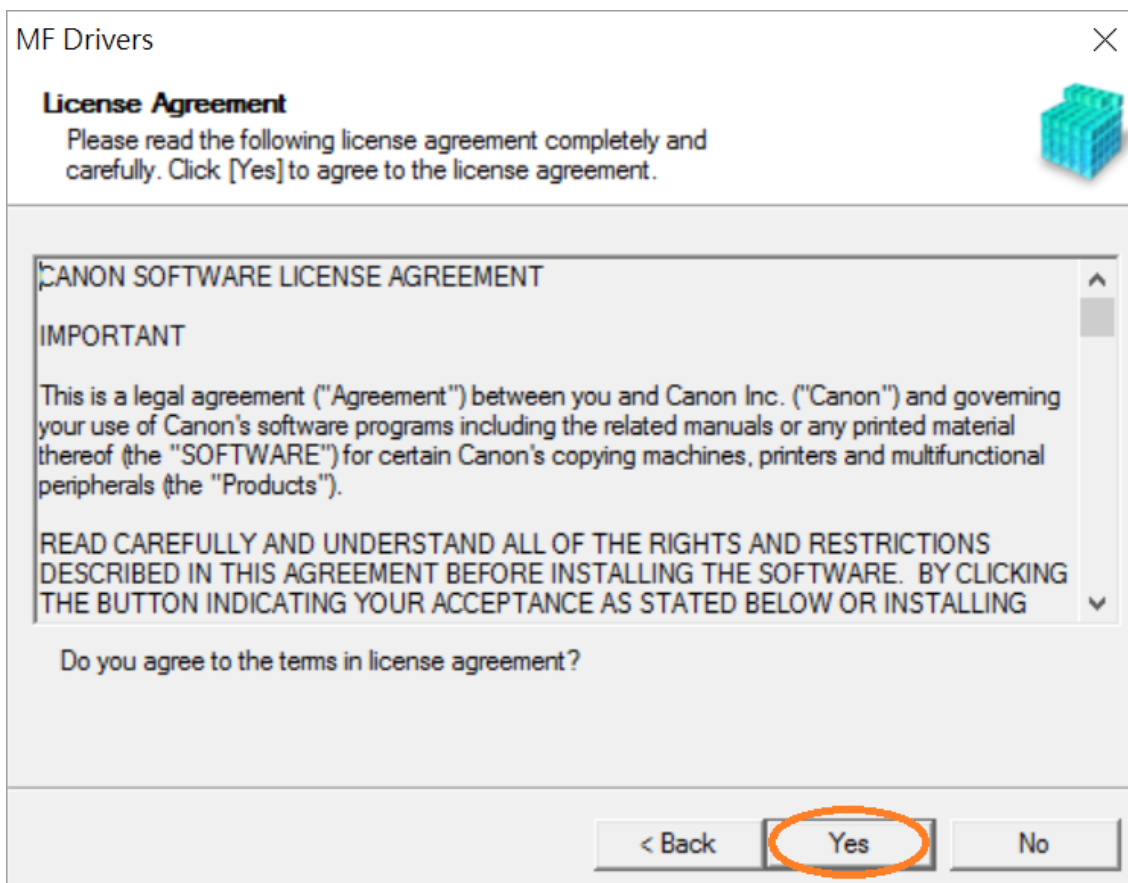


6. 選擇「Network Connection (for Network Models)」，按「Next >」
Select “Network Connection (for Network Models)”, click “Next >”

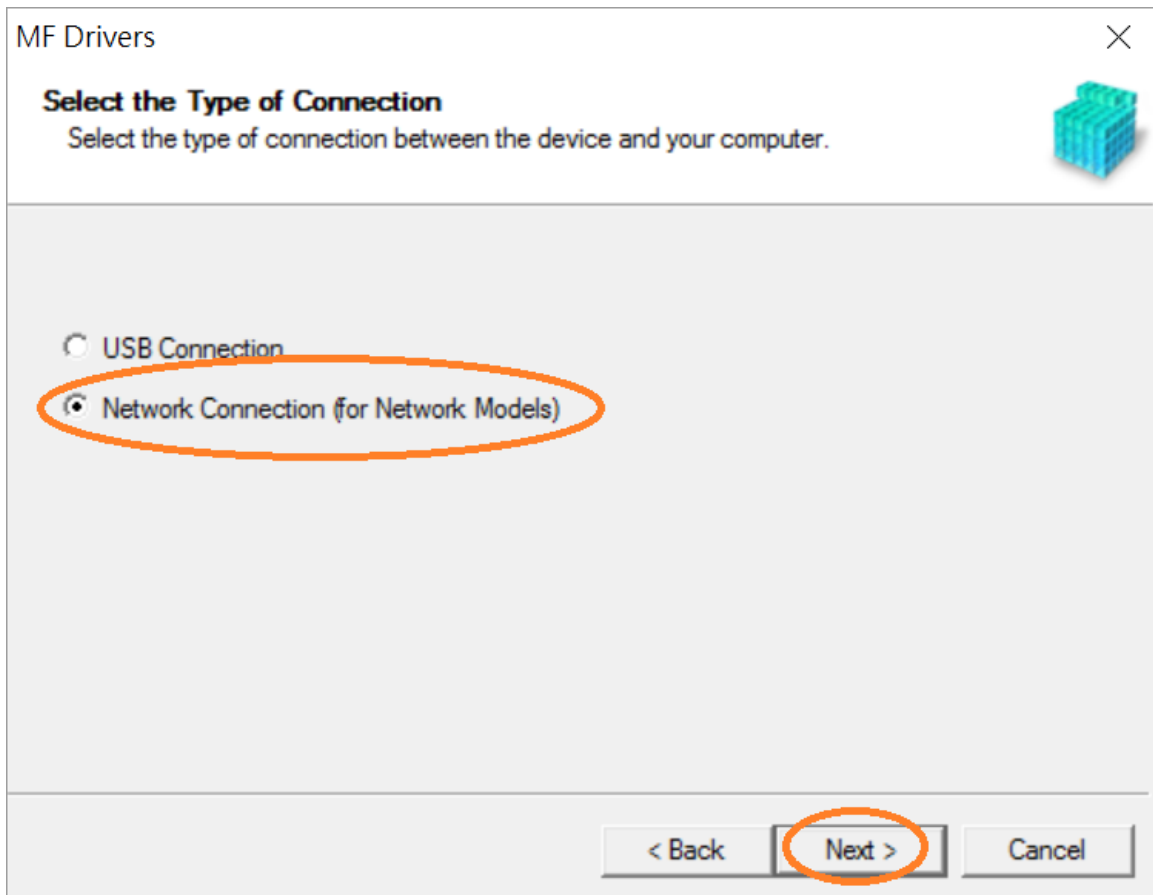

7. 按「是」
Click “Yes”

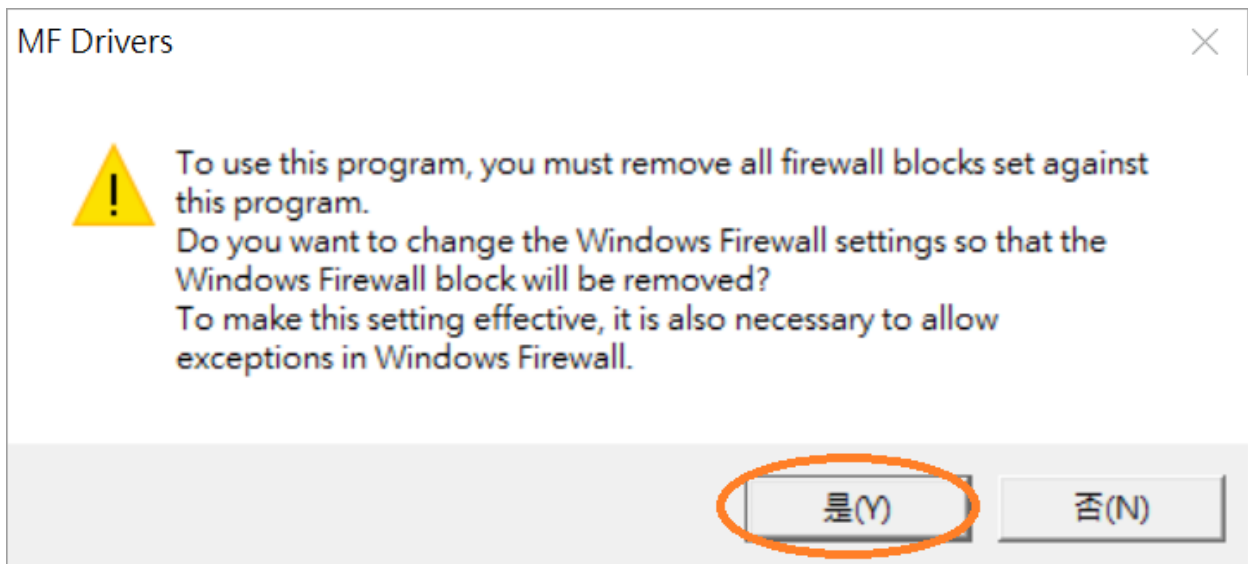

8. 選擇「MF410 Series」，按「Next >」
Select “MF410 Series”, click “Next >”

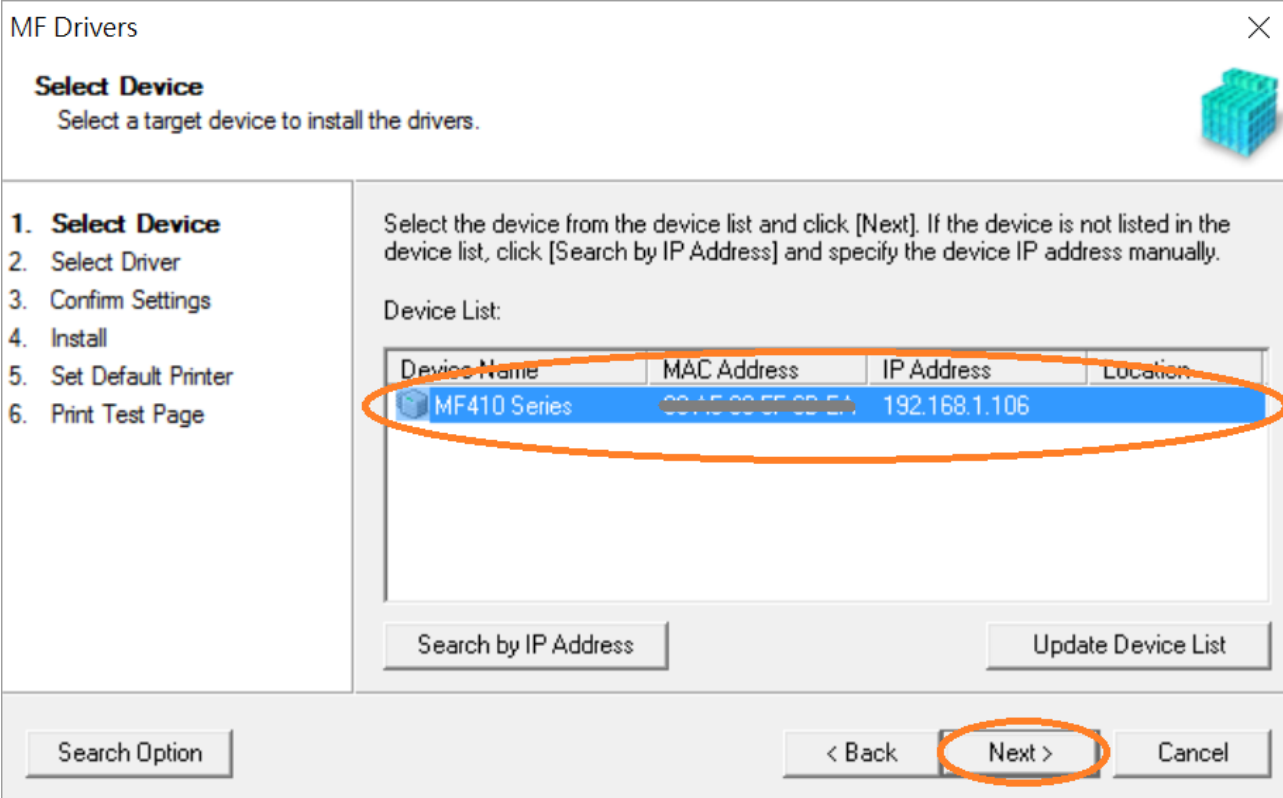

MF Drivers

Select Device
Select a target device to install the drivers.

1. **Select Device**
2. Select Driver
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Select the device from the device list and click [Next]. If the device is not listed in the device list, click [Search by IP Address] and specify the device IP address manually.


Device List:

Device Name	MAC Address	IP Address	Location
MF410 Series	00:15:00:5F:00:5A	192.168.1.106	

Search by IP Address Update Device List

Search Option < Back **Next >** Cancel

9. 確認已剔選「Printer」、「Fax (for Supported Models)」、「Scanner」，按「Next >」
Confirm the “Printer” “Fax (for Supported Models)” “Scanner” box is checked, click “Next >”

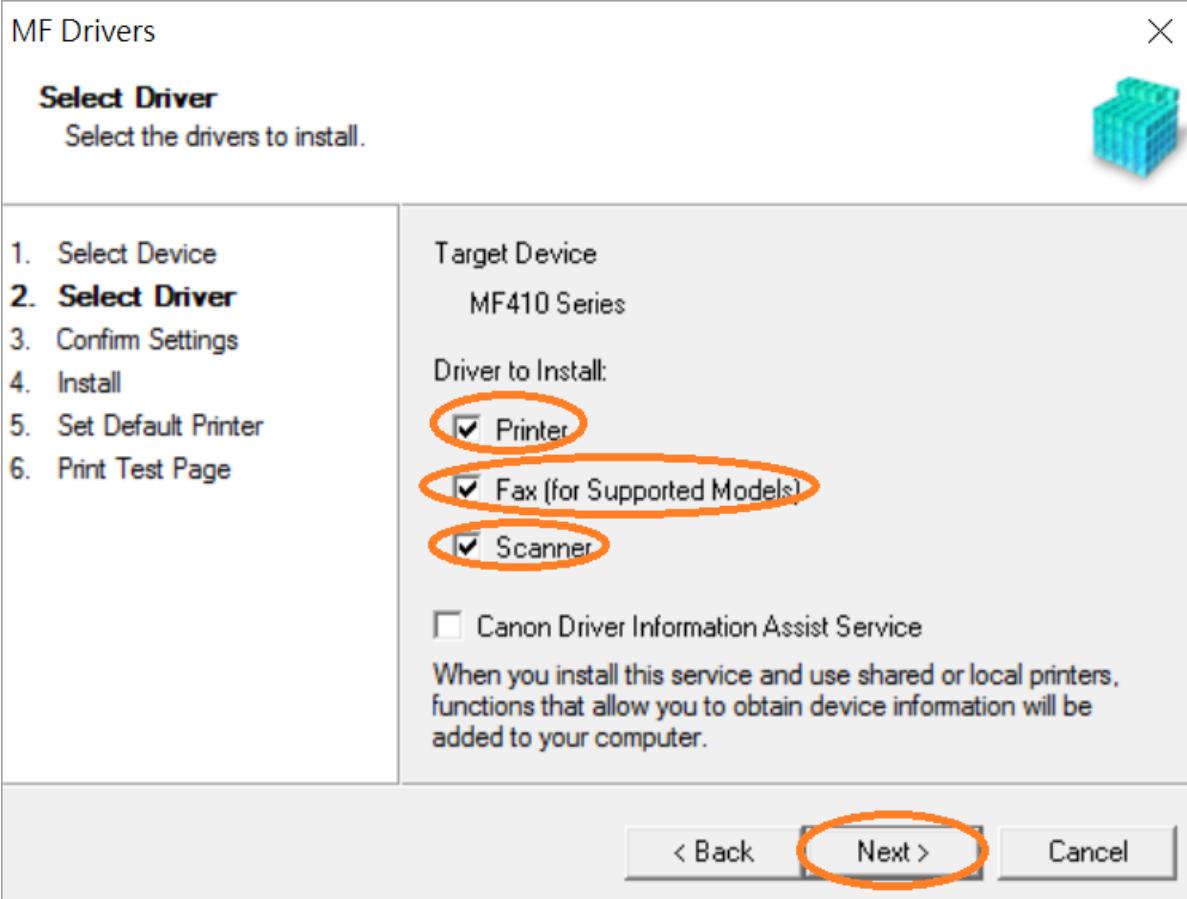

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Target Device
MF410 Series

Driver to Install:

Printer

Fax (for Supported Models)


Scanner

Canon Driver Information Assist Service

When you install this service and use shared or local printers, functions that allow you to obtain device information will be added to your computer.

< Back **Next >** Cancel

10. 選擇「UFR II Printer Driver」，按「Next >」
Select "UFR II Printer Driver", click "Next >"

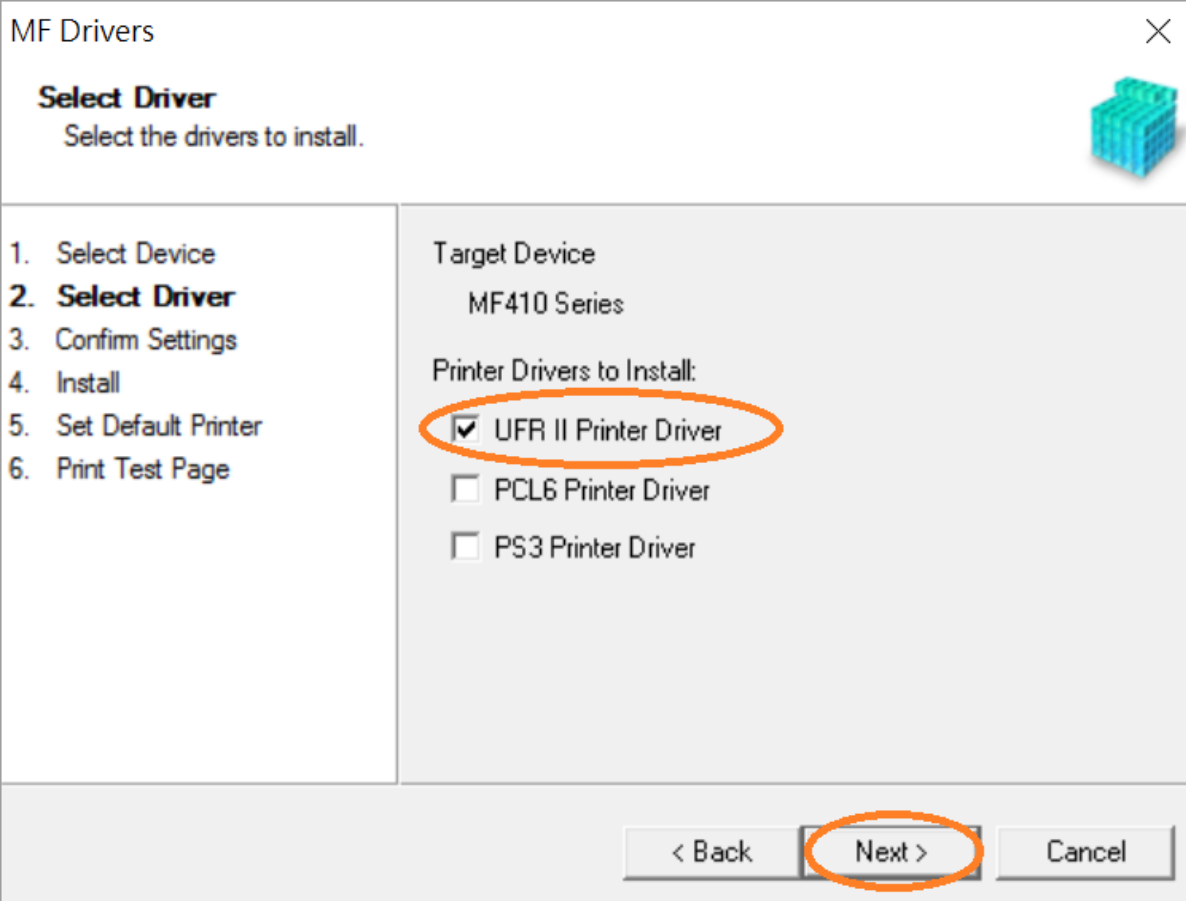

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page


Target Device
MF410 Series

Printer Drivers to Install:

UFR II Printer Driver
 PCL6 Printer Driver
 PS3 Printer Driver

< Back **Next >** Cancel

11. 按「Next >」
Click "Next >"

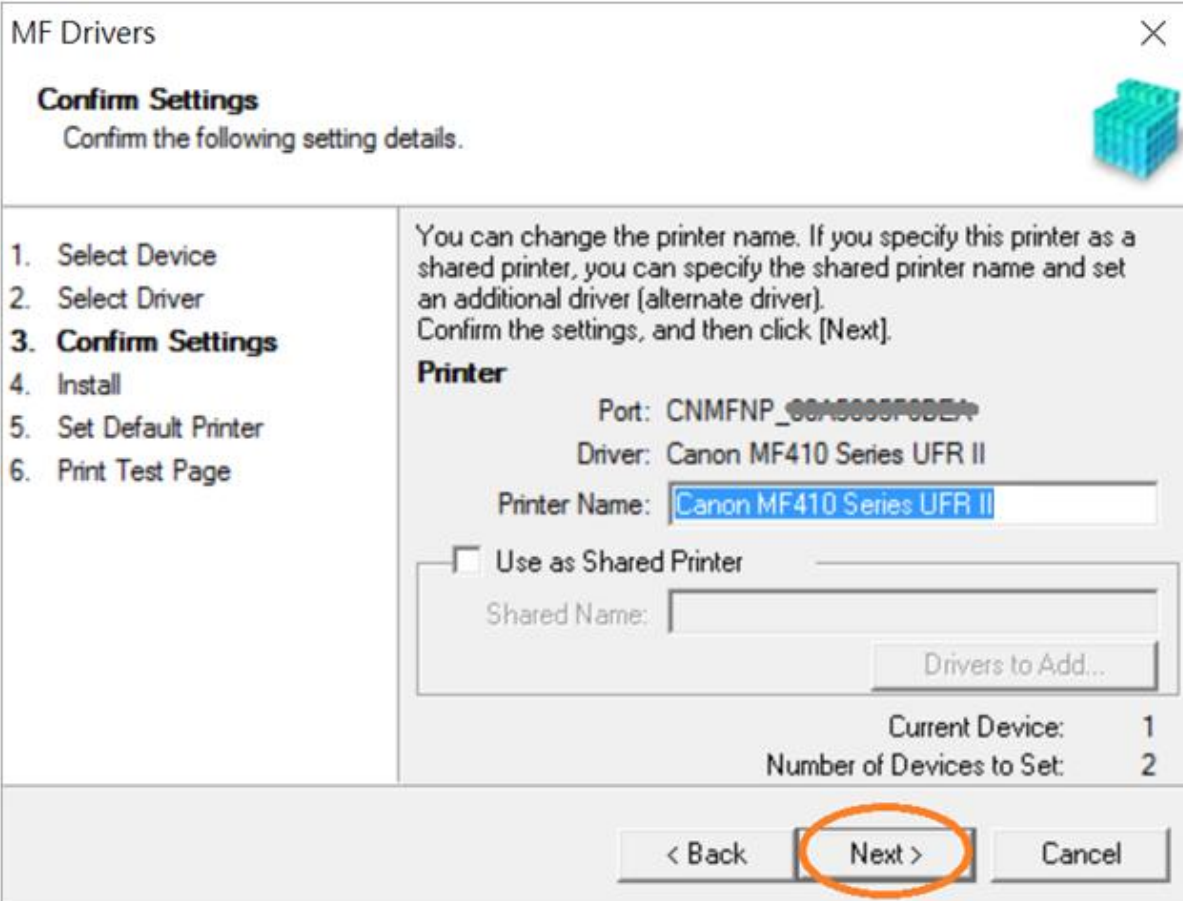

MF Drivers

Confirm Settings
Confirm the following setting details.

1. Select Device
2. Select Driver
3. **Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the printer name. If you specify this printer as a shared printer, you can specify the shared printer name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Printer

Port: CNMFNP_00A0000F0000
Driver: Canon MF410 Series UFR II
Printer Name: Canon MF410 Series UFR II

Use as Shared Printer
Shared Name: _____
Drivers to Add...


Current Device: 1
Number of Devices to Set: 2

< Back **Next >** Cancel

12. 按「Next >」
Click “Next >”

MF Drivers ✕

Confirm Settings
Confirm the following setting details.



1. Select Device
2. Select Driver
3. **Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the fax name. If you specify this fax as a shared fax, you can specify the shared fax name and set an additional driver (alternate driver).
Confirm the settings, and then click [Next].

Fax

Port: CNMFNP_00A5005F00EA
Driver: Canon Generic FAX Driver (FAX)
Fax Name:

Use as Shared Fax


Shared Name:

Current Device: 2
Number of Devices to Set: 2

13. 按「Start」
Click “Start>”

MF Drivers ✕

Confirm Settings
The setup program will install the drivers with the following settings.



1. Select Device
2. Select Driver
3. **Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page


Confirm the settings, then click [Start] to start installing.

Items for Installation:

Port: CNMFNP_00A5005F00EA
Printer: Canon MF410 Series UFR II
Driver: Canon MF410 Series UFR II
Port: CNMFNP_00A5005F00EA
Fax: Canon MF410 Series (FAX)
Driver: Canon Generic FAX Driver (FAX)
Port: CNMFNPSCAN_00A5005F00EA
Scanner: Canon MF410 ser_00A5005F00EA
Driver: Canon MF410 Series


14. 請等待安裝精靈成完安裝

Please wait for the setup wizard to accomplish installation

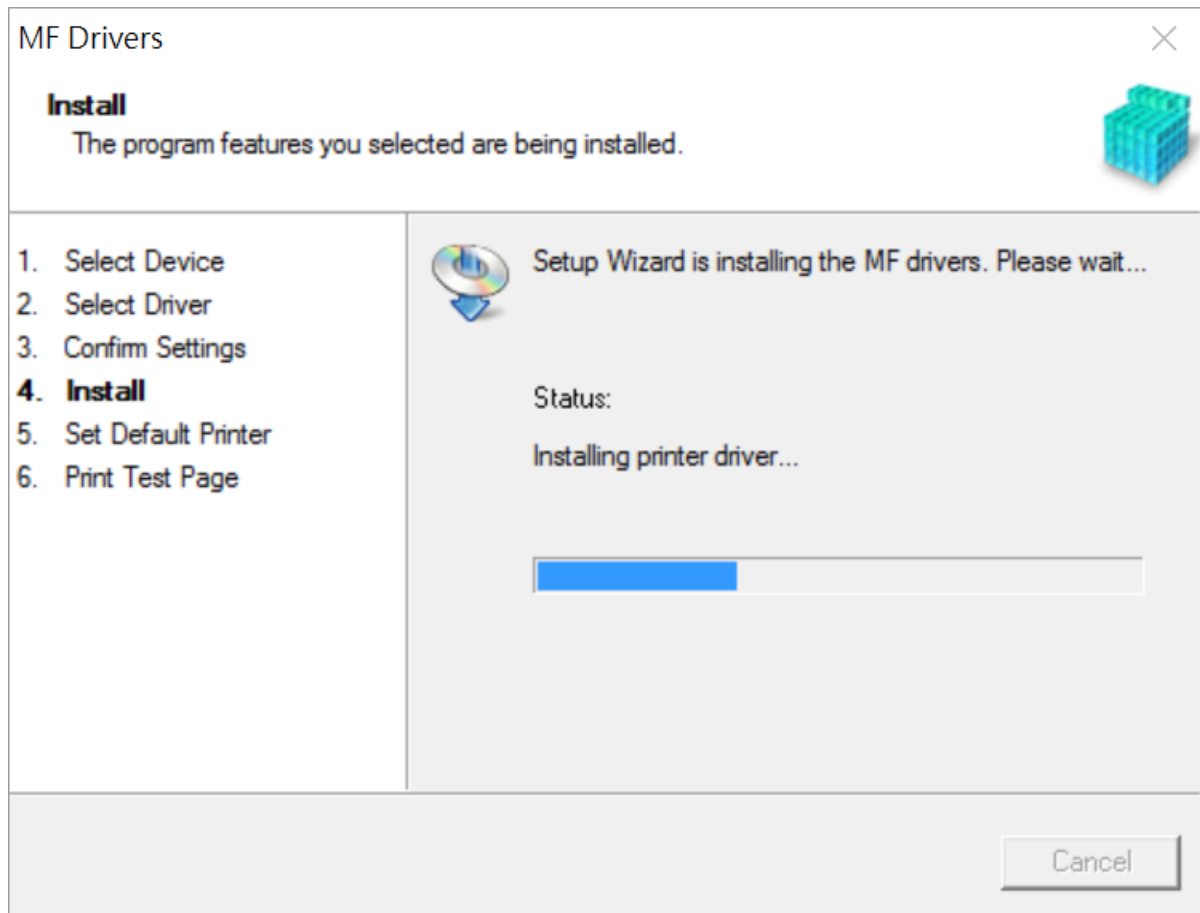


15. 選擇「Installed Printer: Canon MF410 Series UFR II」，按「Next >」

Select "Installed Printer: Canon MF410 Series UFR II", click "Next >"

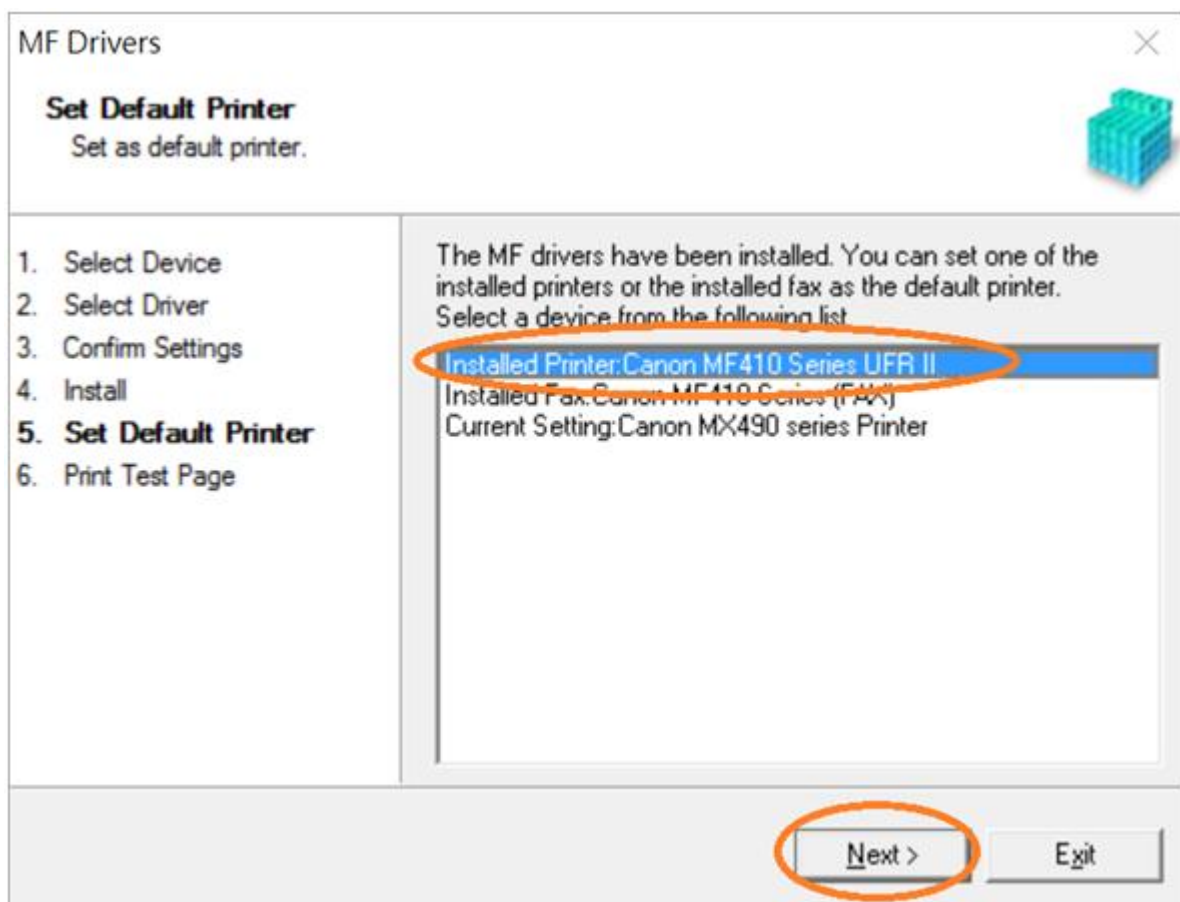


16. 可剔選「Printer: Canon MF 410 Series UFR II」進行列印測試頁，按「Exit」
Can check the box at “Printer: Canon MF 410 Series UFR II” to print a test page, click “Exit”

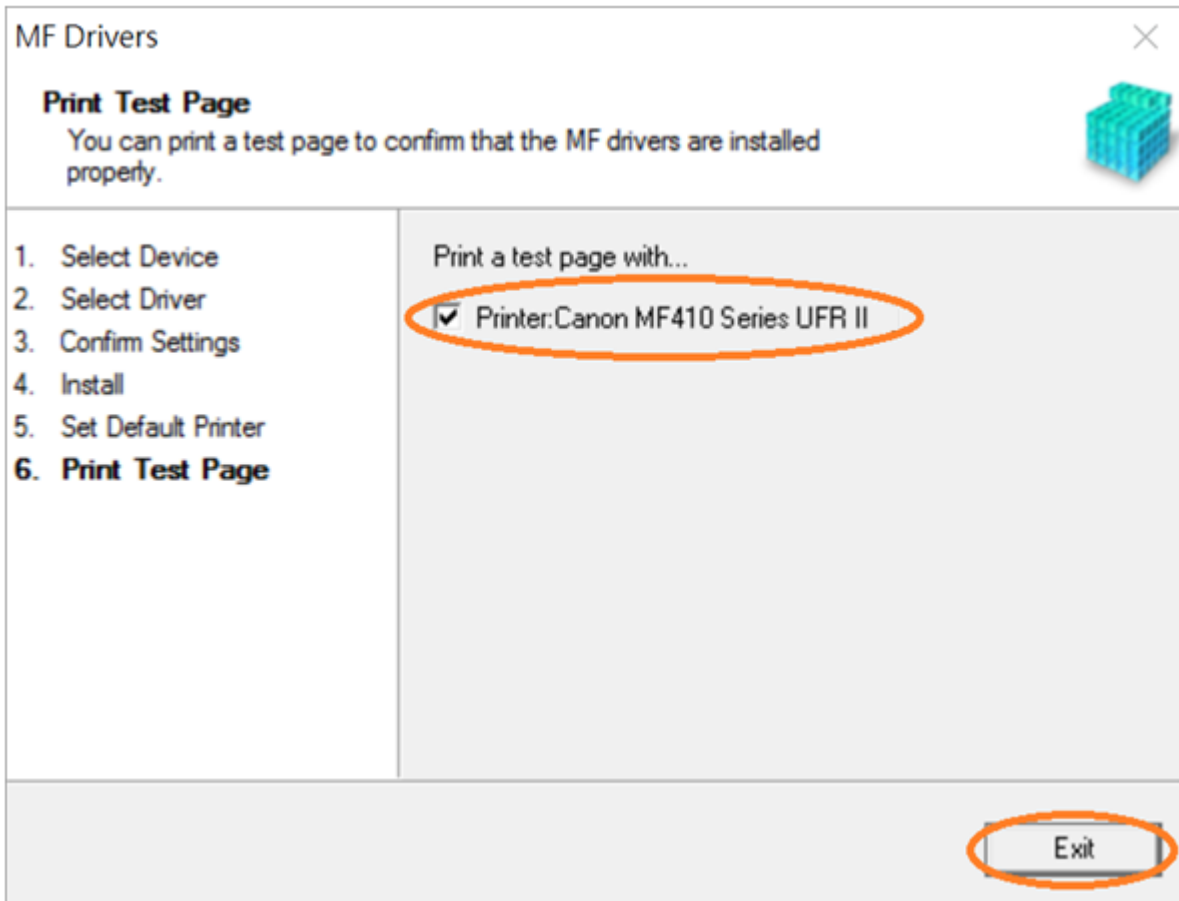


17. 到佳能網站 <http://support-hk.canon-asia.com/>，選擇相關的印表機型號及下載掃瞄軟件 MF Scan Utility (Go to: <http://support-hk.canon-asia.com/> , select related printer model and download the scanner software MF Scan Utility)

18. 下載完成後，打開掃瞄軟件安裝檔案
Open scanning software installation file after downloaded


19. 按「Next >」
Click “Next >”

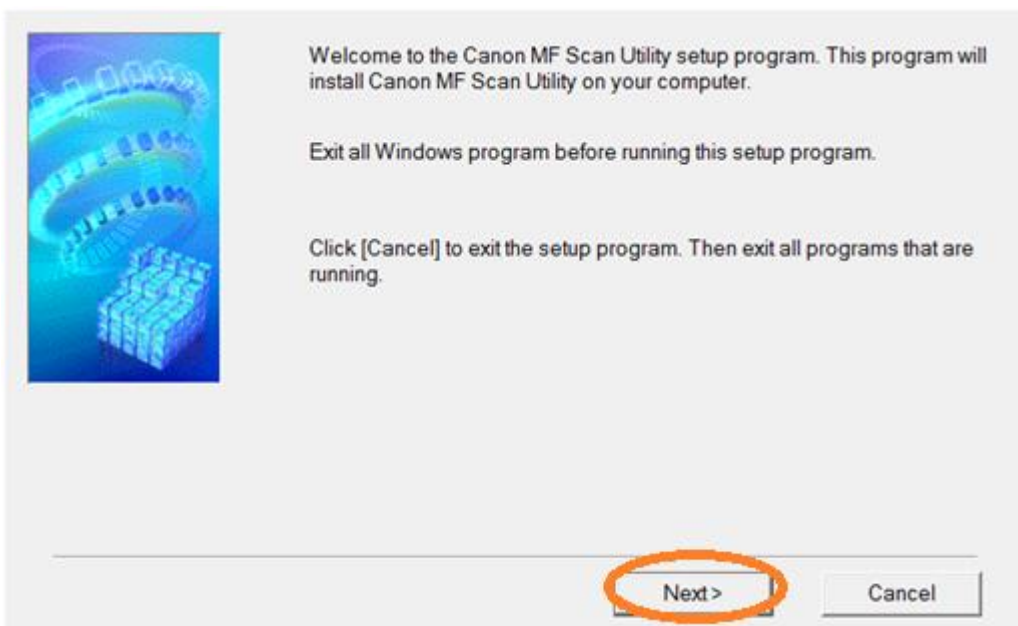

20. 按「Yes」
Click “Yes”

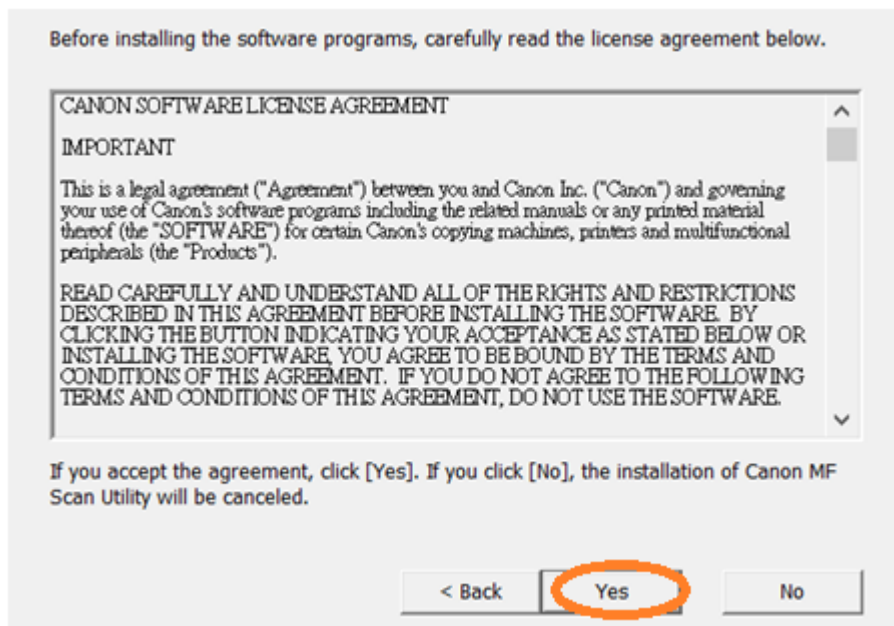

21. 按「Complete」
Click “Complete”

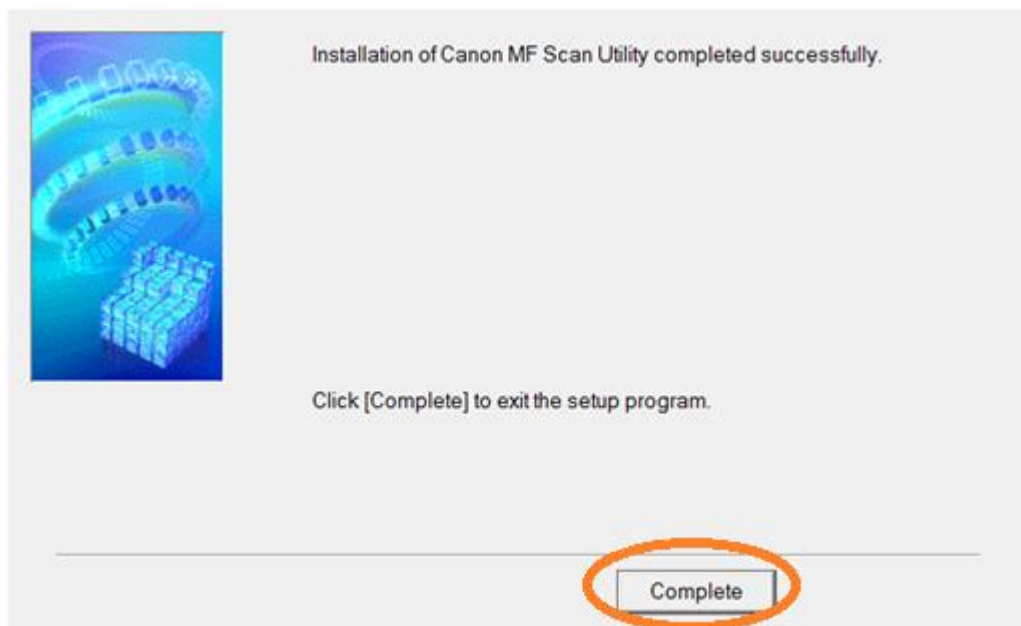

-完-
-End-