


**在 MAC OSX 以 LAN 接駁安裝 MF416dw 驅動程式步驟 (以 OSX 10.11 作示範)**  
**MF416dw printer driver Installation Guide for MAC OSX via LAN (OSX 10.11 as example)**


1. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式  
Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver




2. 選擇並下載以下檔案  
Choose and download below files:
  - 打印機驅動程式 / Printer Driver  
**MF Printer Driver & Utilities for Macintosh V10.11.1 [Mac OS : 10.8/10.9/10.10/10.11/10.12/10.13/10.14]**
  - 掃描程式 / Scanner Software  
**Scanner Driver & Utilities for Macintosh V2.15.0 [Mac OS : 10.9/10.10/10.11/10.12/10.13/10.14]**
3. 開啟下載檔案「UFR II LT Printer Driver」，進入「SFP」文件夾  
Open "UFR II LT Printer Driver", and then open "SFP"

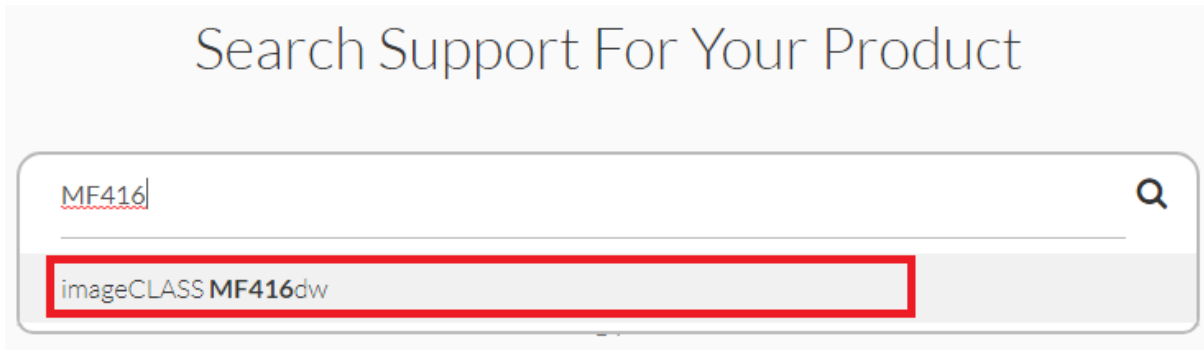


4. 開啓“UFR1I\_LT\_\*\*\*.pkg”文件開始安裝設定  
Open “UFR1I\_LT\_\*\*\*.pkg” to start the driver installation

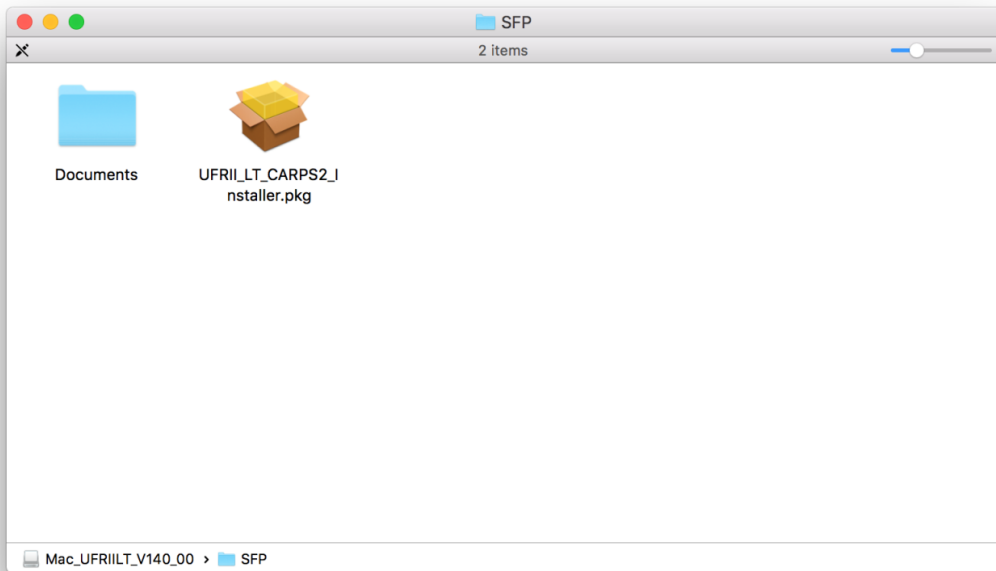


5. 按「Continue」  
Click “Continue”

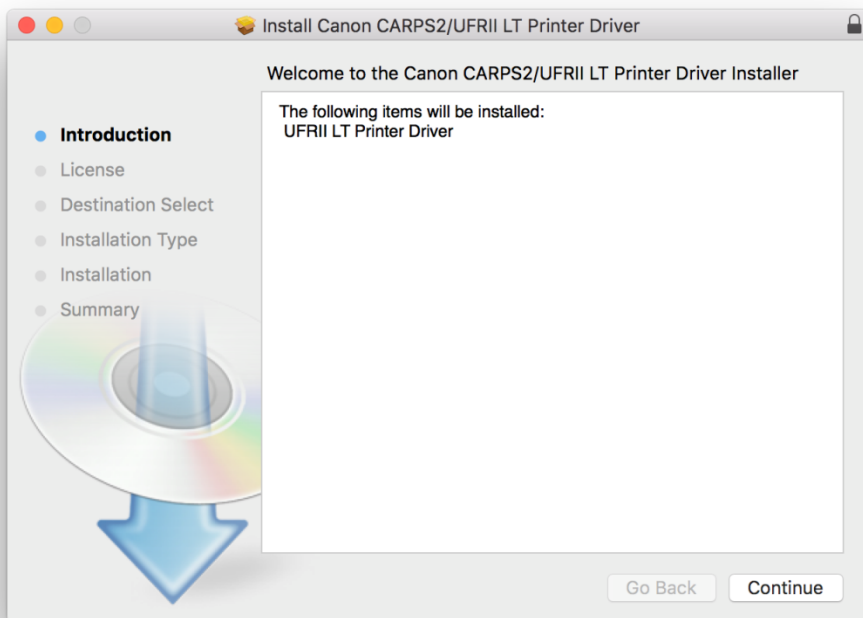


6. 按「Continue」  
Click “Continue”

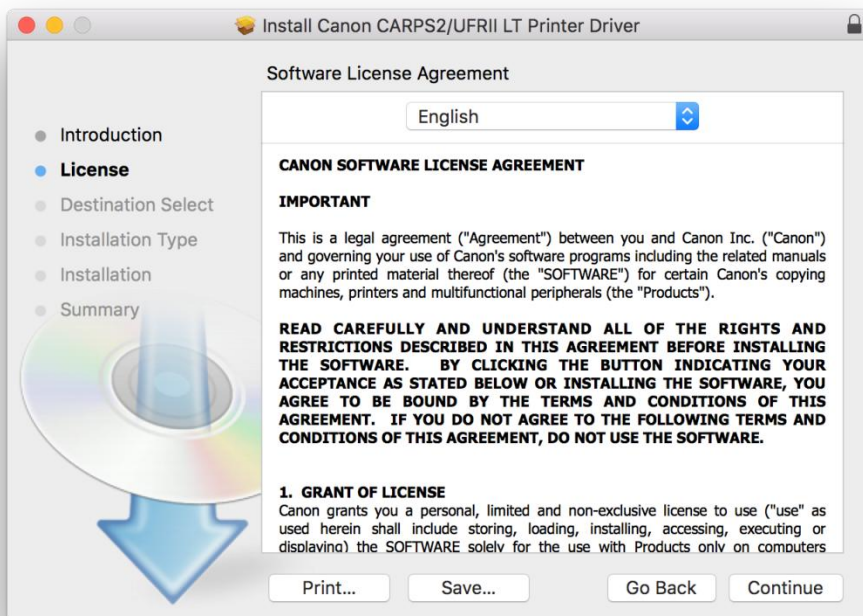


7. 按「Agree」  
Click “Agree”

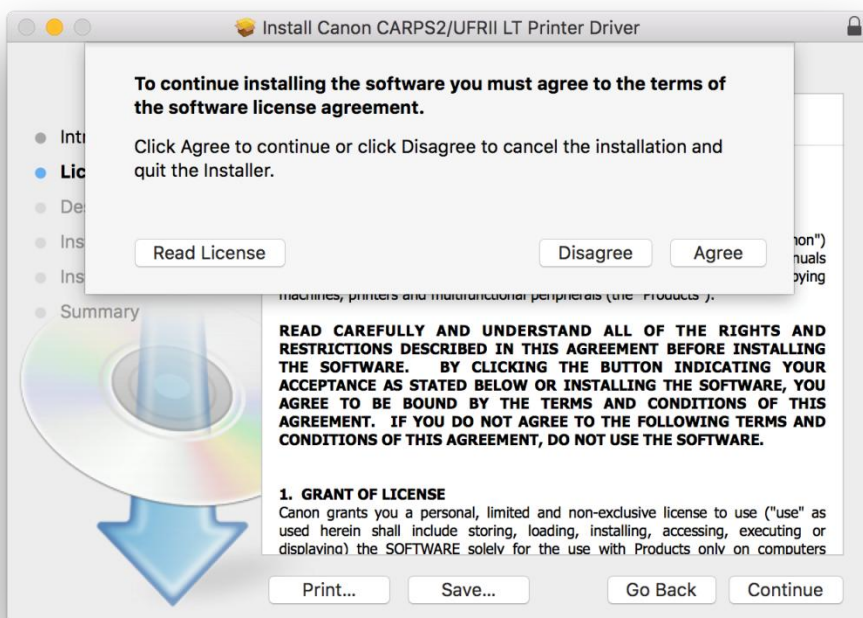


8. 按「Install」  
Click "Install"

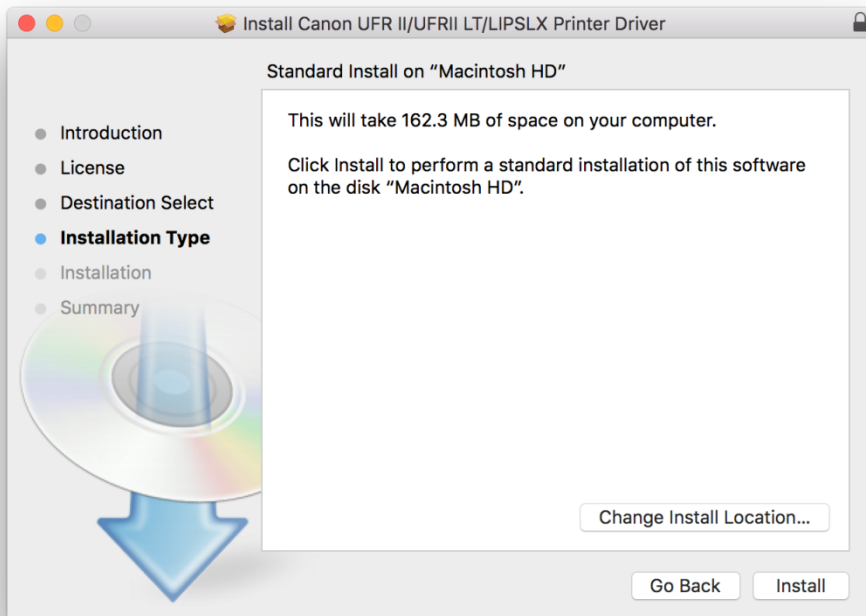

9. 請輸入登入名稱及密碼（如出現以下畫面）  
Please enter the login username and password (If this screen is shown below)

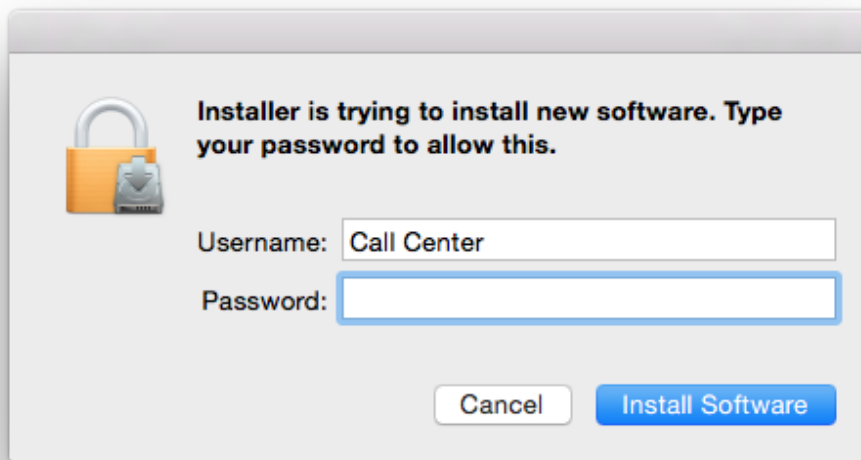


- 按「Close」  
Click “Close”

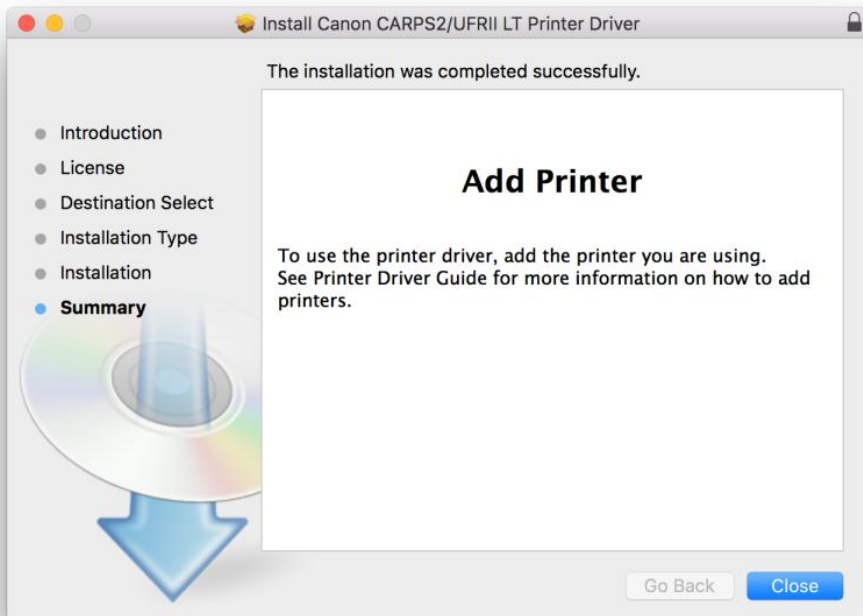


**\*\*完成安裝驅動程式後，請於印表機上設定連接到網絡**

**\*\*After finished the driver installation, please connect the printer to a wireless network**

- 將本機透過路由器連接到電腦。使用區域網路纜線將本機連接到路由器  
Connect the machine to a computer via a router. Use a LAN cable to connect the machine to the router

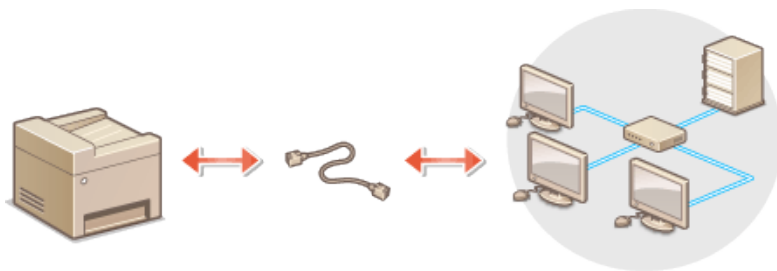

- 使用區域網路纜線將本機連接到路由器，推入接頭，直至聽到喀嗒聲，然後開啟印表機  
Connect the machine to a router by using a LAN cable, push the connector in until it clicks into place and then turn on the printer

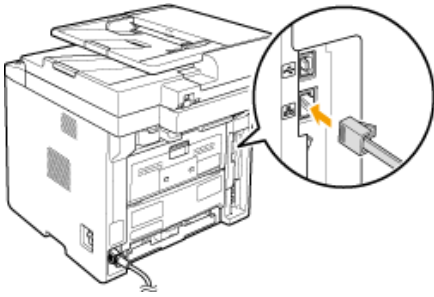

等待約 2 分鐘，等待時，會自動設定 IP 位址

Wait approximately 2 minutes, while you wait, the IP address is set automatically

13. 在主畫面中點選「功能表」

Tap "Menu" in the Home screen

14. 點選「網路設定」

Tap "Network Settings"



15. 點選「選擇有線/無線區域網路」


Tap "Select Wired/Wireless LAN"

16. 點選「有線區域網路」


Tap "Wired LAN"




17. 完成印表機上的網絡設後，按一下電腦左上角「」圖案，選擇「系統偏好設定」，再選擇「印表機和掃描器」  
After finished the network setup in the printer, please click the top left corner of the computer 「」 icon, click 「System Preferences」, and then click 「Printers and Scanners」

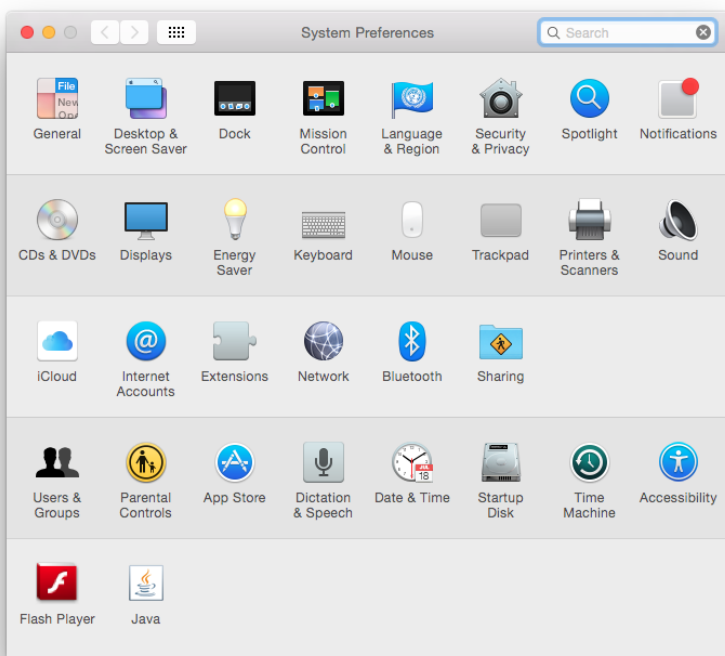

18. 於〔列印和掃描器 (Printers & Scanners)〕視窗，按一下「+」按鈕加入印表機  
In the [Printers & Scanners] window, click the "+" button to register the printer

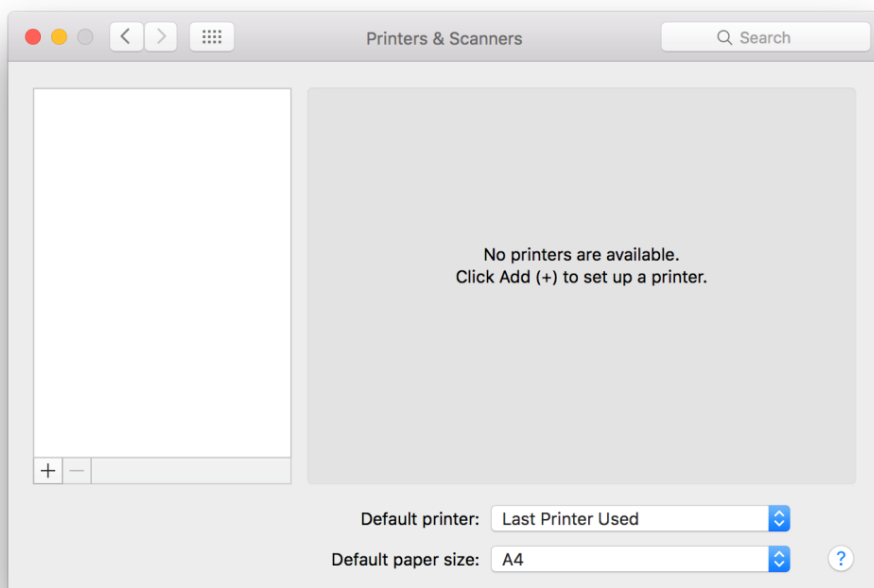


19. 名稱選擇「Canon MF410 Series」，種類「Bonjour Multifunction」，確認「使用（Use）」為「Canon MF410 Series」，然後按「加入（Add）」  
Choose “Name” as “Canon MF410 Series”, confirm “Kind” as “Bonjour Multifunction” and “Use” is “Canon MF410 Series”, and then click “Add”

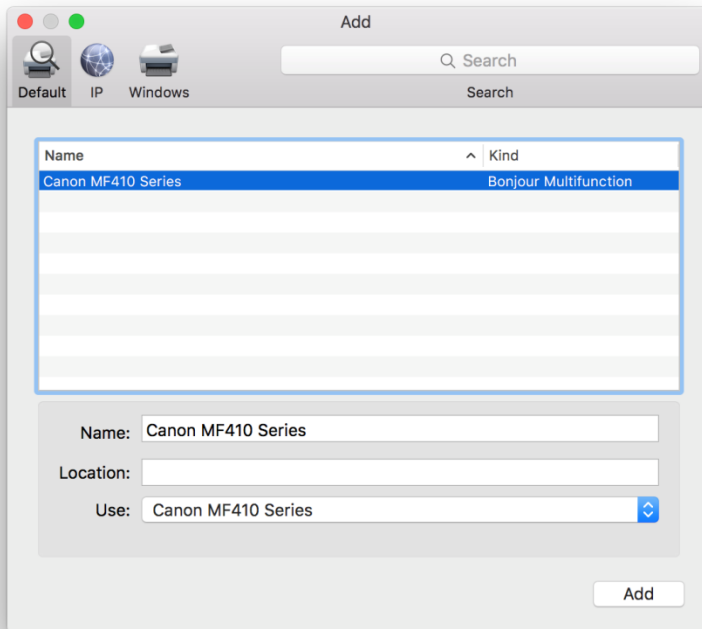

\*\*\* 如「使用（Use）」不是「Canon MF410 Series」，請按以下步驟設定\*\*\*


\*\*\* If “Use” is not “Canon MF410 Series”, please refer to the steps below\*\*\*

- a) 請如下圖打開「使用（Use）」的選單，選擇” Select Software”  
Please open “Use”, and then choose “Select Software”

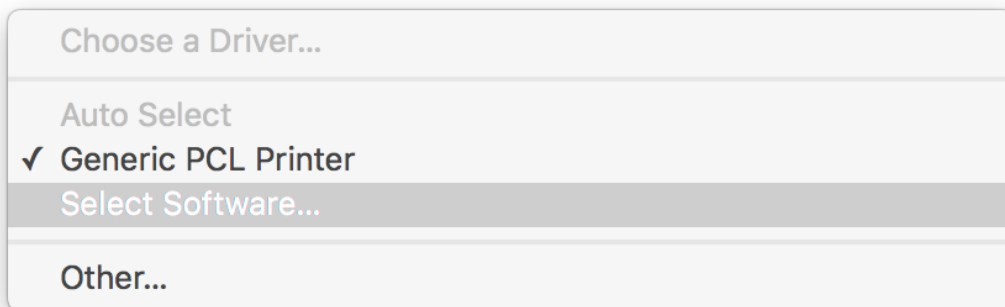




- b) 輸入 MF410 以搜尋「Canon MF410 Series」  
Enter MF410 and then choose “Canon MF410 Series”

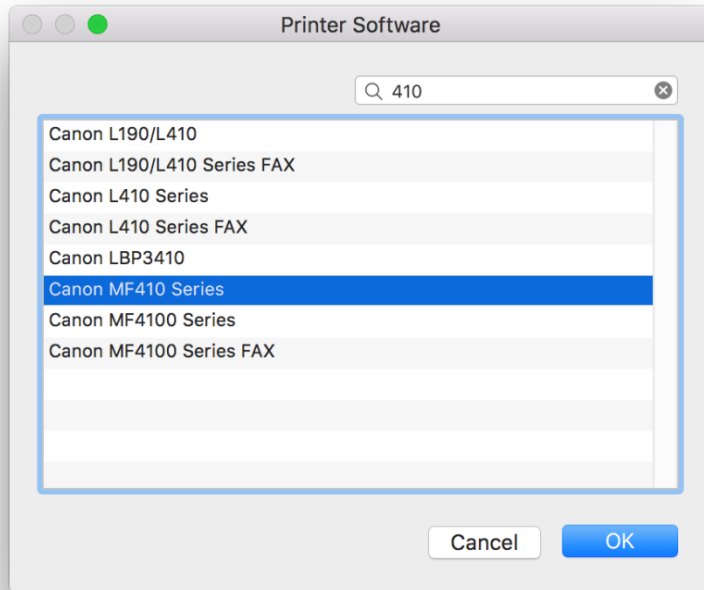

20. 新增印表機完成，驅動程式安裝完畢  
After the printer is added, driver installation is completed

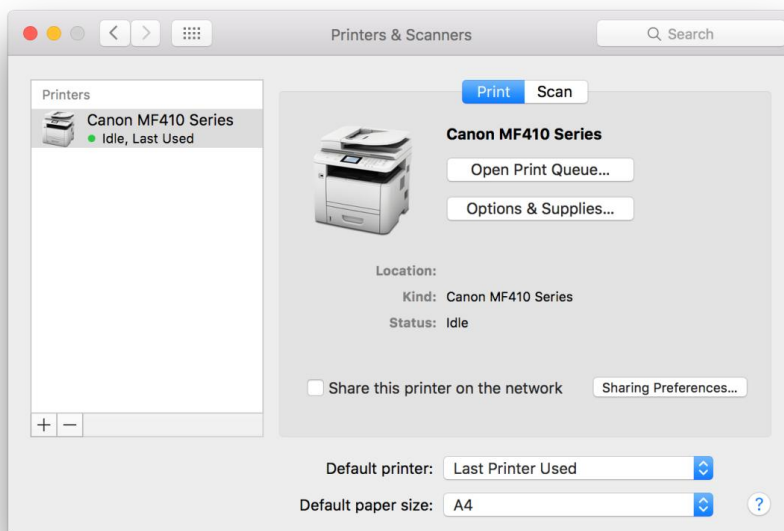

<完>  
<END>