



透過無線網路連接安裝 MF249dw 印表機的驅動程式步驟 (以 Win 10 作示範)

MF249dw printer driver Installation Guide for Windows via Wi-Fi connection (Win 10 as example)

1. 開啟印表機，於印表機主畫面上點選「功能表」
Turn on printer, tap “Menu” on printer home screen

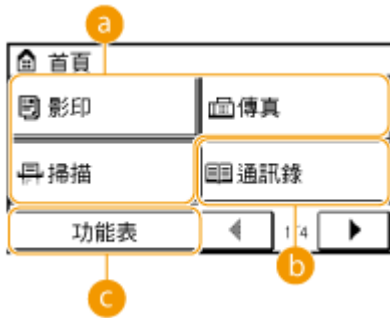

2. 點選「網路設定」
Tap “Network Settings”

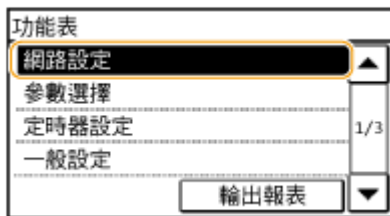

3. 點選「無線區域網路設定」(如顯示「是否啟用無線區域網路?」，點選「是」)
Tap “Wireless LAN Settings” (If the “Do you want to enable the wireless LAN?” message is displayed, tap “Yes”)



4. 閱讀顯示的訊息，點選「確定」
Read the message that is displayed, tap “OK”

5. 點選「SSID 設定」
Tap “SSID Settings”




6. 點選「選擇存取點」

Tap "Select Access Point"





7. 選擇無線網路名稱

Select a wireless network name

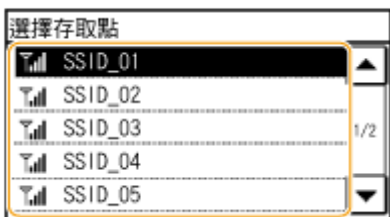



8. 使用數字鍵輸入 Wi-Fi 密碼，點選「套用」

Enter the Wi-Fi password using the numeric keys, tap "Apply"

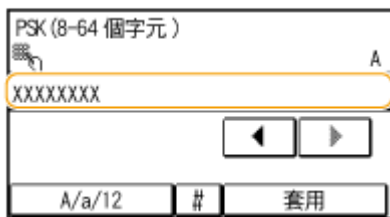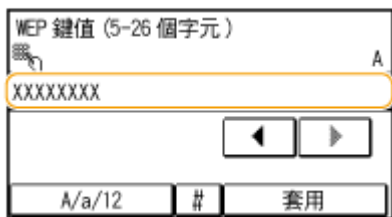

9. 點選「是」

Tap "Yes"

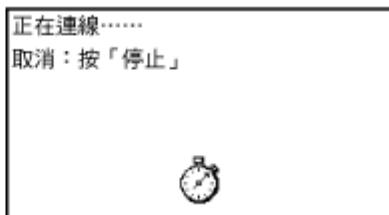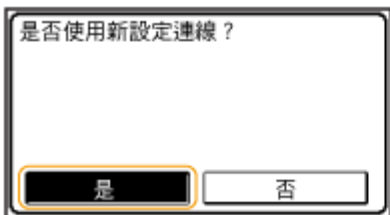


10. 檢查控制面板上的 Wi-Fi 指示燈是否閃爍

當偵測到無線網路，Wi-Fi 指示燈會閃爍

Check that the Wi-Fi indicator is blinking on the operation panel

The Wi-Fi indicator blinks when a wireless network is detected

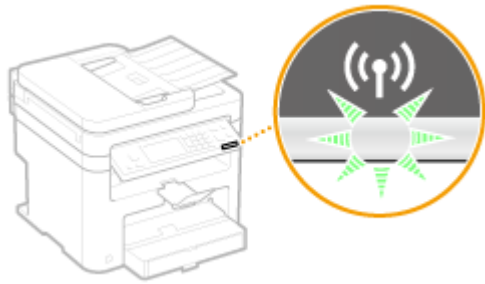

當設定完成，會顯示以下畫面，約 2 秒後 Wi-Fi 指示燈會亮起

When the setup is completed, the screen below is displayed, and approximately 2 seconds later, the Wi-Fi indicator lights up




到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF249dw/model>，選擇及下載印表機的驅動程式 MFDivers (UFR II / PCL / FAX / ScanGear)


(Go to <https://hk.canon/en/support/imageCLASS%20MF249dw/model>, select and download the printer driver MFDivers (UFR II / PCL / FAX / ScanGear))

11. 下載完成後，打開驅動程式 安裝檔案
Open driver installation file after downloaded


12. 按「Next >」
Click "Next >"

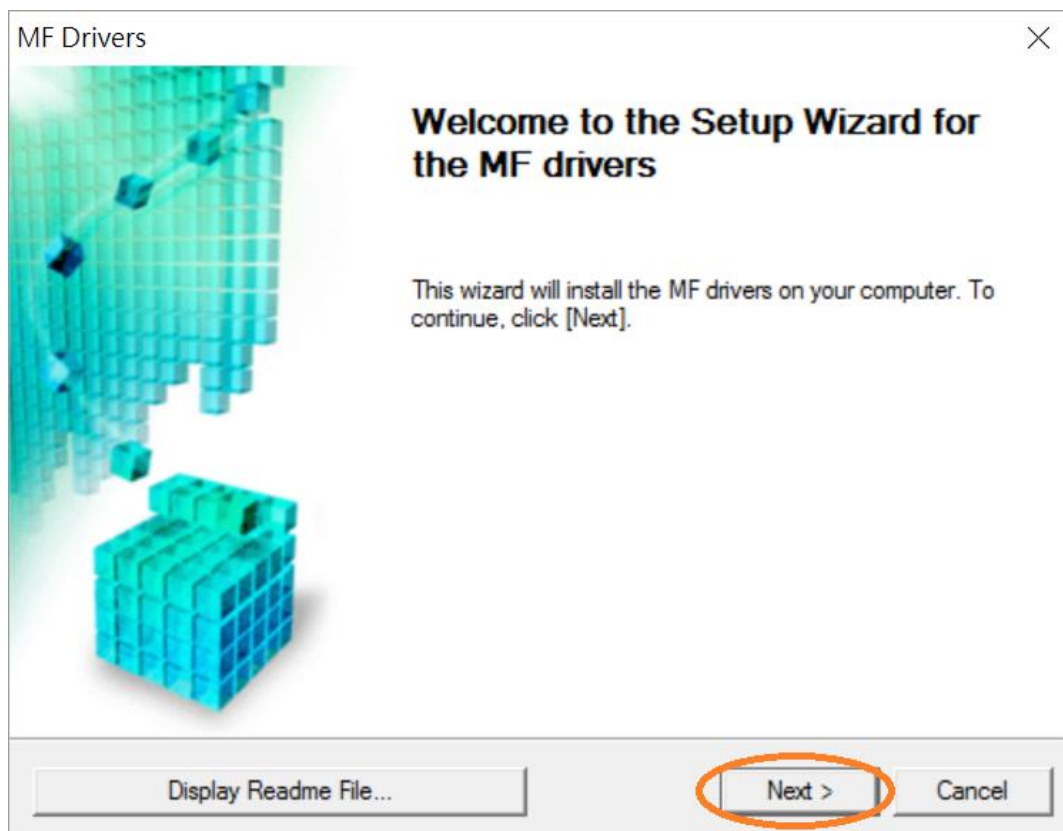


13. 按「Yes」
Click "Yes"

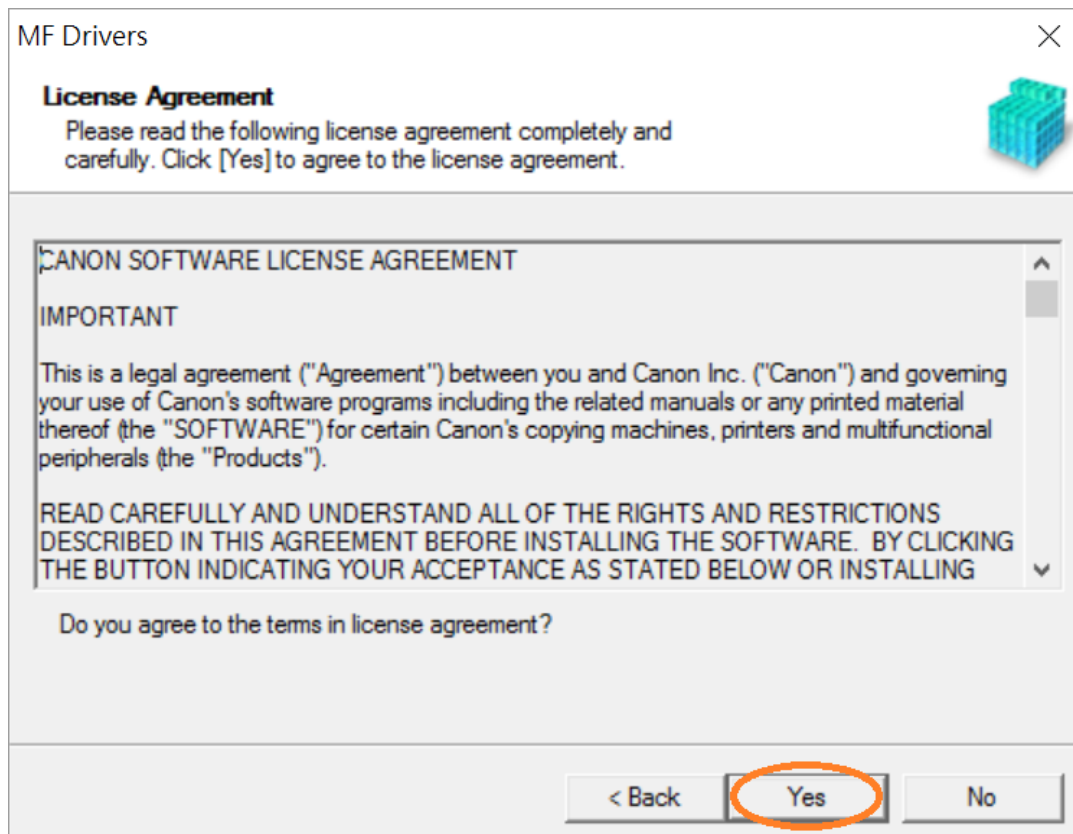

14. 選擇「Network Connection (for Network Models)」，按「Next >」
Select “Network Connection (for Network Models)”, click “Next >”

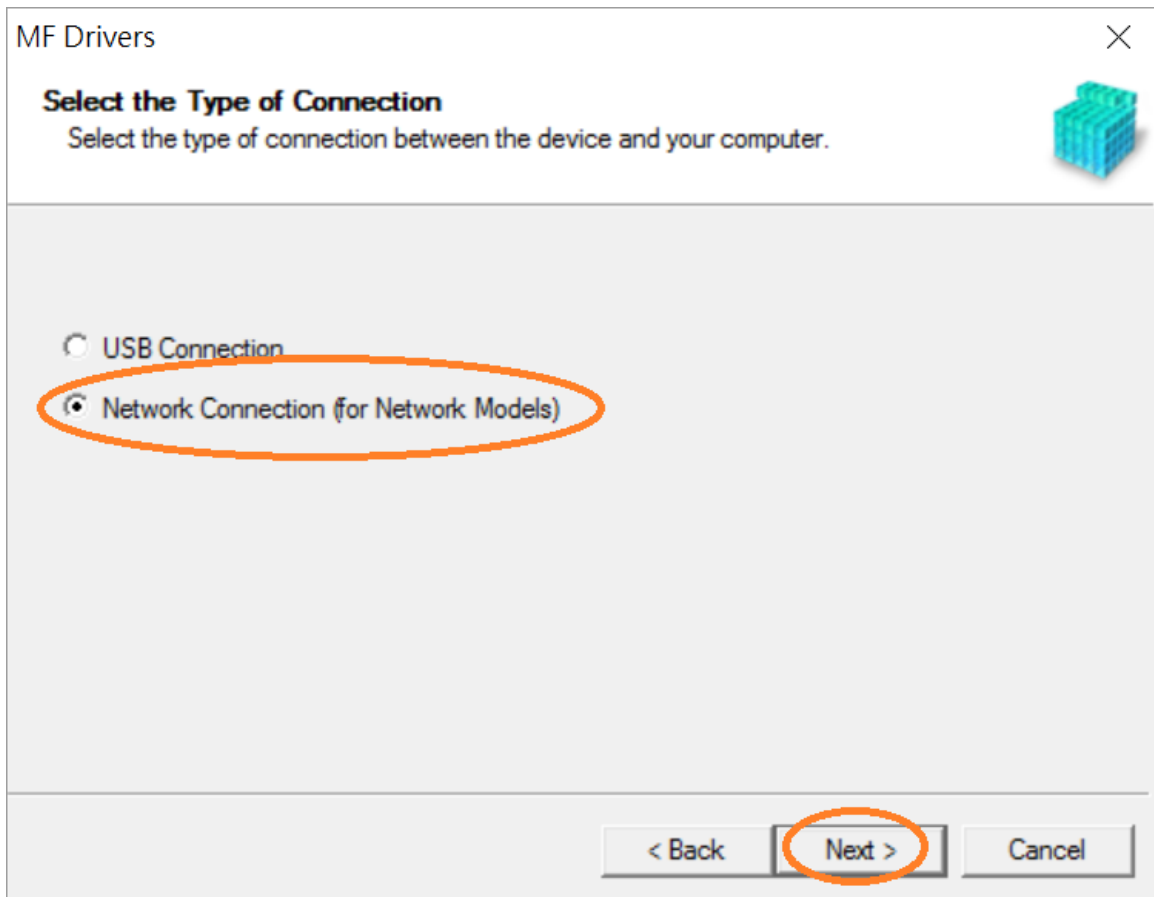

15. 按「是」
Click “Yes”

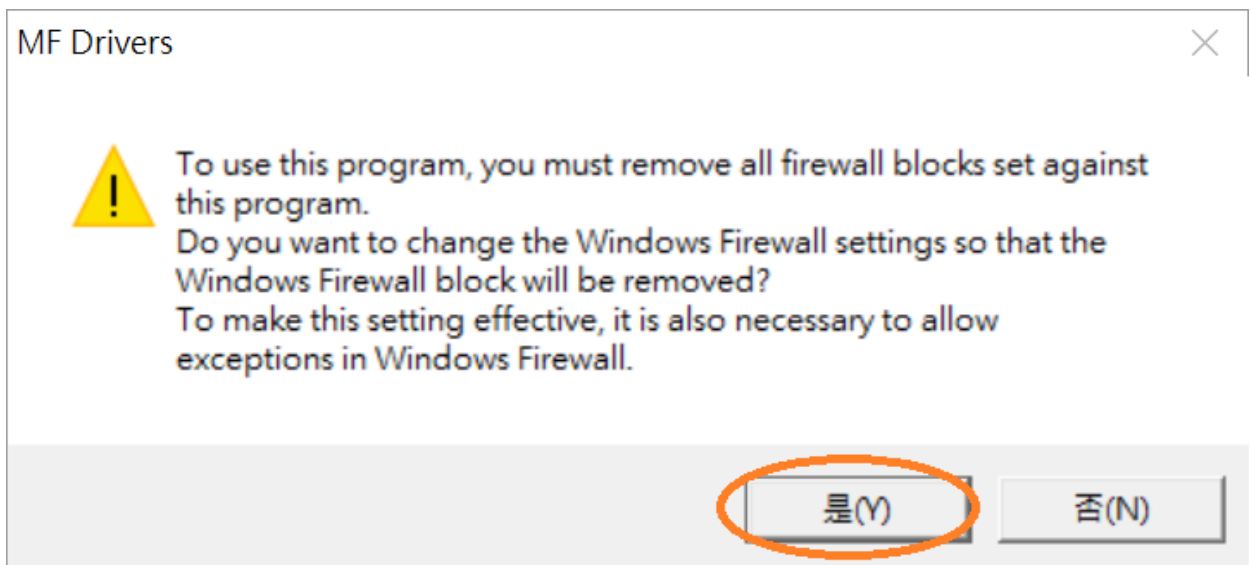

16. 選擇「MF240 Series」（以 MF410 Series 為例子），按「Next >」（如清單沒有印表機，請選「Search by IP Address」方法連接或聯絡客戶服務熱線 31912333 尋求支援）
Select “MF240 Series” (MF410 Series as example), click “Next >”(If there is no printer on the list, please select “Search by IP Address” method to connect or contact customer service hotline 31912333 to seek for support)

Device Name	MAC Address	IP Address	Location
MF410 Series	00:15:00:00:00:00	192.168.1.106	

17. 確認已剔選「Printer」「Fax (for Supported Models)」「Scanner」（以 MF410 Series 為例子），按「Next >」
Confirm the “Printer” “Fax for Supported Models” “Scanner” box is checked(MF410 Series as example), click “Next >”


Target Device
MF410 Series

Driver to Install:

- Printer
- Fax (for Supported Models)
- Scanner
- Canon Driver Information Assist Service

When you install this service and use shared or local printers, functions that allow you to obtain device information will be added to your computer.

18. 選擇「UFR II Printer Driver」（以 MF410 Series 為例子），按「Next >」
Select “UFR II Printer Driver” (MF410 Series as example), click “Next >”

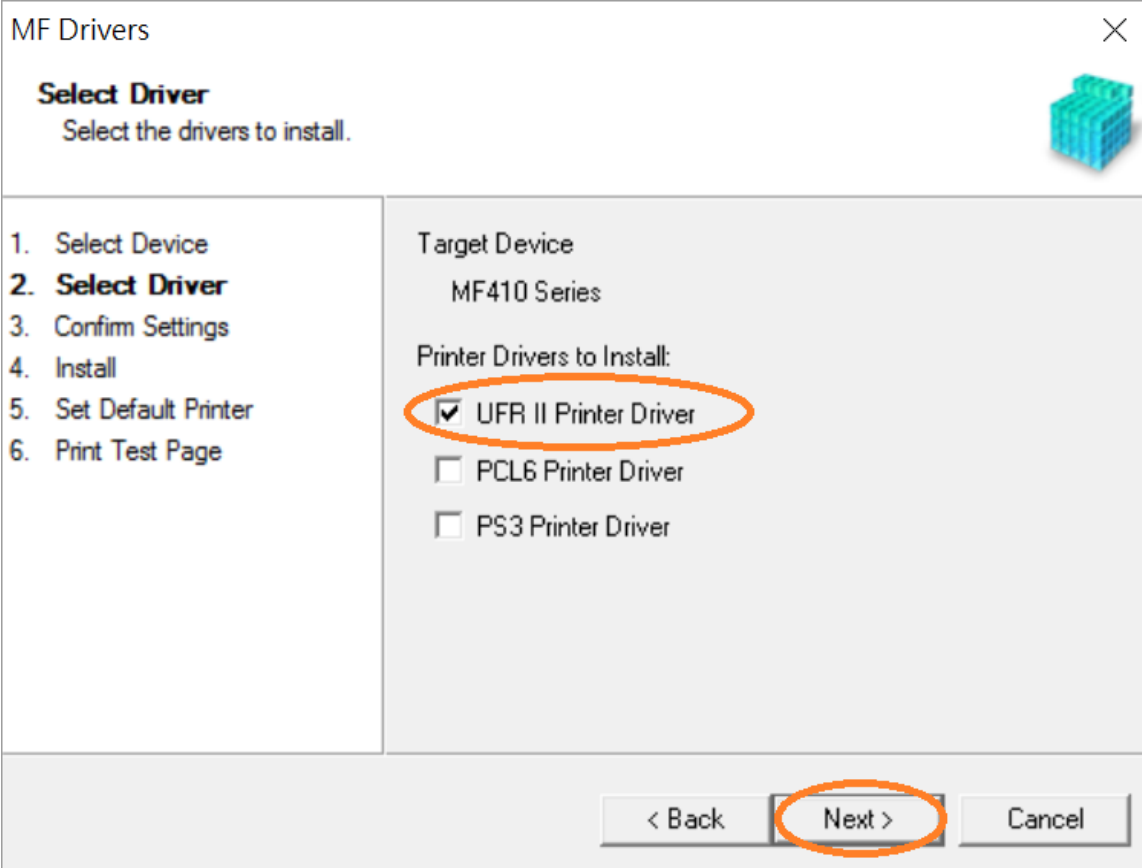

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page


Target Device
MF410 Series

Printer Drivers to Install:

UFR II Printer Driver
 PCL6 Printer Driver
 PS3 Printer Driver

< Back **Next >** Cancel

19. 按「Next >」（以 MF410 Series 為例子）
Click “Next >” (MF410 Series as example)

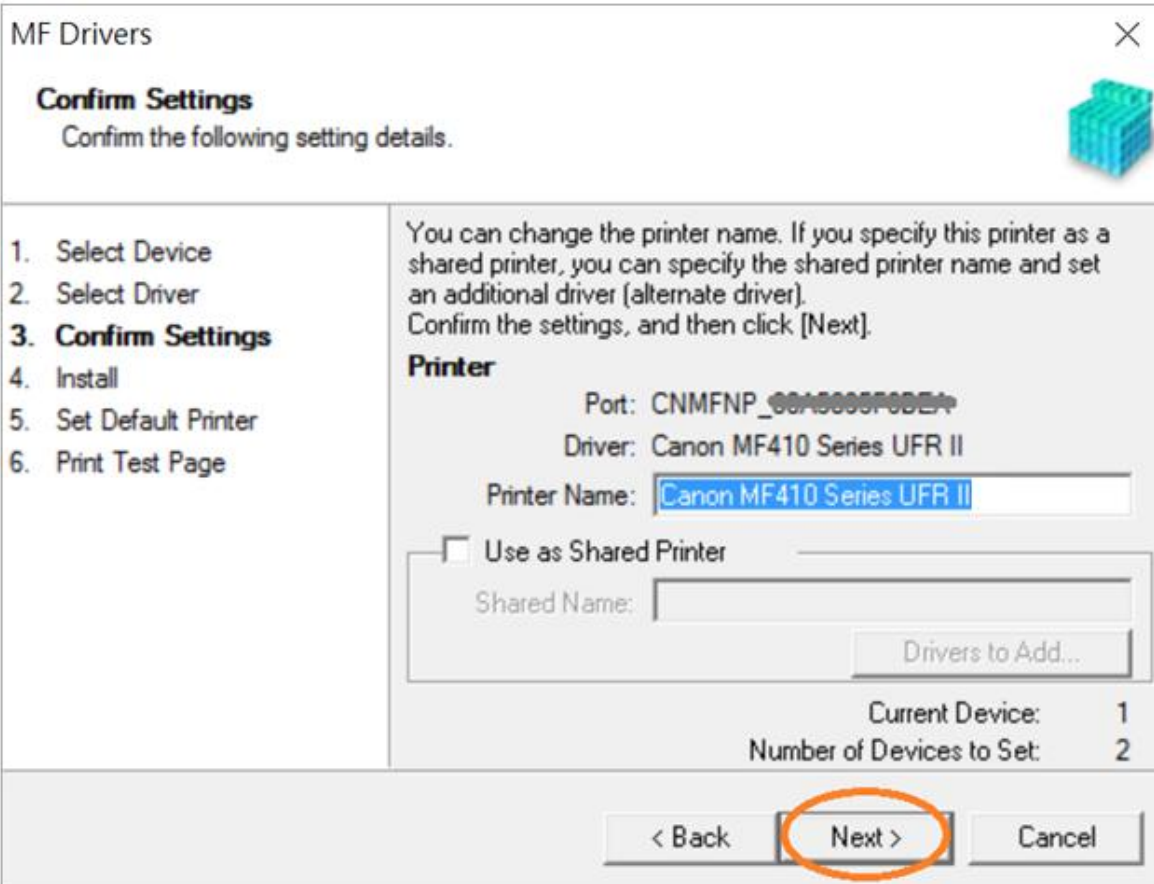

MF Drivers

Confirm Settings
Confirm the following setting details.

1. Select Device
2. Select Driver
3. **Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the printer name. If you specify this printer as a shared printer, you can specify the shared printer name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Printer

Port: CNMFNP_00A0000F00E1*
Driver: Canon MF410 Series UFR II
Printer Name:

Use as Shared Printer
Shared Name:

Current Device: 1
Number of Devices to Set: 2

< Back **Next >** Cancel

20. 按「Next >」(以 MF410 Series 為例子)

Click "Next >" (MF410 Series as example)

MF Drivers

Confirm Settings
Confirm the following setting details.

1. Select Device
2. Select Driver
- 3. Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the fax name. If you specify this fax as a shared fax, you can specify the shared fax name and set an additional driver (alternate driver).
Confirm the settings, and then click [Next].

Fax

Port: CNMFNP_00A5005F002A
Driver: Canon Generic FAX Driver (FAX)
Fax Name: Canon MF410 Series (FAX)

Use as Shared Fax

Shared Name:

Drivers to Add...

Current Device: 2
Number of Devices to Set: 2

< Back **Next >** Cancel

21. 按「Start」(以 MF410 Series 為例子)

Click "Start>" (MF410 Series as example)

MF Drivers

Confirm Settings
The setup program will install the drivers with the following settings.

1. Select Device
2. Select Driver
- 3. Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

Confirm the settings, then click [Start] to start installing.


Items for Installation:

Port: CNMFNP_00A5005F002A
Printer: Canon MF410 Series UFR II
Driver: Canon MF410 Series UFR II
Port: CNMFNP_00A5005F002A
Fax: Canon MF410 Series (FAX)
Driver: Canon Generic FAX Driver (FAX)
Port: CNMFNPSCAN_00A5005F002A
Scanner: Canon MF410 ser_00A5005F002A
Driver: Canon MF410 Series


< Back **Start** Cancel

22. 請等待安裝精靈成完安裝


Please wait for the setup wizard to accomplish installation

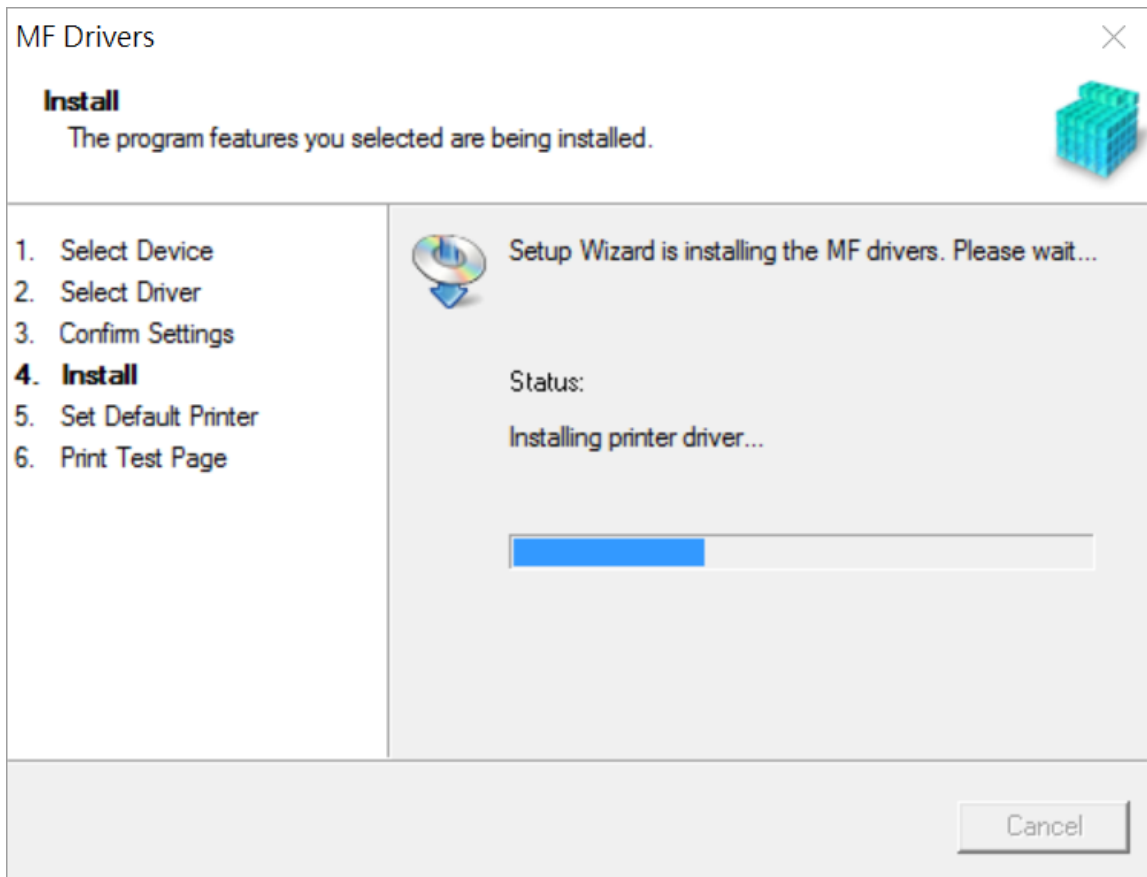

23. 選擇「Installed Printer: Canon MF240 Series UFR II」（以 MF410 Series 為例子），按「Next >」
Select "Installed Printer: Canon MF240 Series UFR II" (MF410 Series as example), click "Next >"

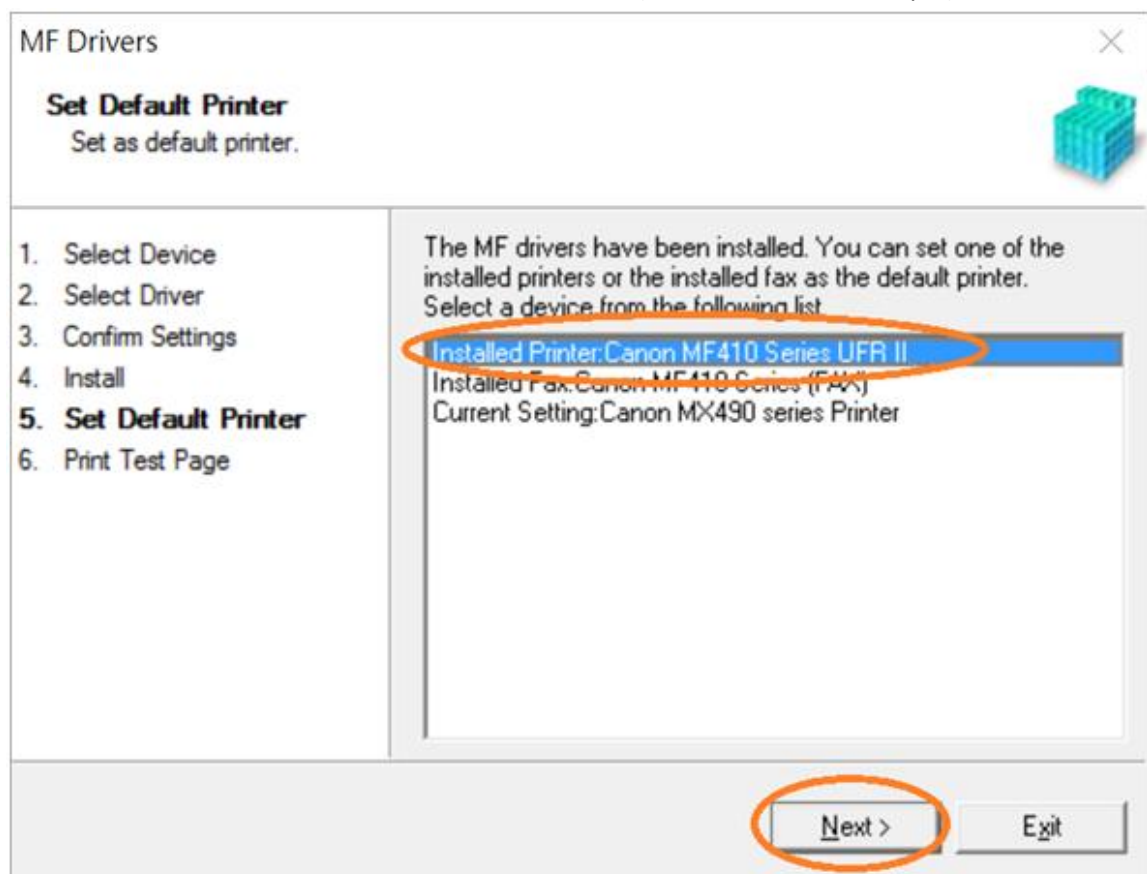


24. 可剔選「Printer: Canon MF 240 Series UFR II」以（MF410 Series 為例子）進行列印測試頁，按「Exit」
Can check the box at “Printer: Canon MF240 Series UFR II” (MF410 Series as example) to print a test page, click “Exit”

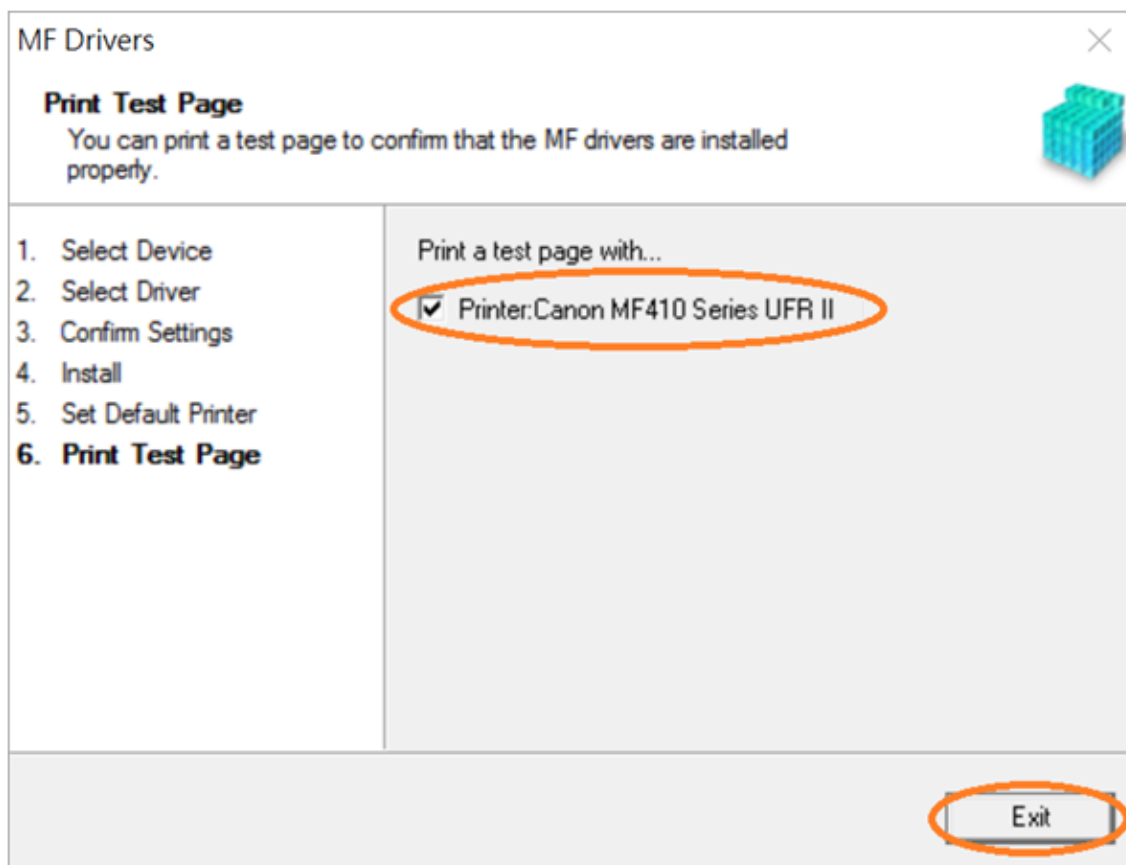


25. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF249dw/model>，選擇及下載掃描軟件 MF Scan Utility
Go to <https://hk.canon/en/support/imageCLASS%20MF249dw/model> , select and download the scanner software MF Scan Utility

26. 下載的文件以自解壓縮檔檔案 (.exe 格式) 保存在指定的文件夾中
The self extractor file (.exe format) is saved to specified folder

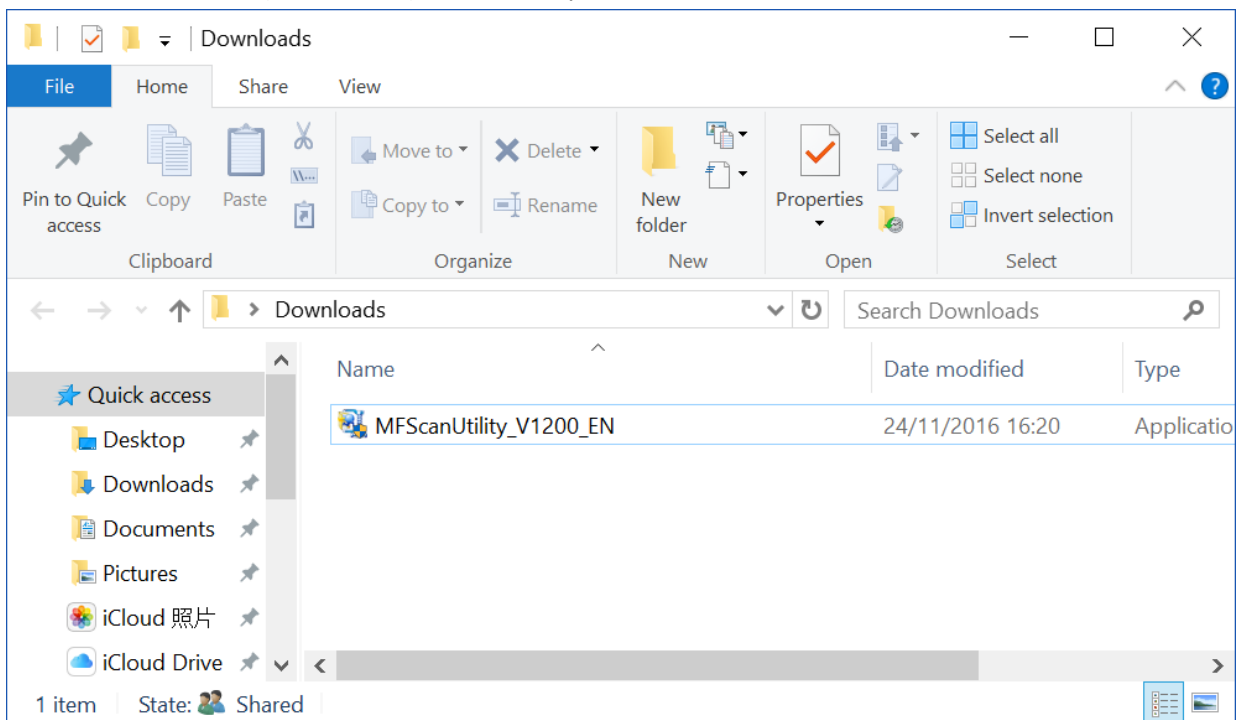


27. 打開「MFScanUtility_***.exe」檔案。將在同一文件夾中創建新文件夾，如打開文件解壓縮時出現「使用者帳戶控制」選項，按「是」，打開「MFScanUtility_***」文件夾
Open "MFScanUtility_***.exe" file, a new folder will be created. If "User Account Control" window pops up, click "Yes", open "MFScanUtility_***" file folder

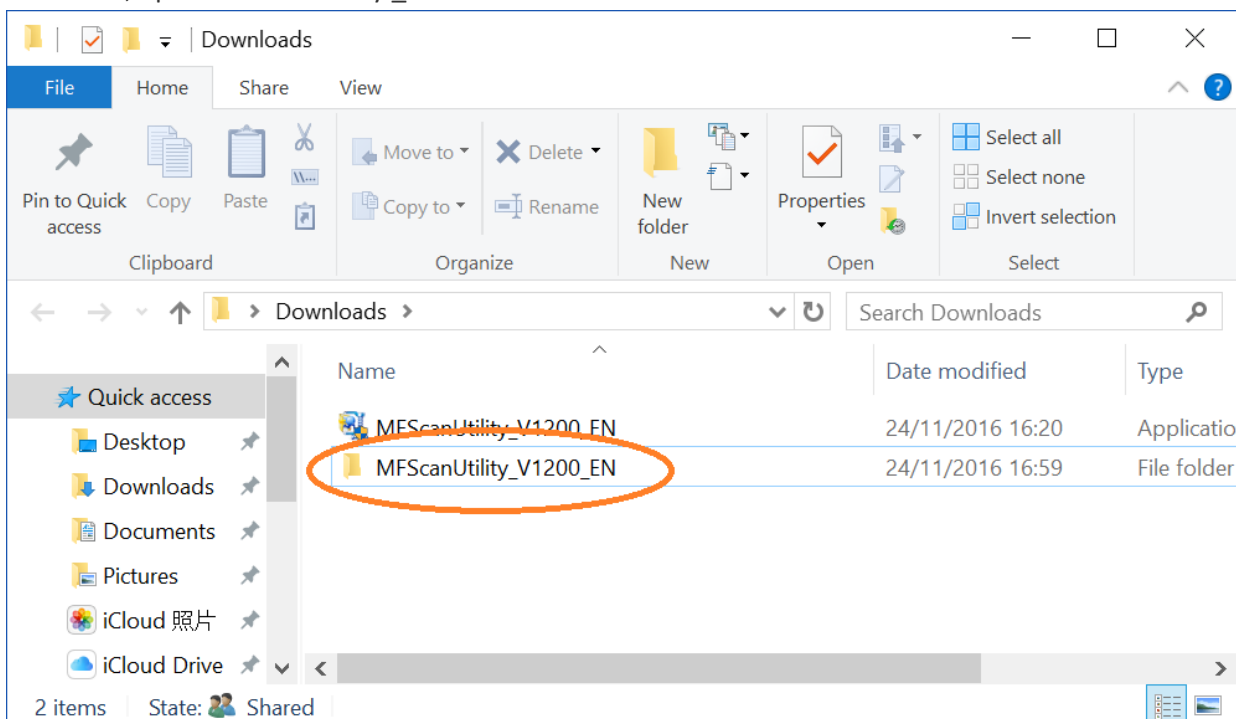


28. 開啓「SETUP.exe」檔案

Open "SETUP.exe" file

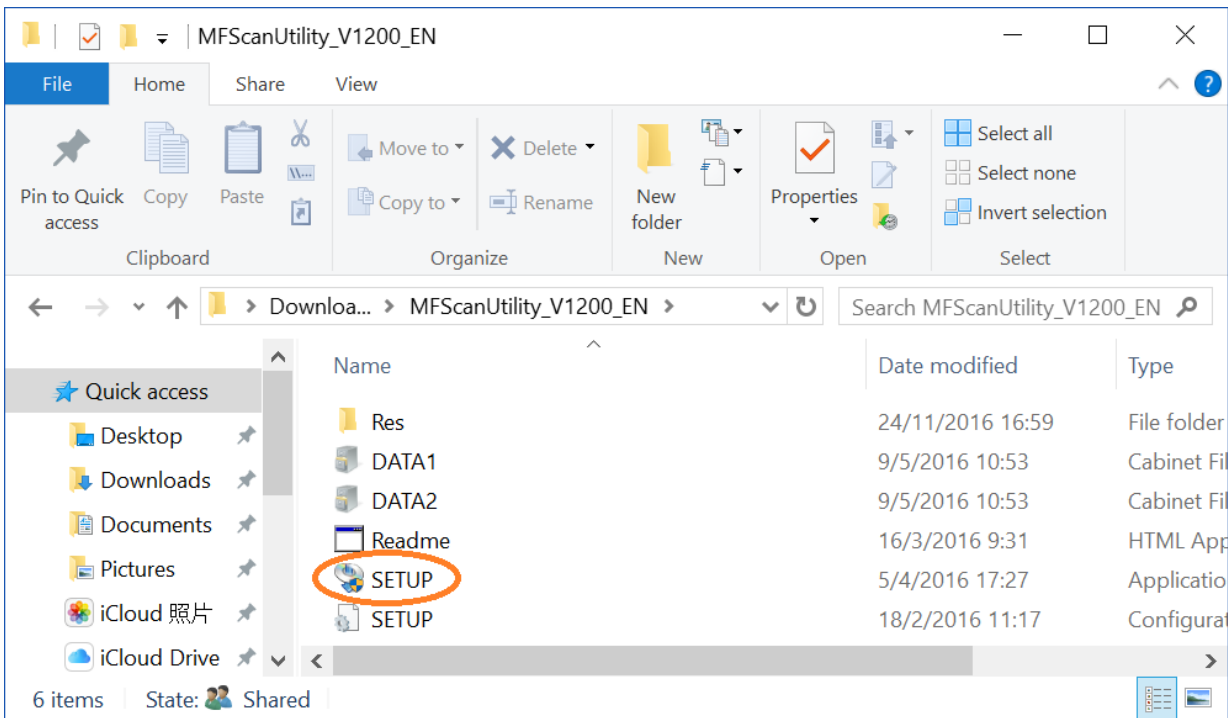


29. 按「Next >」


Click "Next >"

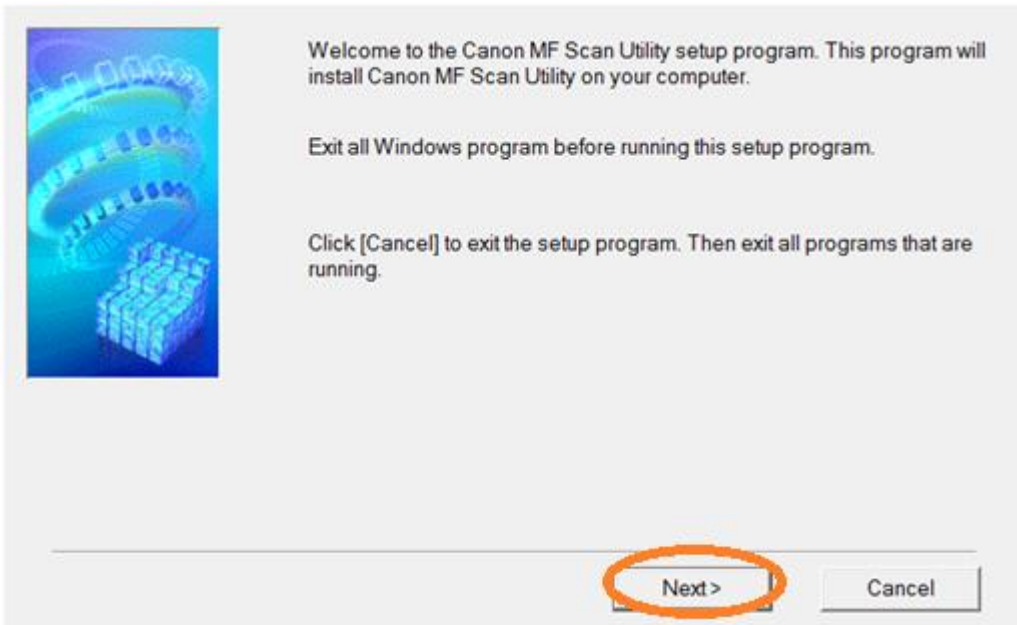

30. 按「Yes」
Click “Yes”

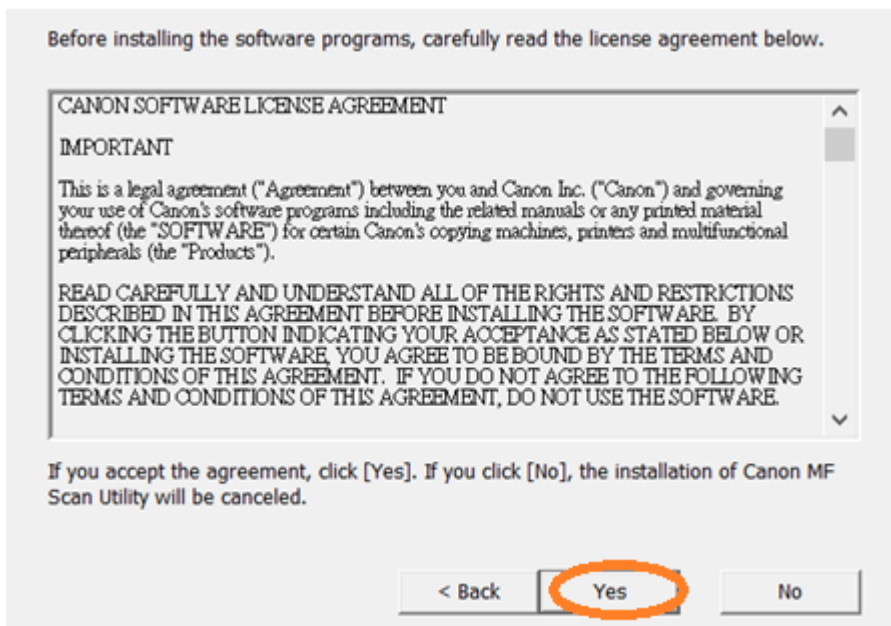

31. 按「Complete」
Click “Complete”

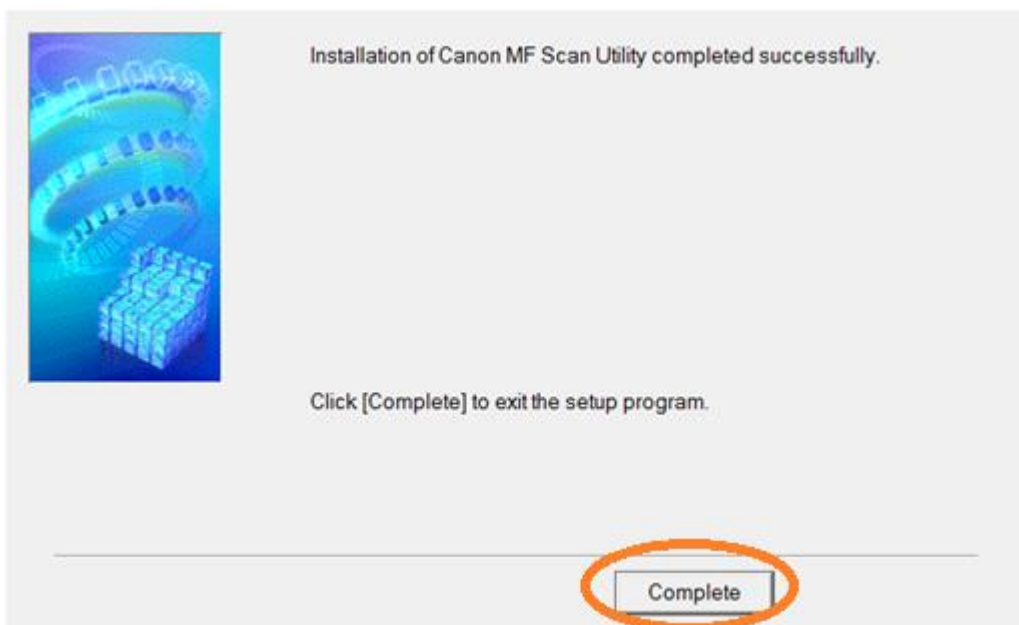

-完-
-End-