



透過無線網路連接安裝 MF237w 印表機的驅動程式步驟 (以 Win 10 作示範)
MF237w printer driver Installation Guide for Windows via Wi-Fi connection (Win 10 as example)

1. 開啟印表機，於印表機主畫面上點選「功能表」
Turn on printer, tap “Menu” on printer home screen

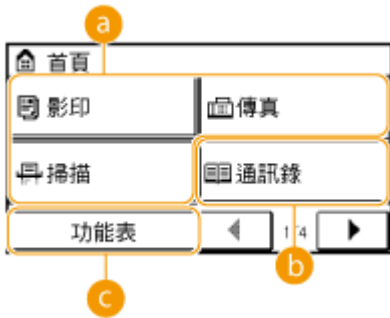

2. 點選「網路設定」
Tap “Network Settings”

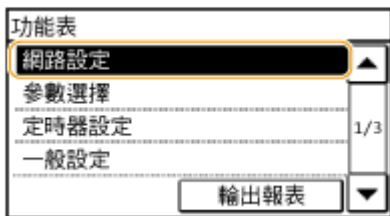

3. 點選「無線區域網路設定」(如顯示「是否啟用無線區域網路？」，點選「是」)
Tap “Wireless LAN Settings” (If the “Do you want to enable the wireless LAN?” message is displayed, tap “Yes”)



4. 閱讀顯示的訊息，點選「確定」
Read the message that is displayed, tap “OK”

5. 點選「SSID 設定」
Tap “SSID Settings”




6. 點選「選擇存取點」

Tap "Select Access Point"



7. 選擇無線網路名稱

Select a wireless network name

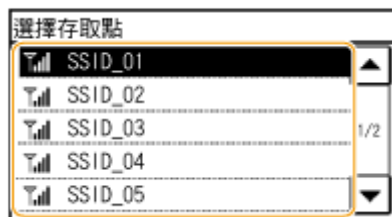

8. 使用數字鍵輸入 Wi-Fi 密碼，點選「套用」

Enter the Wi-Fi password using the numeric keys, tap "Apply"




9. 點選「是」

Tap "Yes"



10. 檢查控制面板上的 Wi-Fi 指示燈是否閃爍
當偵測到無線網路，Wi-Fi 指示燈會閃爍
Check that the Wi-Fi indicator is blinking on the operation panel
The Wi-Fi indicator blinks when a wireless network is detected

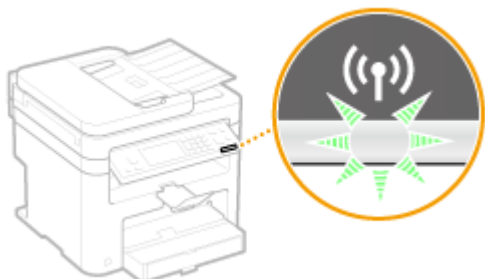

當設定完成，會顯示以下畫面，約 2 秒後 Wi-Fi 指示燈會亮起
When the setup is completed, the screen below is displayed, and approximately 2 seconds later, the Wi-Fi indicator lights up



到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF237w/model>

下載印表機的驅動程式 - MF237w/MF232w MFDivers (UFR II / FAX / ScanGear)

Go to <https://hk.canon/en/support/imageCLASS%20MF237w/model>


Download the printer driver - MF237w/MF232w MFDivers (UFR II / FAX / ScanGear)

11. 下載完成後，打開驅動程式 安裝檔案
Open driver installation file after downloaded


12. 按「Next >」
Click "Next >"




13. 按「Yes」
Click "Yes"

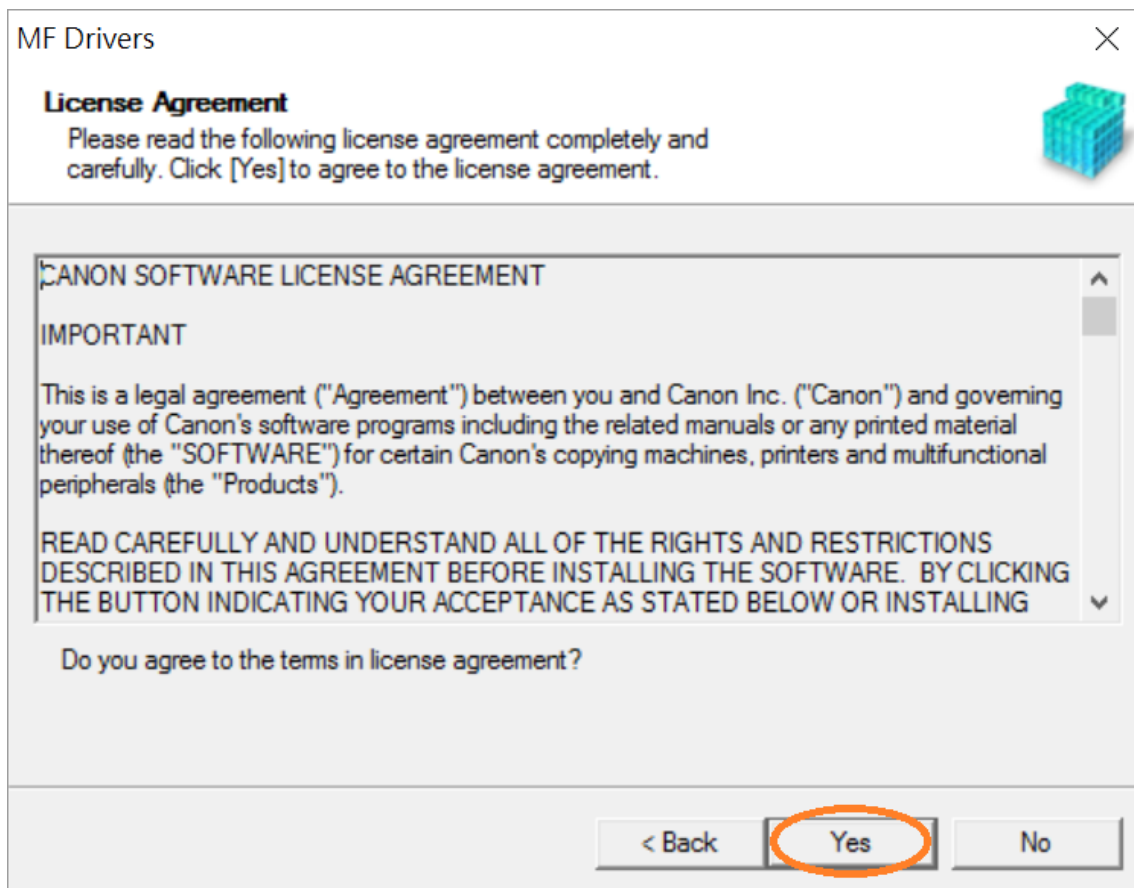


14. 選擇「Network Connection (for Network Models)」，按「Next >」
Select "Network Connection (for Network Models)", click "Next >"

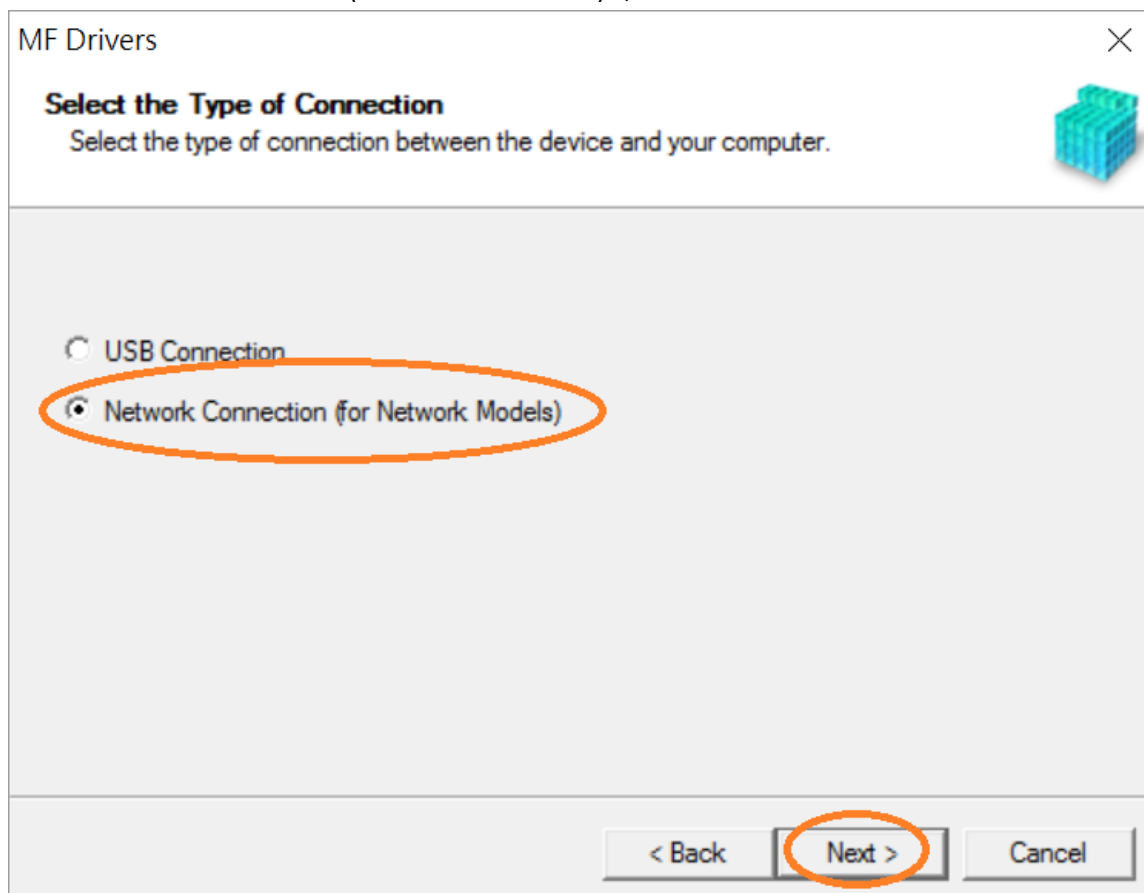

15. 按「是」
Click "Yes"

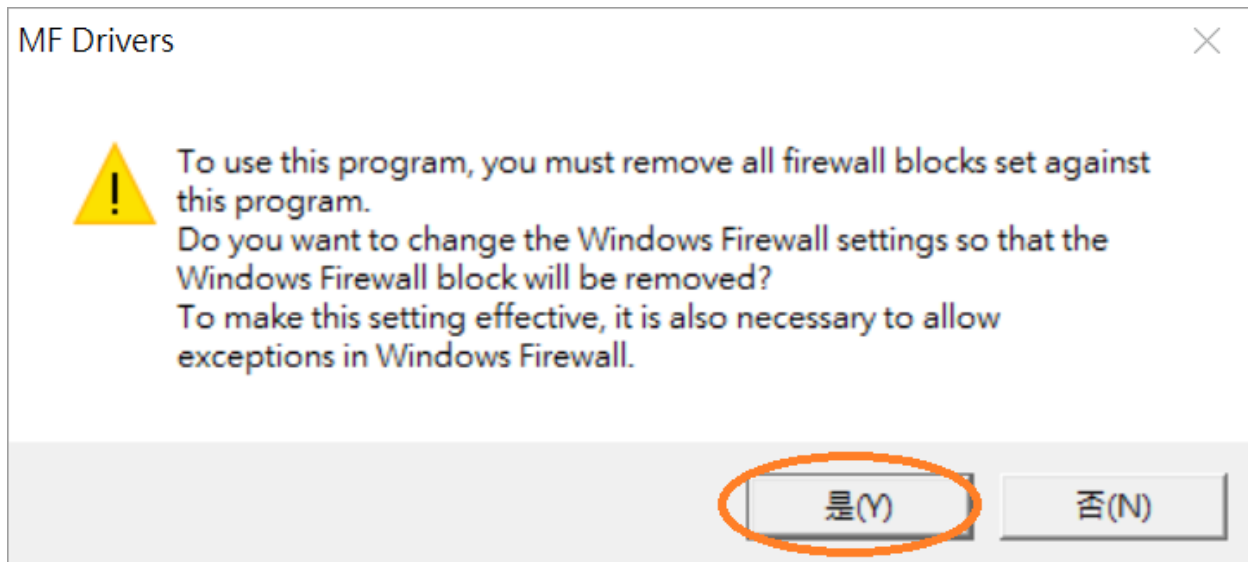

16. 選擇「MF230 Series」（以 MF410 Series 為例子），按「Next >」（如清單沒有印表機，請選「Search by IP Address」方法連接或聯絡客戶服務熱線 31912333 尋求支援）
Select "MF230 Series" (MF410 Series as example), click "Next >" (If there is no printer on the list, please select "Search by IP Address" method to connect or contact customer service hotline 31912333 to seek for support)

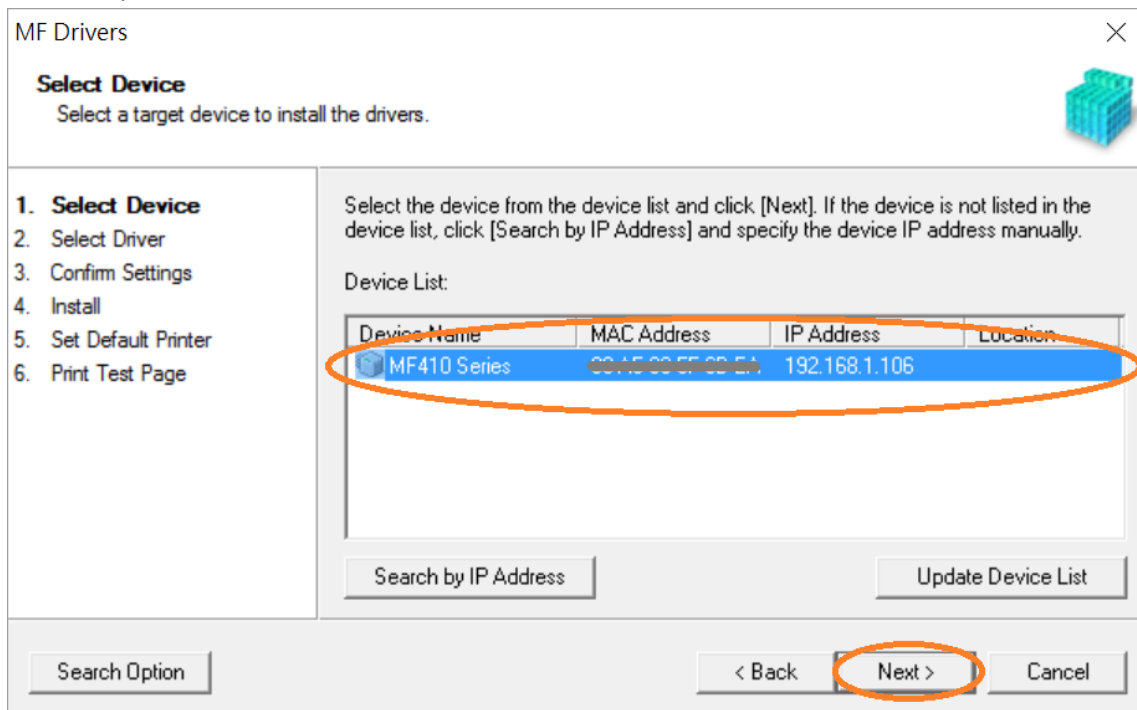

17. 確認已剔選「Printer」「Fax (for Supported Models)」「Scanner」（以 MF410 Series 為例子），按「Next >」

Confirm the “Printer” “Fax for Supported Models” “Scanner” box is checked(MF410 Series as example), click “Next >”

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. Select Driver
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Target Device
MF410 Series


Driver to Install:

Printer
 Fax (for Supported Models)
 Scanner

Canon Driver Information Assist Service
When you install this service and use shared or local printers, functions that allow you to obtain device information will be added to your computer.

< Back **Next >** Cancel

18. 選擇「UFR II Printer Driver」（以 MF410 Series 為例子），按「Next >」
Select "UFR II Printer Driver" (MF410 Series as example), click "Next >"

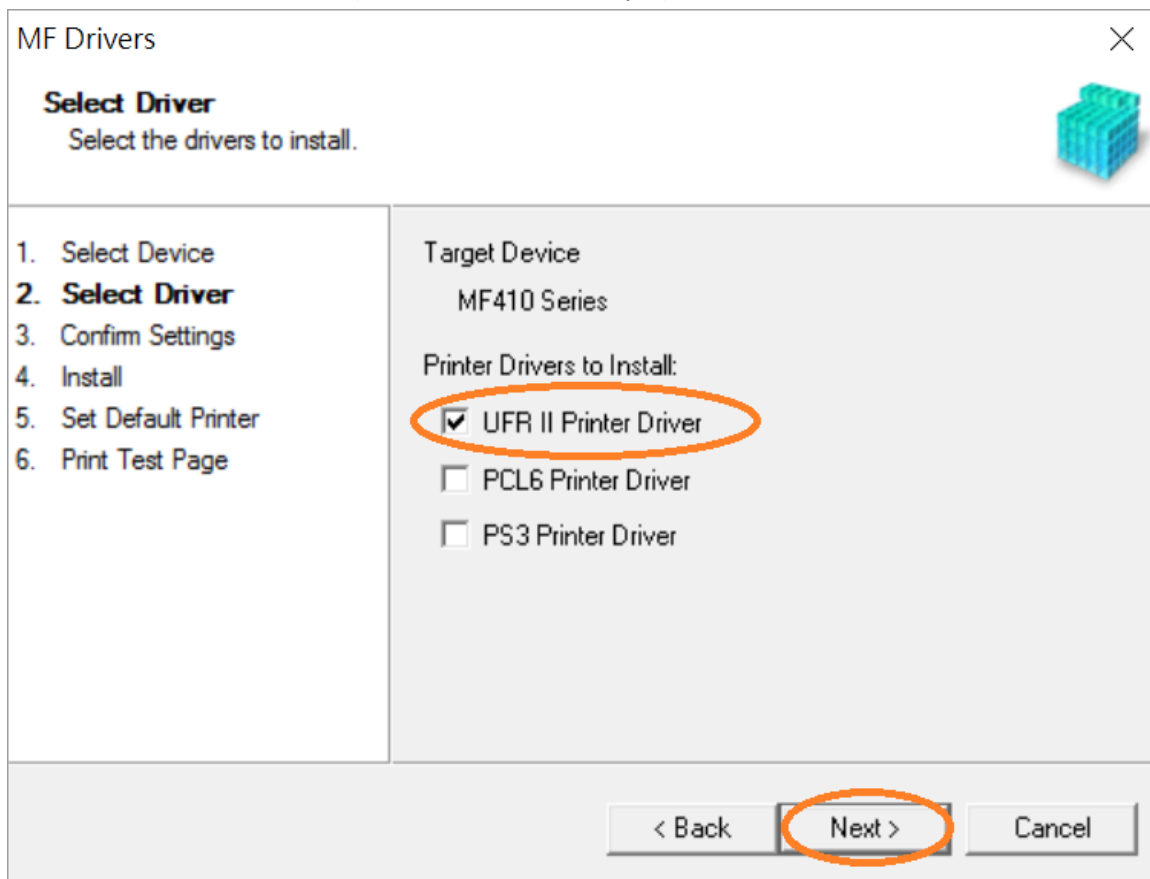

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page


Target Device
MF410 Series

Printer Drivers to Install:

- UFR II Printer Driver
- PCL6 Printer Driver
- PS3 Printer Driver

< Back **Next >** Cancel

19. 按「Next >」（以 MF410 Series 為例子）
Click "Next >" (MF410 Series as example)

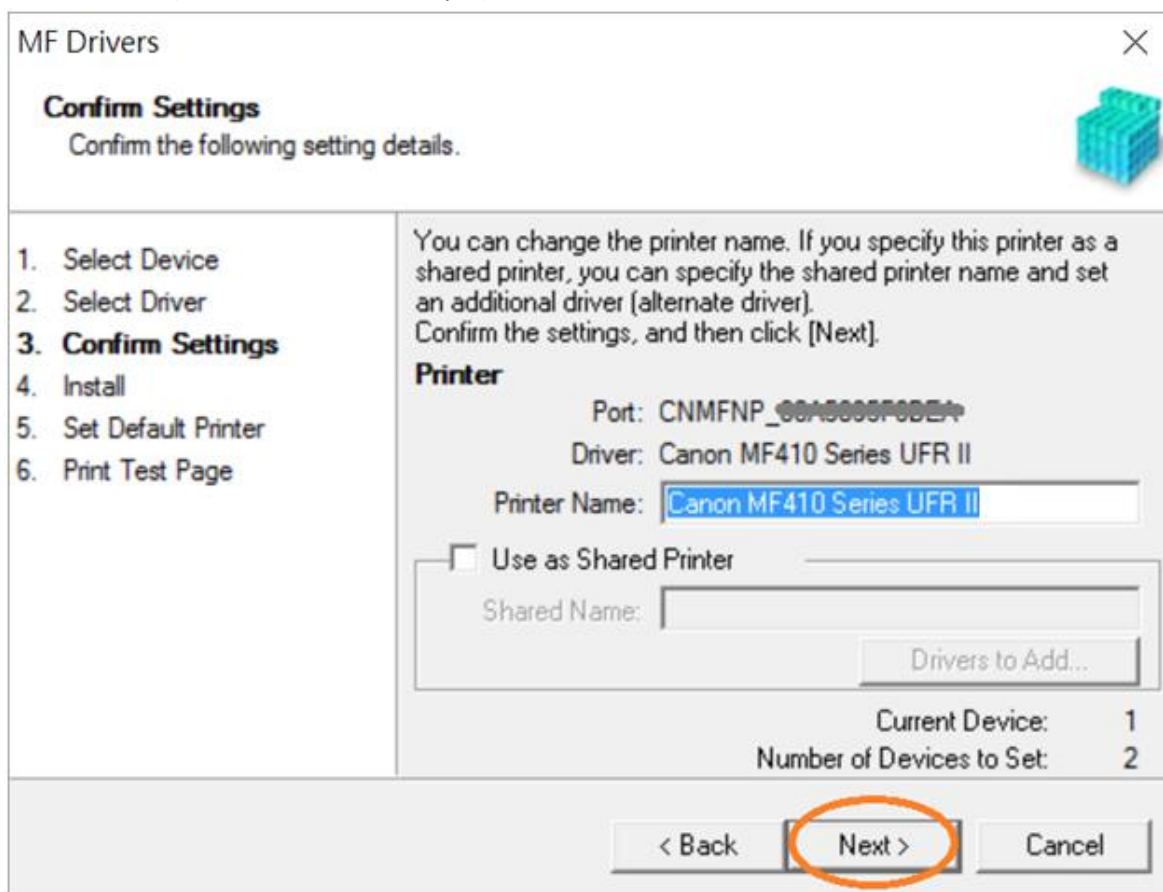

MF Drivers

Confirm Settings
Confirm the following setting details.

1. Select Device
2. Select Driver
3. **Confirm Settings**
4. Install
5. Set Default Printer
6. Print Test Page

You can change the printer name. If you specify this printer as a shared printer, you can specify the shared printer name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Printer

Port: CNMFNP_00A5005F00E*

Driver: Canon MF410 Series UFR II

Printer Name: Canon MF410 Series UFR II

Use as Shared Printer


Shared Name: _____

Drivers to Add...


Current Device: 1
Number of Devices to Set: 2

< Back **Next >** Cancel

20. 按「Next >」(以 MF410 Series 為例子)
Click "Next >" (MF410 Series as example)

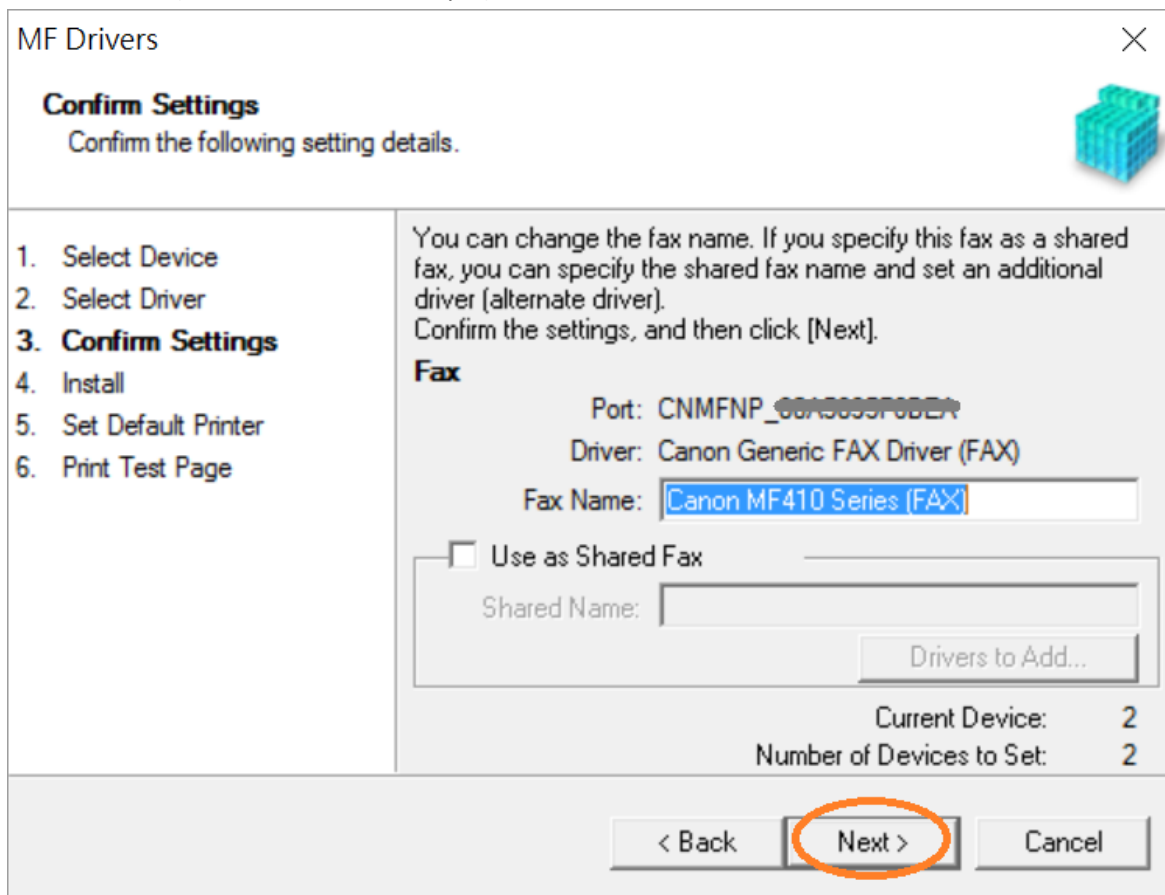


21. 按「Start」(以 MF410 Series 為例子)
Click "Start>" (MF410 Series as example)

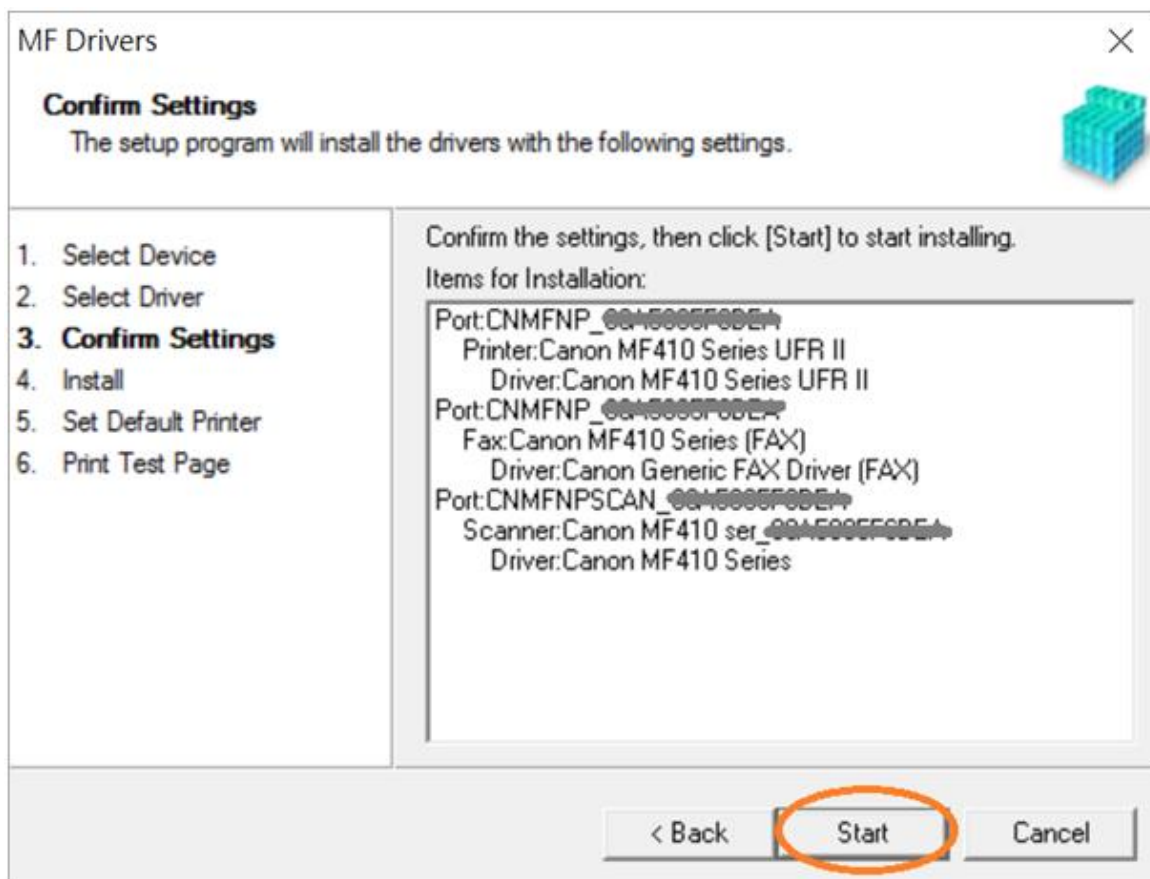


22. 請等待安裝精靈成完安裝


Please wait for the setup wizard to accomplish installation

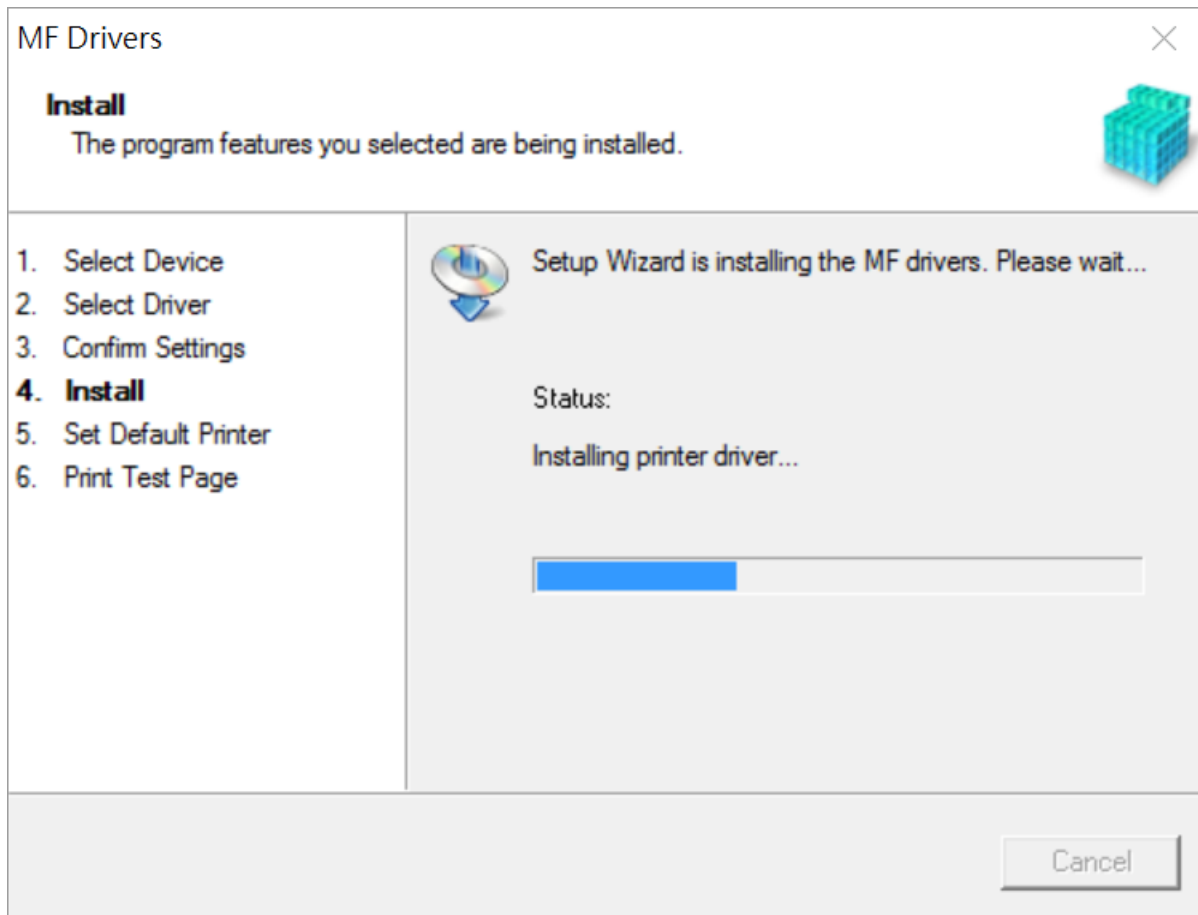

23. 選擇「Installed Printer: Canon MF230 Series UFR II」（以 MF410 Series 為例子），按「Next >」
Select "Installed Printer: Canon MF230 Series UFR II" (MF410 Series as example), click "Next >"

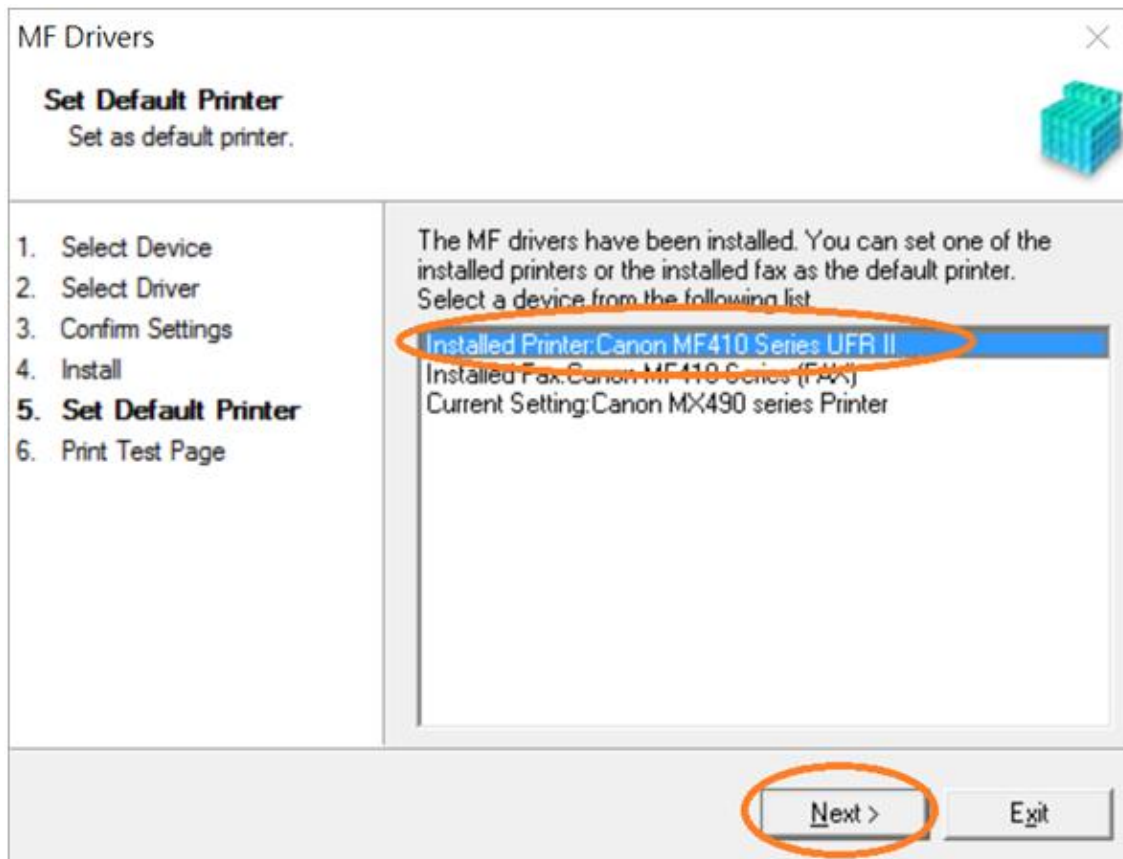


24. 可剔選「Printer: Canon MF 230 Series UFR II」以（MF410 Series 為例子）進行列印測試頁，按「Exit」
Can check the box at “Printer: Canon MF230 Series UFR II” (MF410 Series as example) to print a test page, click “Exit”

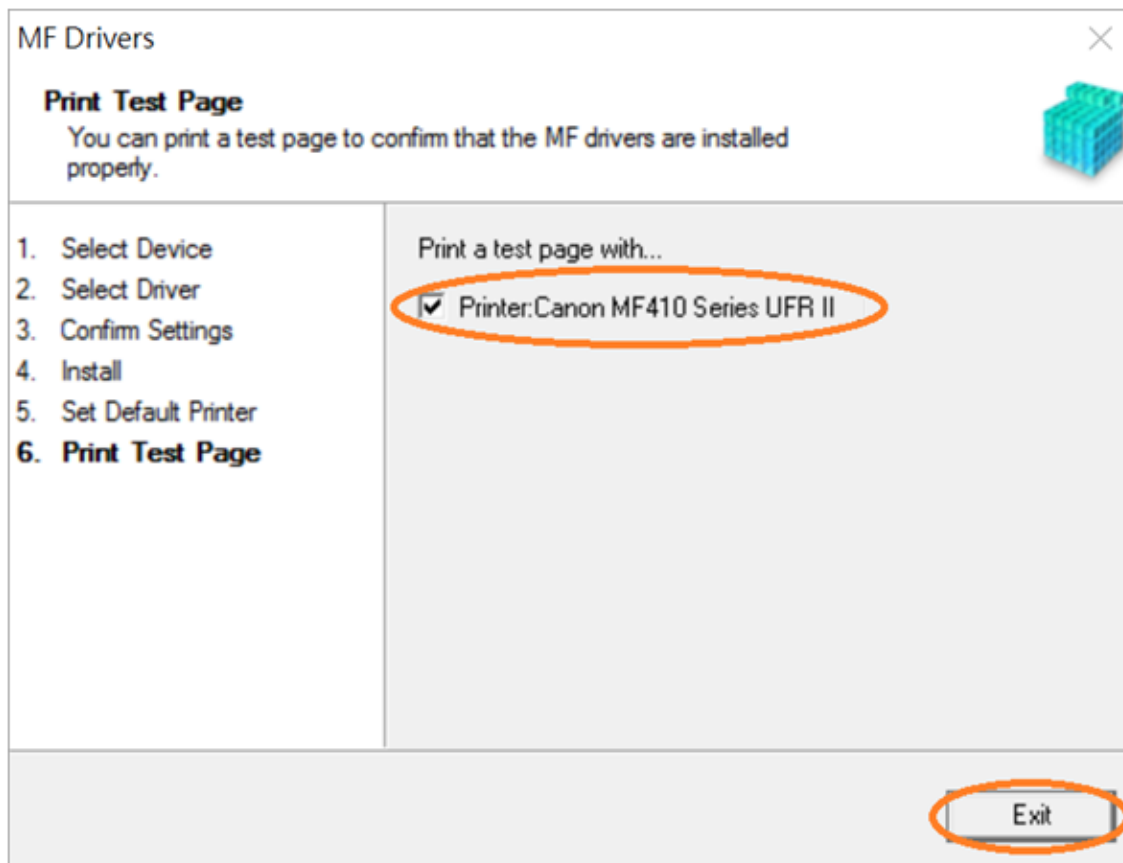


25. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF246dn/model>
下載下載掃描軟件- [Windows 32bit & 64bit] MF Scan Utility Ver.x.x.x
Go to <https://hk.canon/en/support/imageCLASS%20MF246dn/model>
Download the scanning software - [Windows 32bit & 64bit] MF Scan Utility Ver.x.x.x

26. 下載的文件以自解壓縮檔檔案（.exe 格式）保存在指定的文件夾中
The self extractor file (.exe format) is saved to specified folder

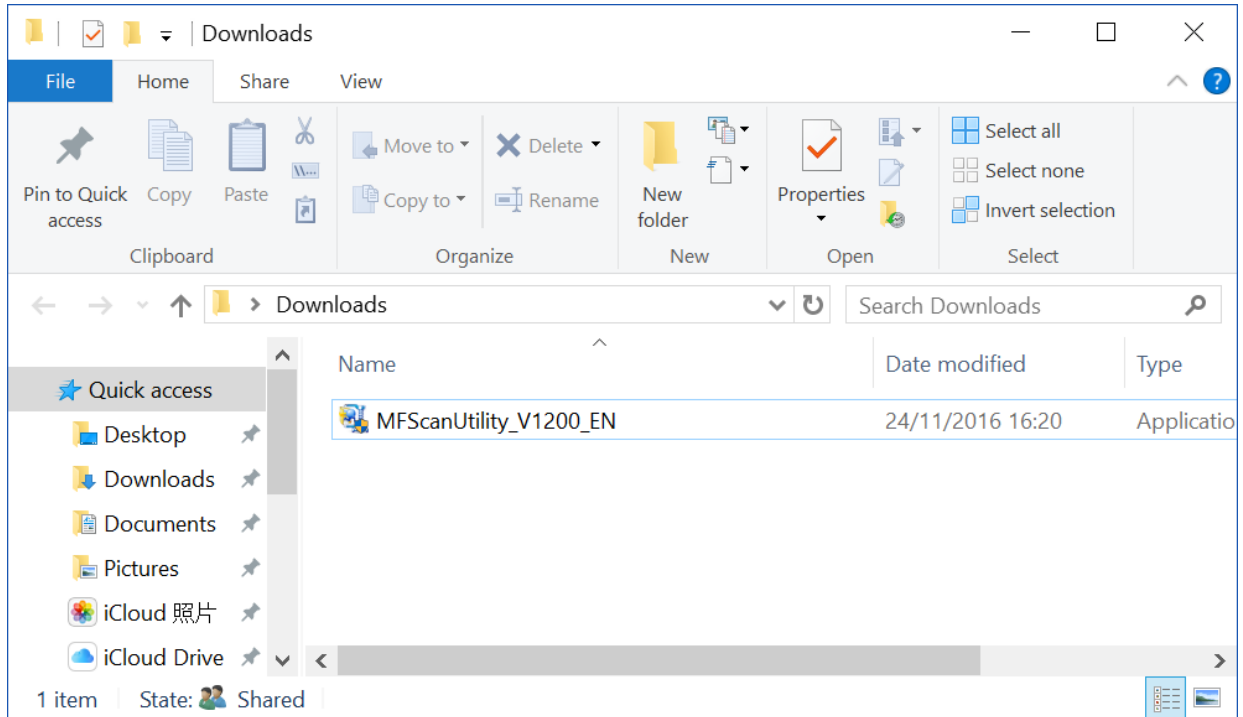


27. 打開「MFScanUtility_***.exe」檔案。將在同一文件夾中創建新文件夾，如打開文件解壓縮時出現「使用者帳戶控制」選項，按「是」，打開「MFScanUtility_***」文件夾
Open “MFScanUtility_***.exe” file, a new folder will be created. If “User Account Control” window pops up, click “Yes”, open “MFScanUtility_***” file folder

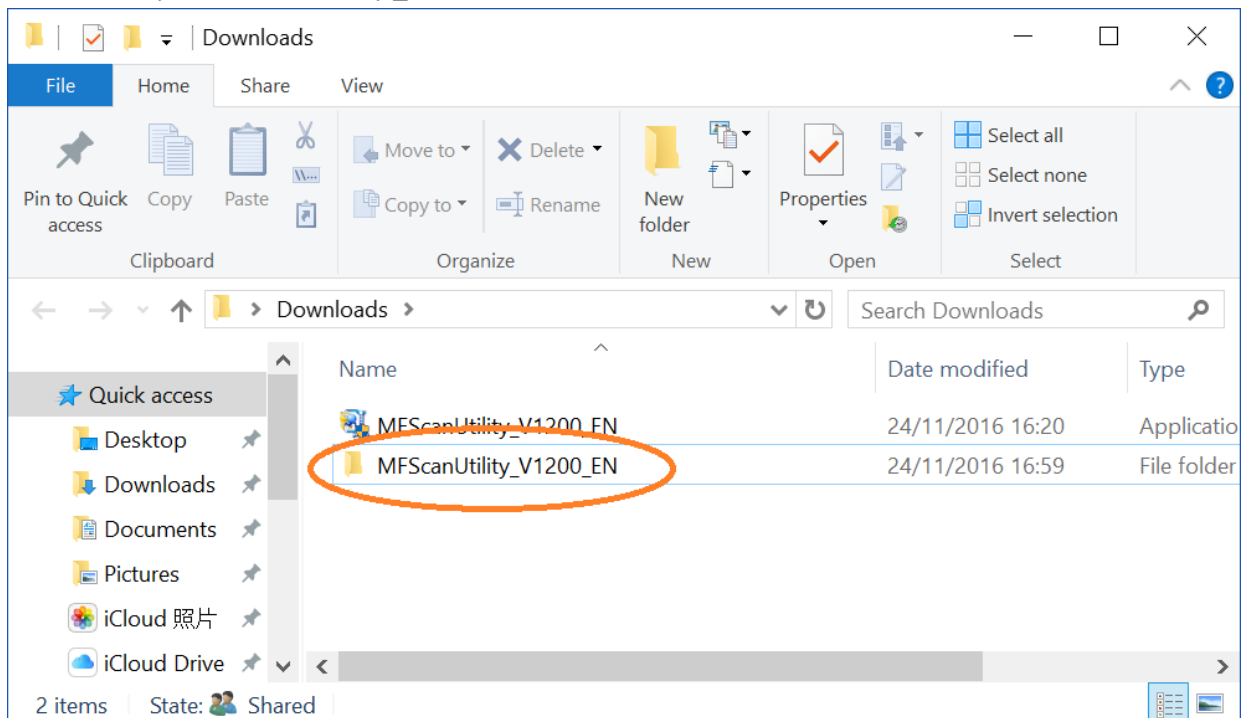


28. 開啓「SETUP.exe」檔案

Open "SETUP.exe" file

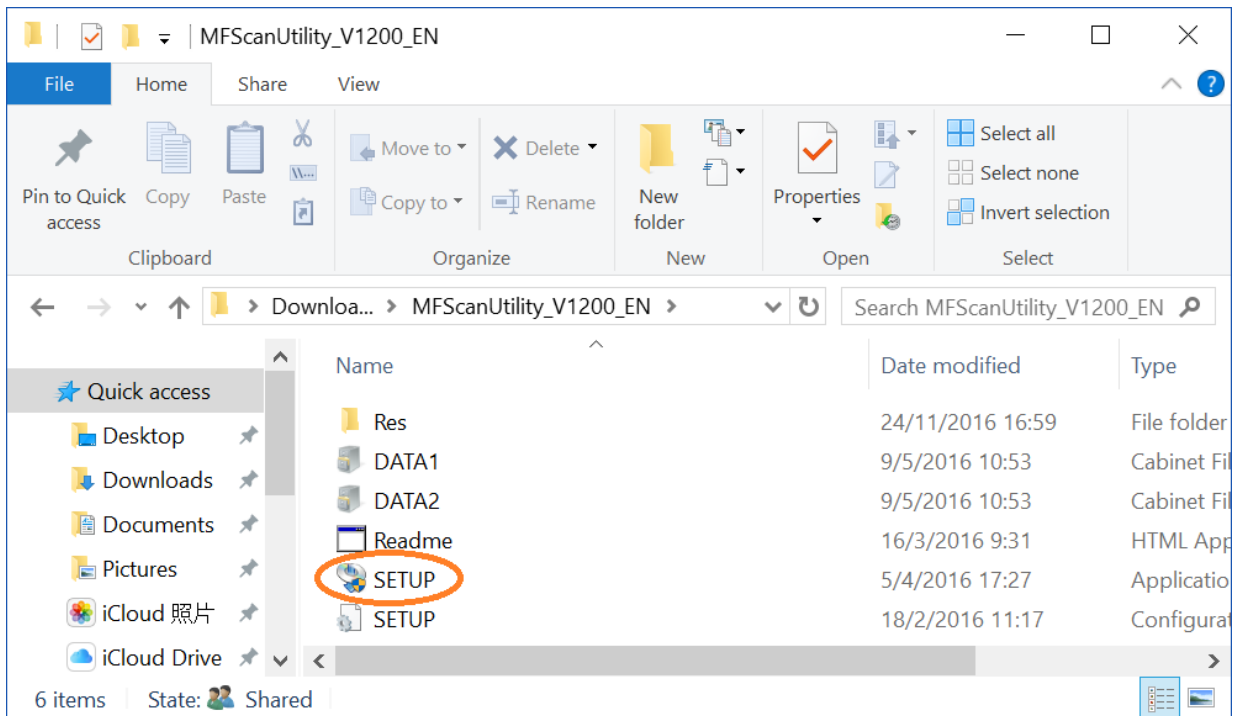


29. 按「Next >」


Click "Next >"

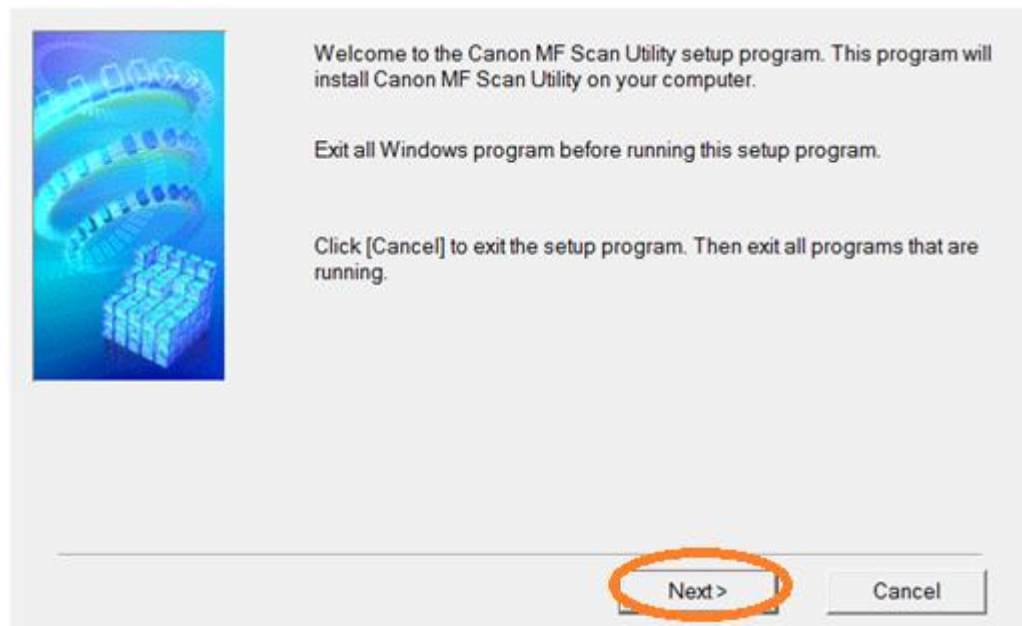

30. 按「Yes」
Click “Yes”

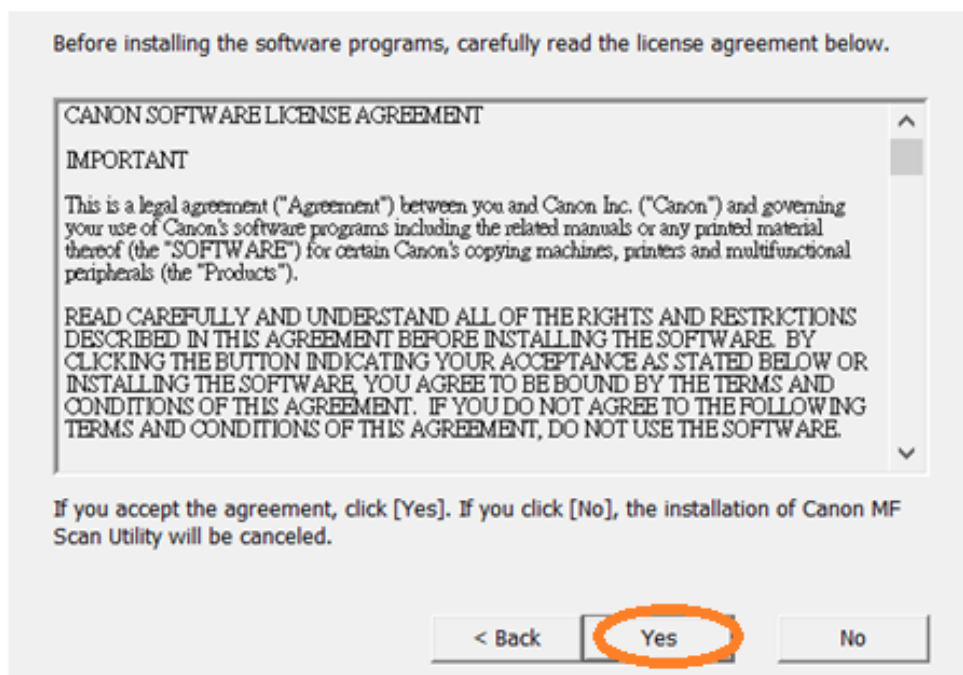

31. 按「Complete」
Click “Complete”

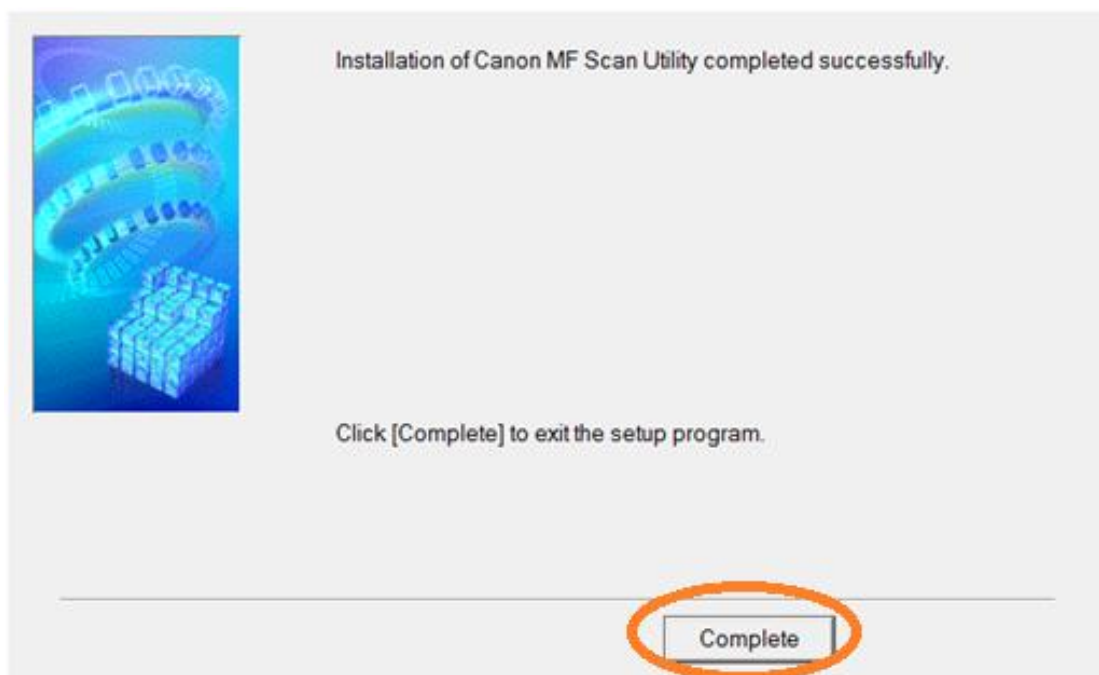

-完-
-End-