



在Mac OSX以Wi-Fi連接安裝G4010驅動程式步驟 (以Mac OSX作示範)
G4010 printer driver Installation Guide for Mac OSX Via Wi-Fi (Mac OSX as example)



*請開啟打印機並確保電腦已連接互聯網

*Please turn on the printer and make sure computer already connected to the internet

連接印表機至無線網路路由器


Connect printer to Wi-Fi router

1. 按  (設定) 按鈕，使用  按鈕選擇 (無線LAN設定)，然後按OK按鈕

Press  (Setup) button, Use the  button to select (Wireless LAN setup), and press the OK button



2. 選擇 (手動連接)，然後按OK按鈕
Select (Manual connect), and press the OK button

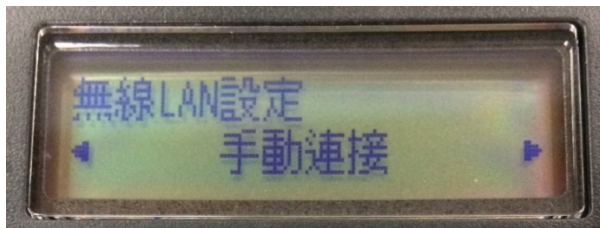

3. 選擇所用無線路由器 (以CHK-CC_NEW 為例子)，然後按OK按鈕
Select your wireless router(CHK-CC_NEW as example), and press the OK button



4. 確認所選無線路由器名稱正確 (以CHK-CC_NEW 為例子)，然後按OK按鈕
Make sure your wireless router's name is correct(CHK-CC_NEW as example), and press the OK button




5. 輸入網路密碼（WEP金鑰或密碼，輸入字完大小寫須相符。可按 * 按鈕切換輸入模式至數字、大小字母），然後按OK按鈕

Enter the network password (WEP key or passphrase, character entry is case-sensitive. Can press * button for switching the input mode to number, lowercase and uppercase letters), and then press the OK button



6. 已連接，然後按OK按鈕
Connected, and then press the OK button

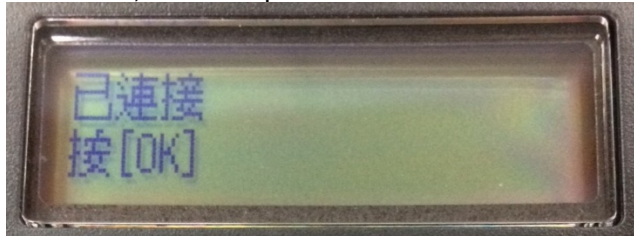

7. 在Mac電腦上，點選左上角的蘋果圖示，選擇系統偏好設定 > 印表機與掃描器，再點選左下角的「+」進入下圖的新增印表機視窗。選擇印表機「Canon G4010 Series」（種類為Bonjour多功能），確定「使用」為「Secure AirPrint」，然後按「加入」

On the Mac system, click the Apple icon on the top left corner, then choose “System Preferences”>”Printers and Scanners”. Click the “+” icon on the bottom left corner, then choose name as “Canon G4010 series” (Kind: Bonjour Multifunction), and make sure “Secure AirPrint” in “Use” column , and then click “Add”

