

透過無線網路連接安裝 MF429x 印表機的驅動程式步驟 (以 Win 10 作示範)
MF429x printer driver Installation Guide for Windows via Wi-Fi connection (Win 10 as example)

先將打印機連接到網路，詳細可參考以下步驟

Connect printer to network first, please refer to following procedure

1. 開啟印表機
Turn on the printer
2. 在主畫面中點選「功能表」
Tap “Menu” in the Home Screen
3. 點選「參數選擇」，再點選「網路」
Tap “Preferences”, then tap “Network”
4. 點選「無線區域網路設定」
Tap “Wireless LAN Settings”
5. 點選 <SSID 設定>
Tap “SSID setting”
6. 點選 <選擇存取點>
Tap “Select Access Point”
7. 選擇無線區域網路路由器名稱(SSID)
Select the wireless router’s signal (SSID)



8. 使用數字鍵輸入網路金鑰（路由器密碼），然後點選 <套用>
Enter the network key using the numeric keys, and tap “Apply”
9. 點選 <是>
Tap “Yes”
10. 設定完成時，會顯示「已連線」
Wait until message “Connected” is displayed

等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until the IP address settings of the machine complete


下載及安裝步驟

Driver download and installation procedure


11. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF429x/model> ，下載印表機的驅動程式
Go to <https://hk.canon/en/support/imageCLASS%20MF429x/model>, download the printer driver
12. 選擇並下載以下檔案
Choose and download below files:
 - 打印機驅動程式 / Printer Driver
[\[Windows xxbit\] MF429x/MF426dw MFDDrivers \(Generic Plus UFR II/ Generic Plus PCL6/ Generic Plus PS3/ Generic FAX/ ScanGear\)](#)
 - 掃描器軟件 / Scanning software
[\[Windows 32bit & 64bit\] MF Scan Utility Ver.x.x.x.x](#)
13. 下載完成後，打開驅動程式安裝檔案「MF429MFDriverVxxxxxxx.exe」
Open driver installation file “MF429MFDriverVxxxxxxx.exe ” after downloaded
14. 按「Next >」
Click “Next >”




15. 按「Yes」
Click "Yes"

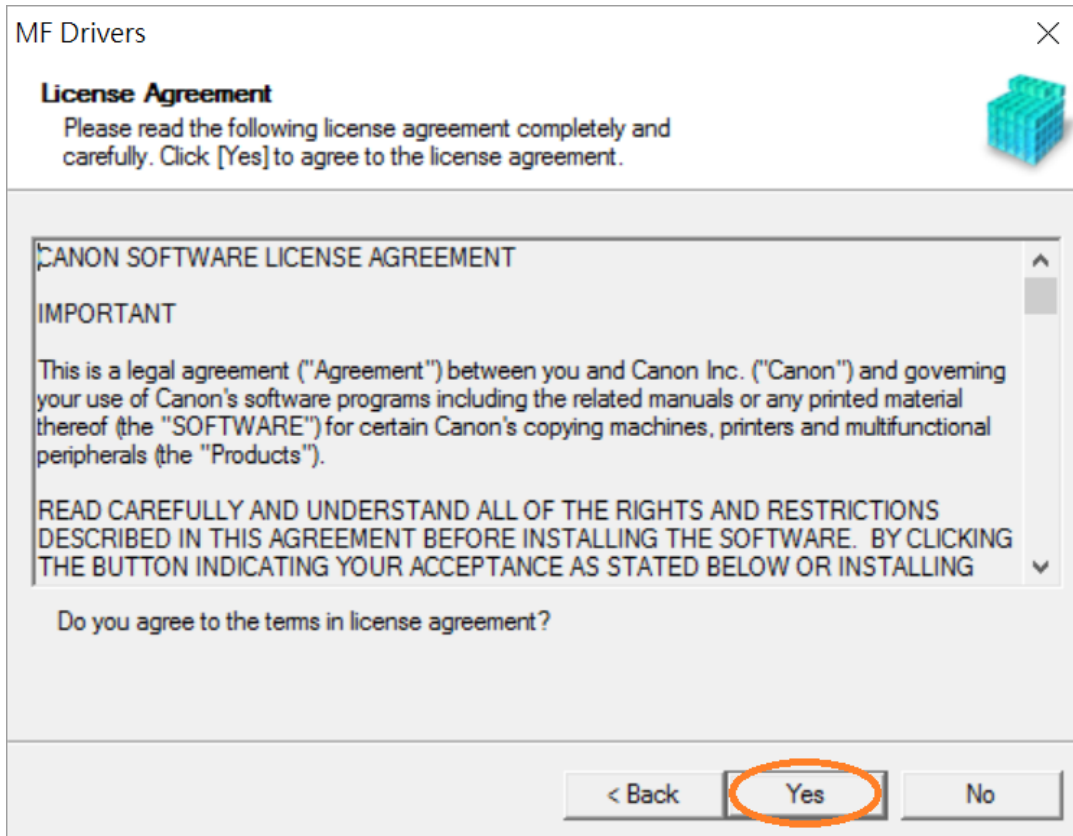


16. 選擇「Network Connection (for Network Models)」，按「Next >」
Select "Network Connection (for Network Models)", click "Next >"

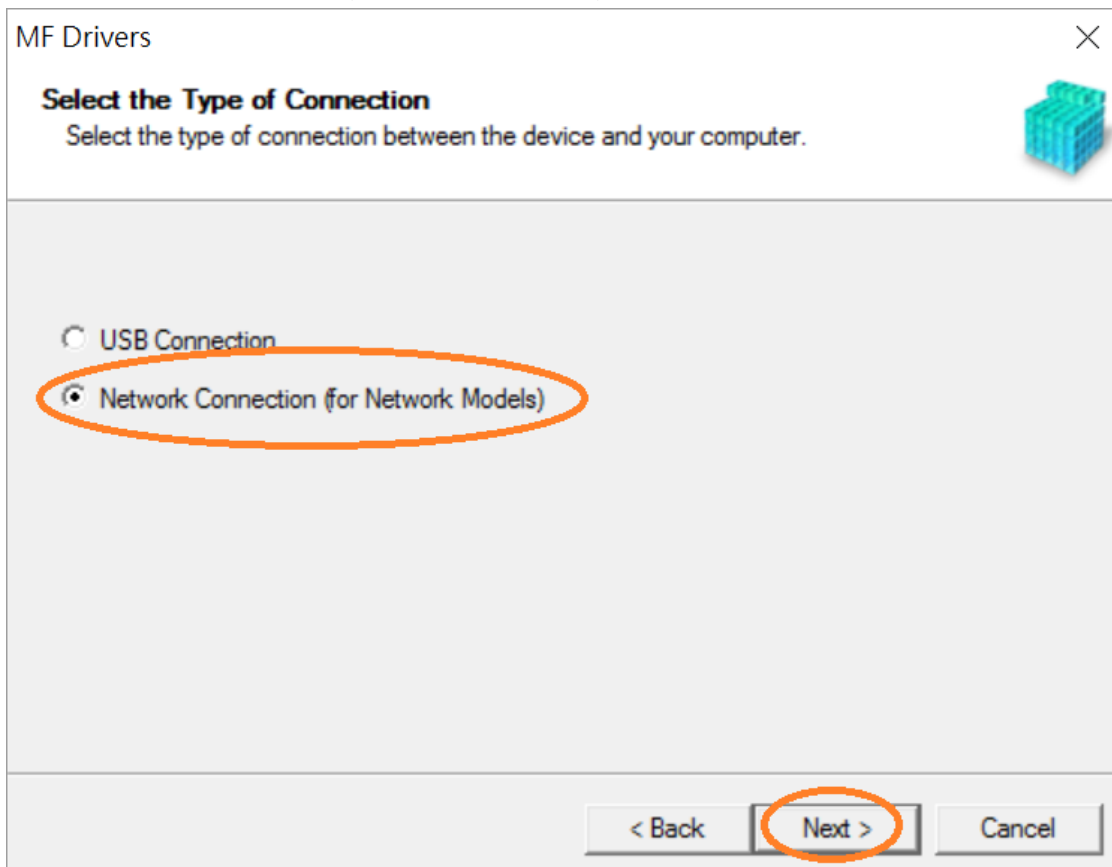

17. 按「是」
Click "Yes"

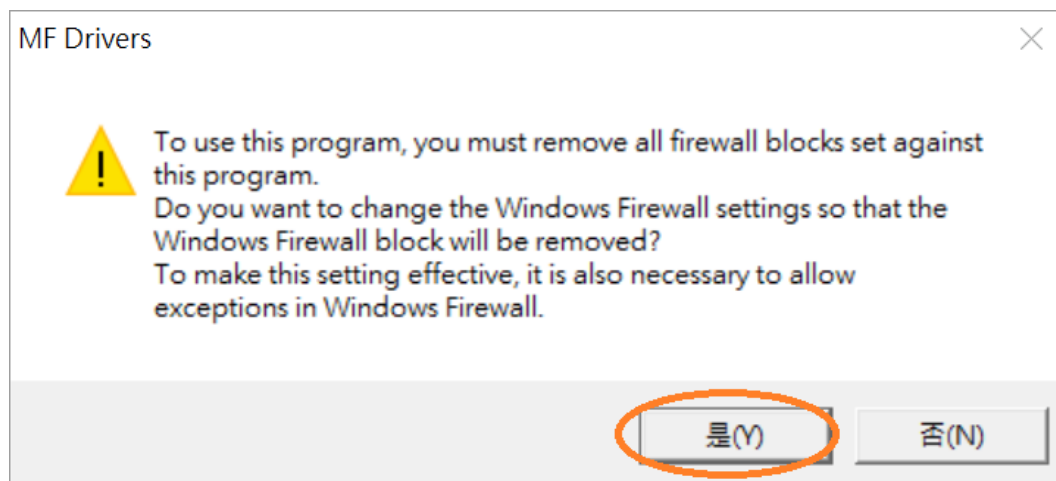

18. 選擇「MF420 Series」（以 MF410 Series 為例子），按「Next >」（如清單沒有印表機，請選「Search by IP Address」方法連接或聯絡客戶服務熱線 31912333 尋求支援）
Select "MF420 Series" (MF410 Series as example), click "Next >" (If there is no printer on the list, please select "Search by IP Address" method to connect or contact customer service hotline 31912333 to seek for support)

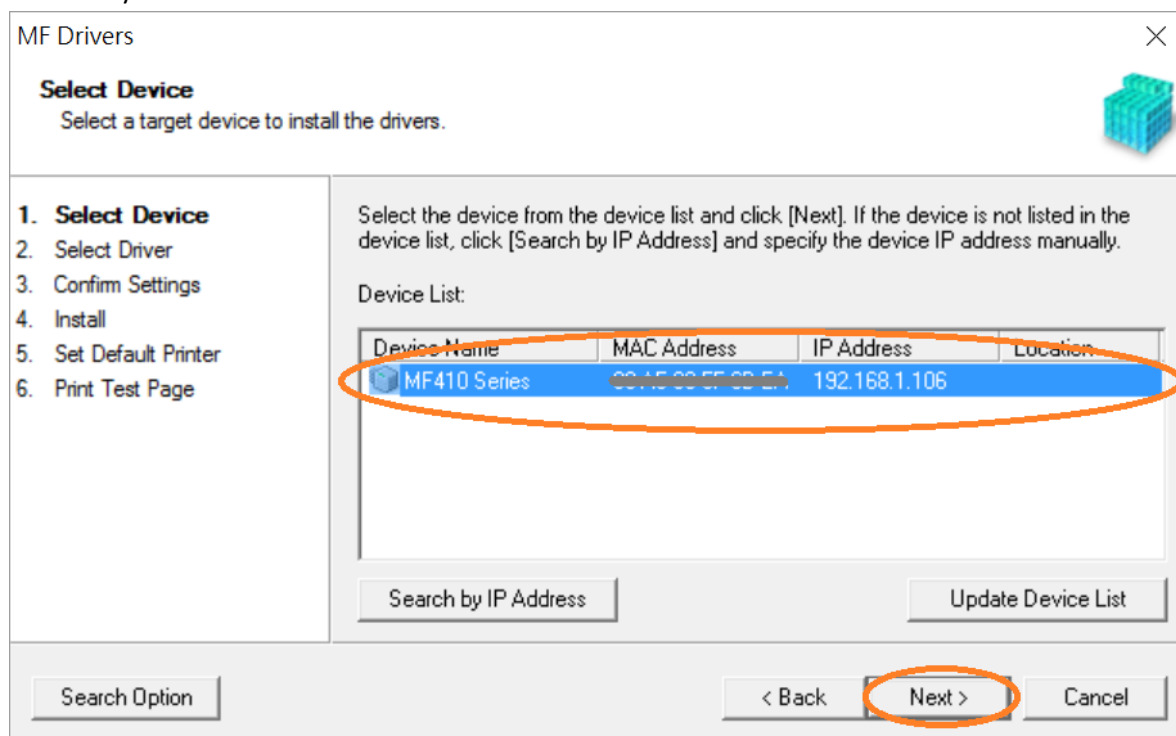

19. 確認已剔選「Printer」、「Fax (for Supported Models)」、「Scanner」（以 MF410 Series 為例子），按「Next >」

Confirm the “Printer” “Fax for Supported Models” “Scanner” box is checked(MF410 Series as example), click “Next >”

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

Target Device
MF410 Series

Driver to Install:

Printer
 Fax (for Supported Models)
 Scanner

Canon Driver Information Assist Service
When you install this service and use shared or local printers, functions that allow you to obtain device information will be added to your computer.

< Back **Next >** Cancel

20. 選擇「UFR II Printer Driver」（以 MF410 Series 為例子），按「Next >」

Select “UFR II Printer Driver” (MF410 Series as example), click “Next >”

MF Drivers

Select Driver
Select the drivers to install.

1. Select Device
2. **Select Driver**
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page


Target Device
MF410 Series

Printer Drivers to Install:

UFR II Printer Driver
 PCL6 Printer Driver
 PS3 Printer Driver

< Back **Next >** Cancel

21. 按「Next >」（以 MF410 Series 為例子）
Click “Next >” (MF410 Series as example)

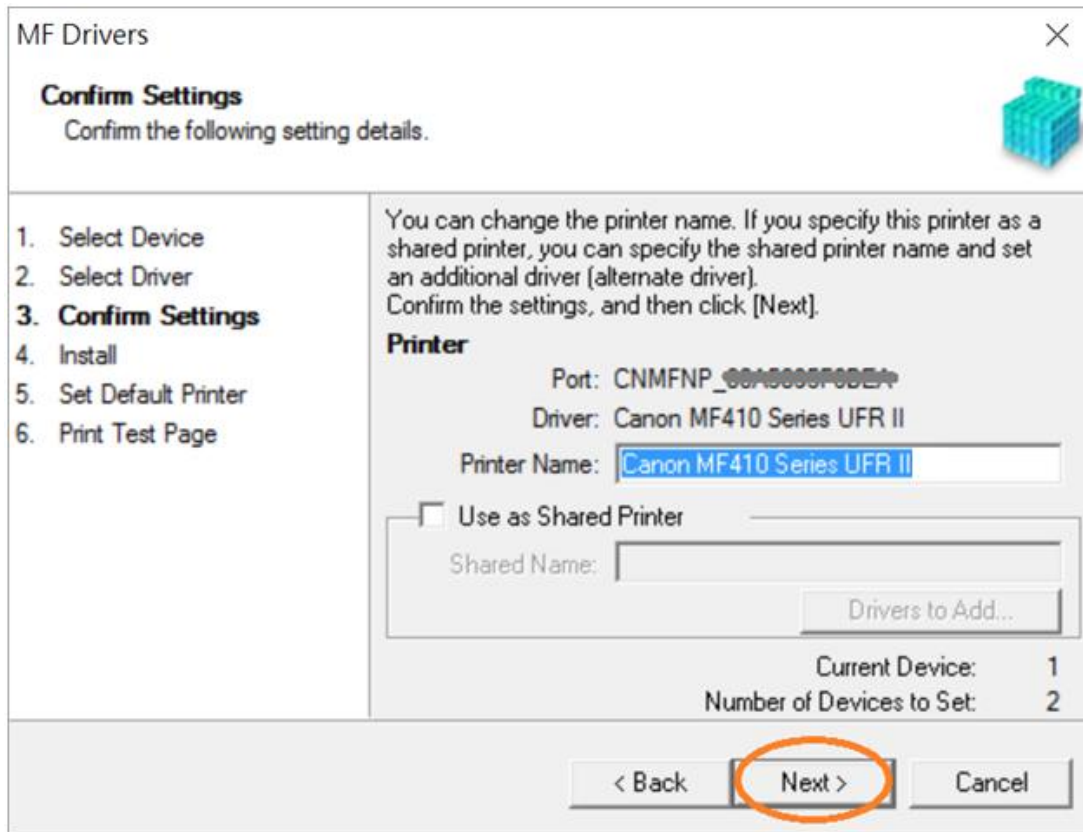

MF Drivers

Confirm Settings
Confirm the following setting details.

1. Select Device
2. Select Driver
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

You can change the printer name. If you specify this printer as a shared printer, you can specify the shared printer name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Printer

Port: CNMFNP_00A000F000E*

Driver: Canon MF410 Series UFR II

Printer Name: Canon MF410 Series UFR II

Use as Shared Printer


Shared Name:

Drivers to Add...

Current Device: 1
Number of Devices to Set: 2

< Back **Next >** Cancel

22. 按「Next >」（以 MF410 Series 為例子）
Click “Next >” (MF410 Series as example)

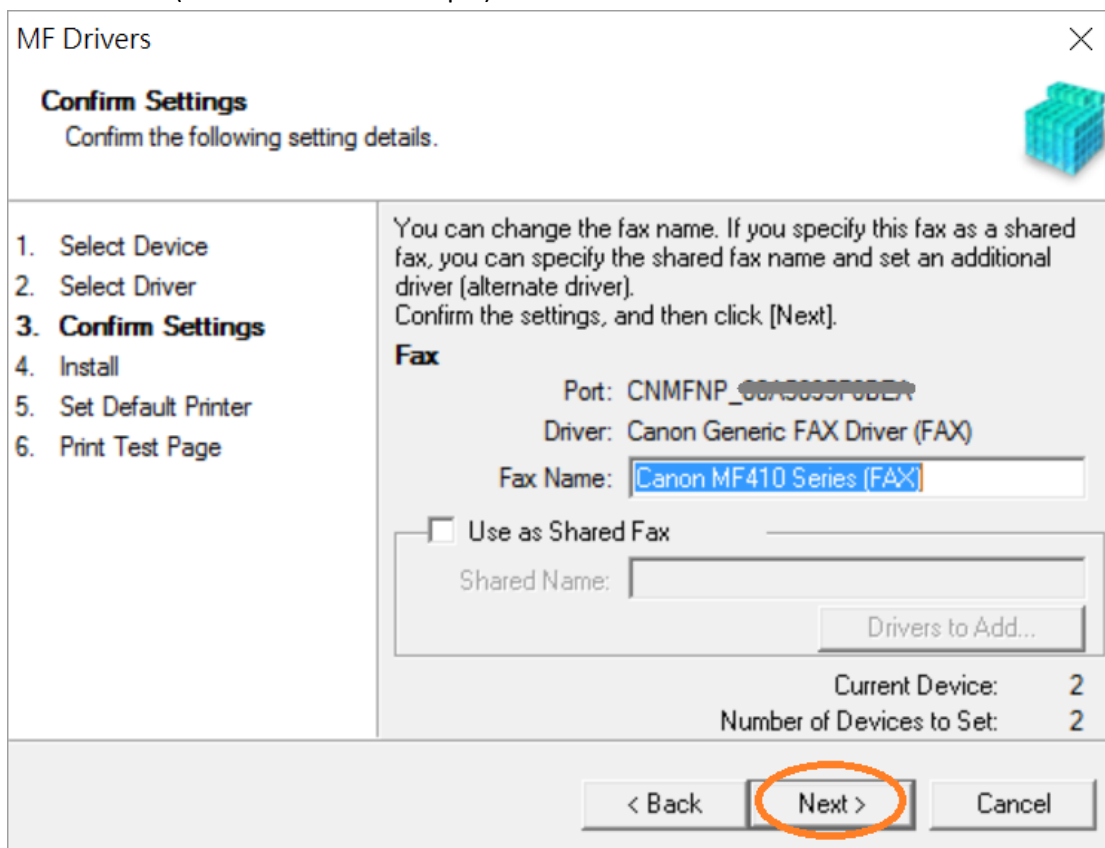

MF Drivers

Confirm Settings
Confirm the following setting details.

1. Select Device
2. Select Driver
3. Confirm Settings
4. Install
5. Set Default Printer
6. Print Test Page

You can change the fax name. If you specify this fax as a shared fax, you can specify the shared fax name and set an additional driver (alternate driver). Confirm the settings, and then click [Next].

Fax

Port: CNMFNP_00A000F000E*

Driver: Canon Generic FAX Driver (FAX)

Fax Name: Canon MF410 Series (FAX)

Use as Shared Fax


Shared Name:

Drivers to Add...


Current Device: 2
Number of Devices to Set: 2

< Back **Next >** Cancel


23. 按「Start」（以 MF410 Series 為例子）
Click “Start” (MF410 Series as example)

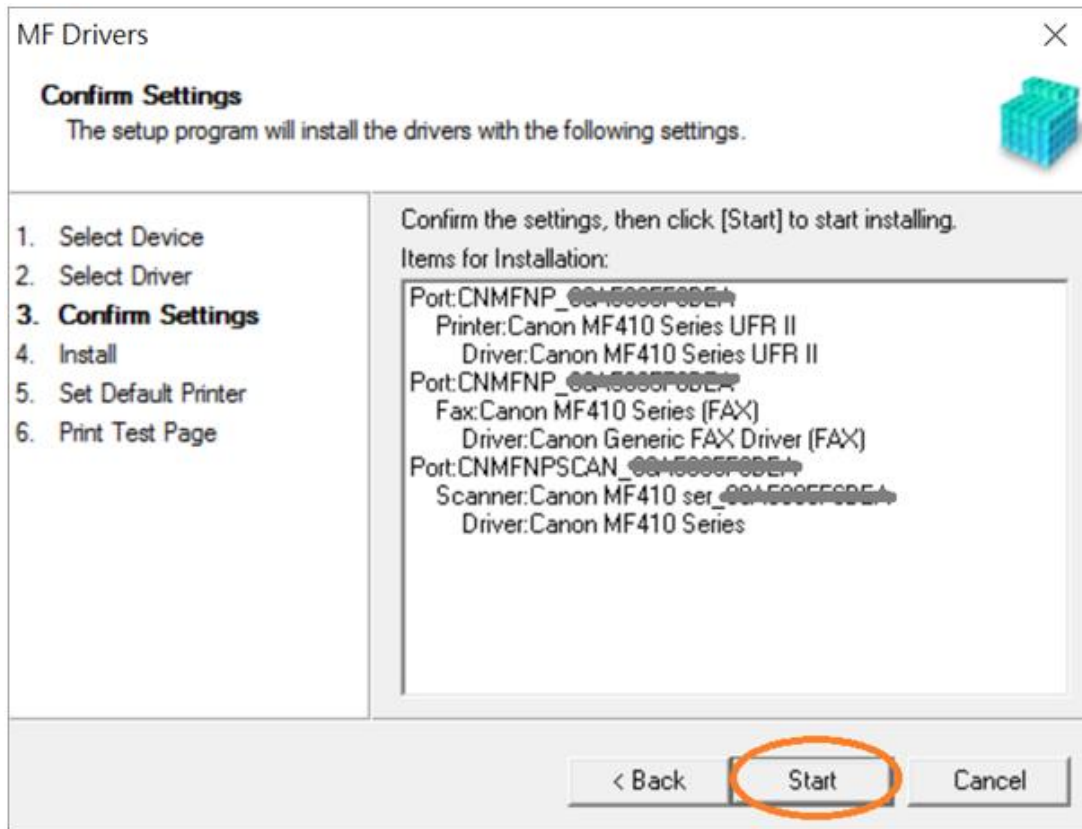


24. 請等待安裝精靈成完安裝
Please wait for the setup wizard to accomplish installation

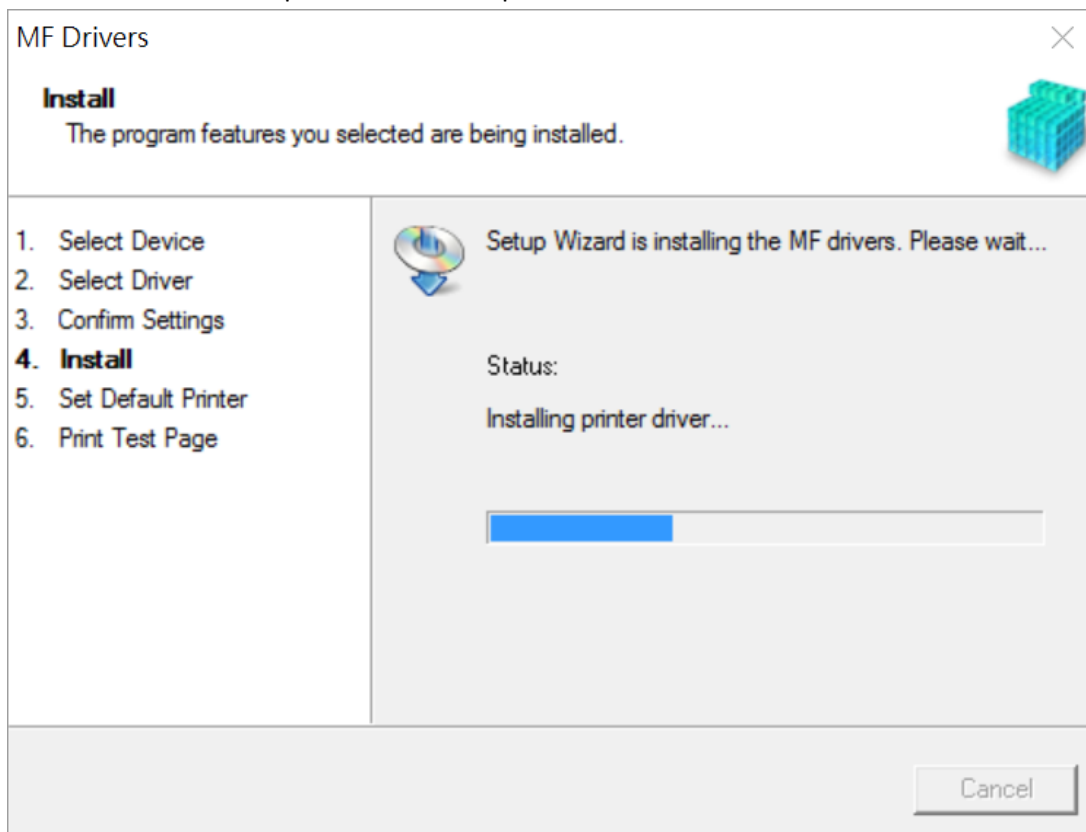

25. 選擇「Installed Printer: Canon MF420 Series UFR II」（以 MF410 Series 為例子），按「Next >」
Select "Installed Printer: Canon MF420 Series UFR II" (MF410 Series as example), click "Next >"

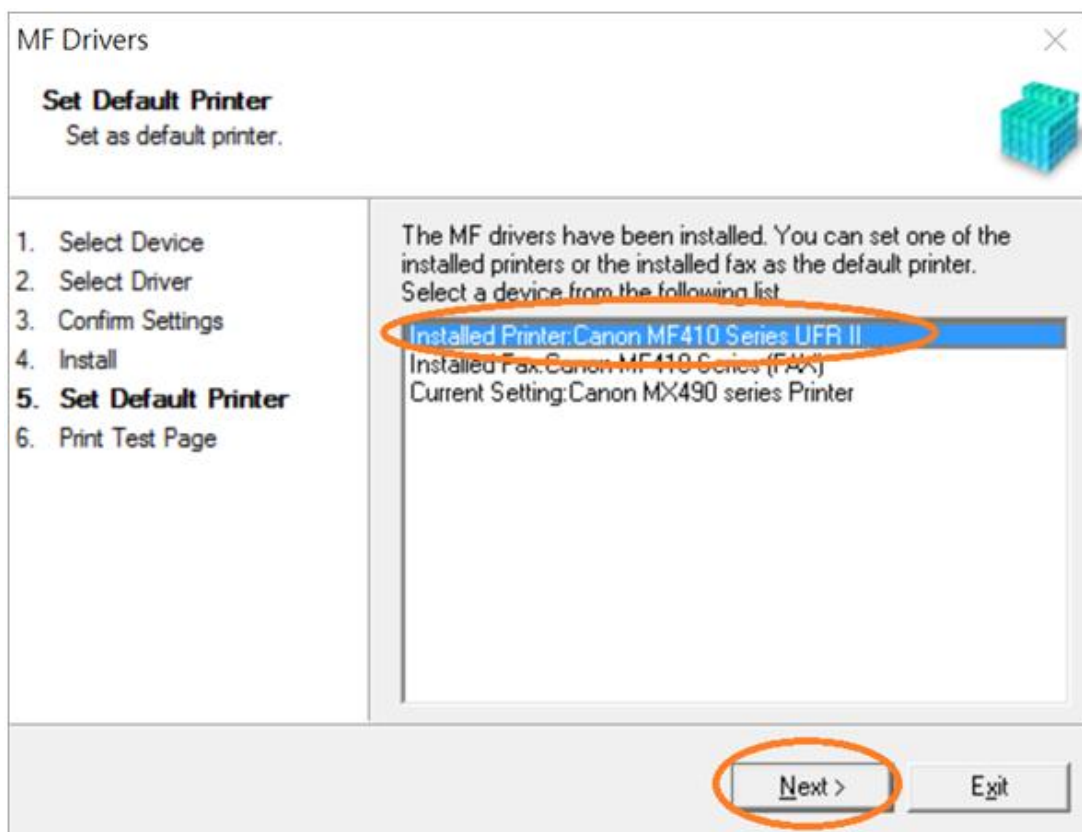


26. 可剔選「Printer: Canon MF420 Series UFR II」以（MF410 Series 為例子）進行列印測試頁，按「Exit」
Can check the box at "Printer: Canon MF420 Series UFR II" (MF410 Series as example) to print a test page, click "Exit"

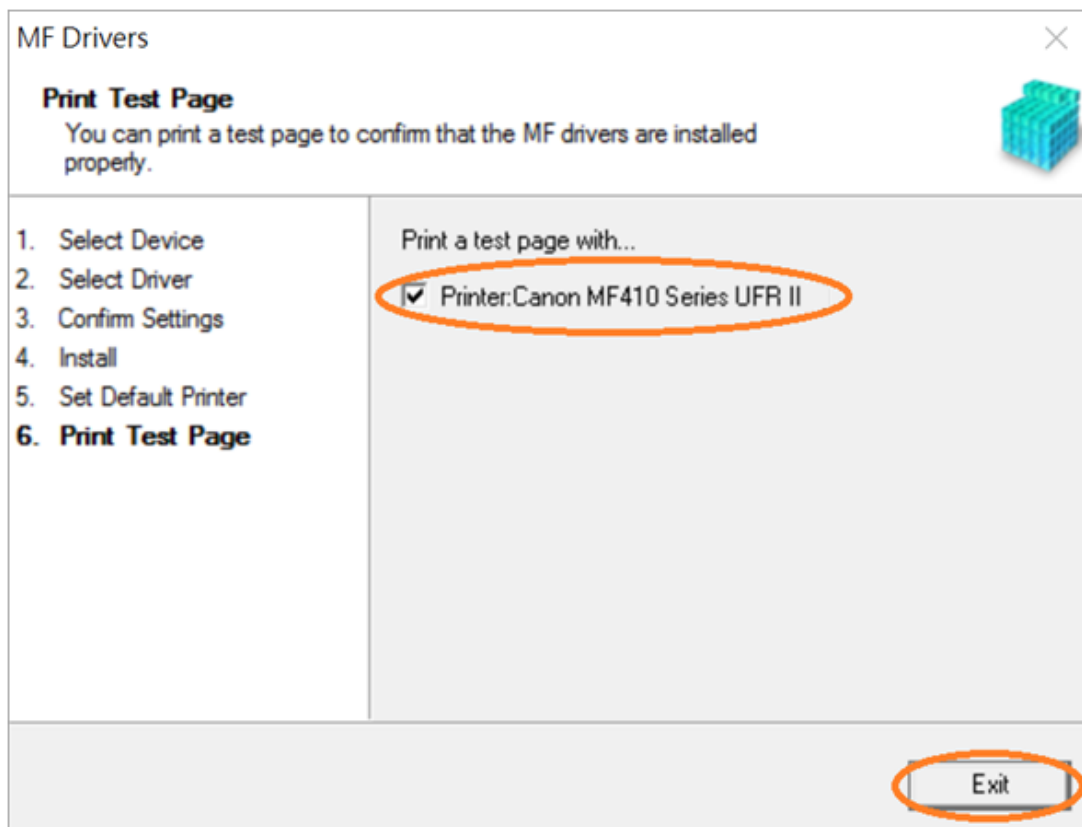


安裝掃描軟件MF Scan Utility MF Scan Utility installation procedure

27. 執行檔案〔winmfscanutilityvxxxx.exe〕按「Next」
Run the file [winmfscanutilityvxxxx.exe] , click “Next”

28. 按「Next >」
Click “Next >”

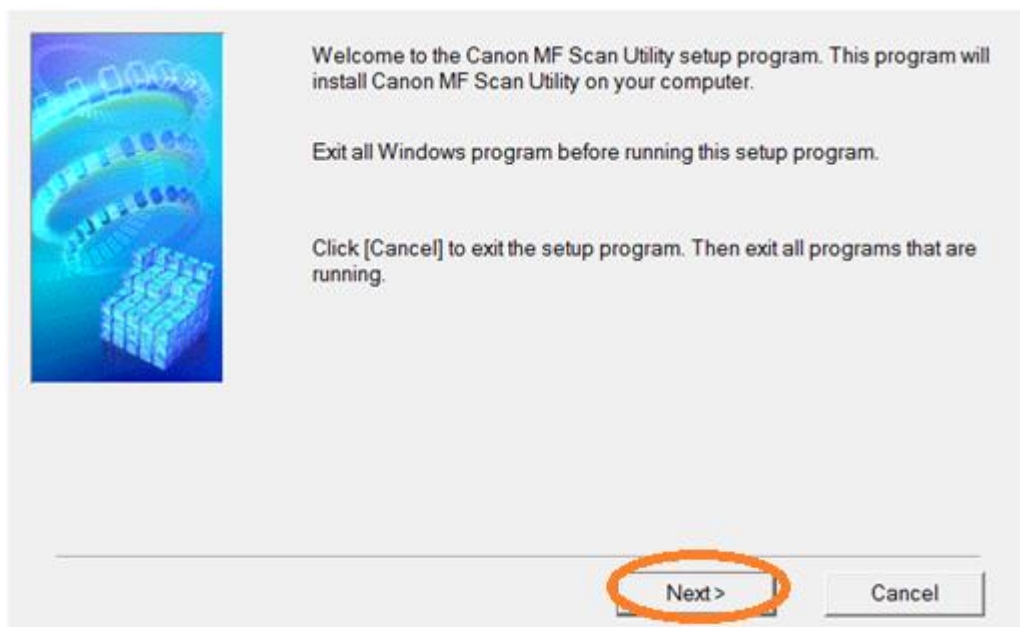

29. 按「Yes」
Click “Yes”

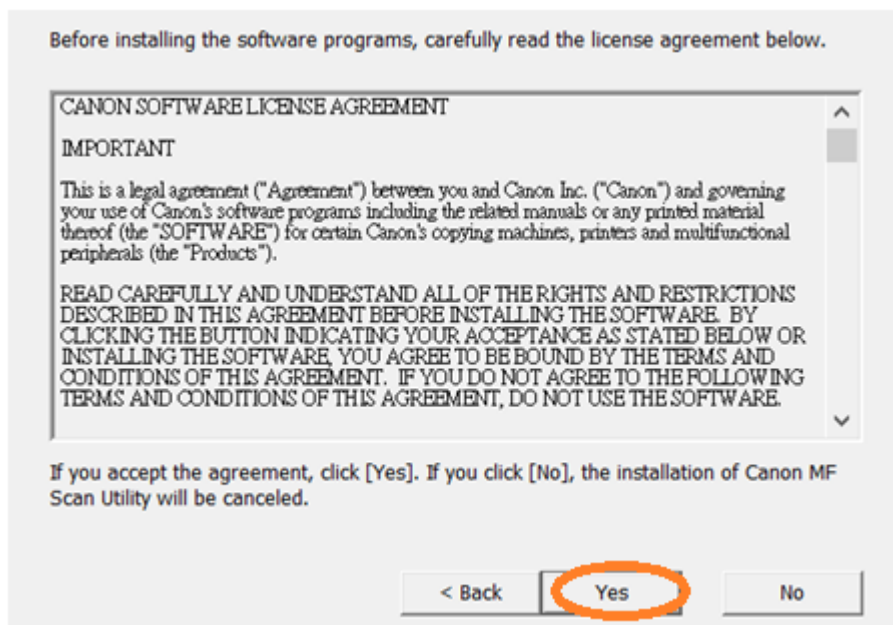


30. 等待安裝程序完成

Waiting for the installation progress


Install

C:\... \MF Scan Utility\jcutd40.dll



31. 按「Complete」

Click "Complete"

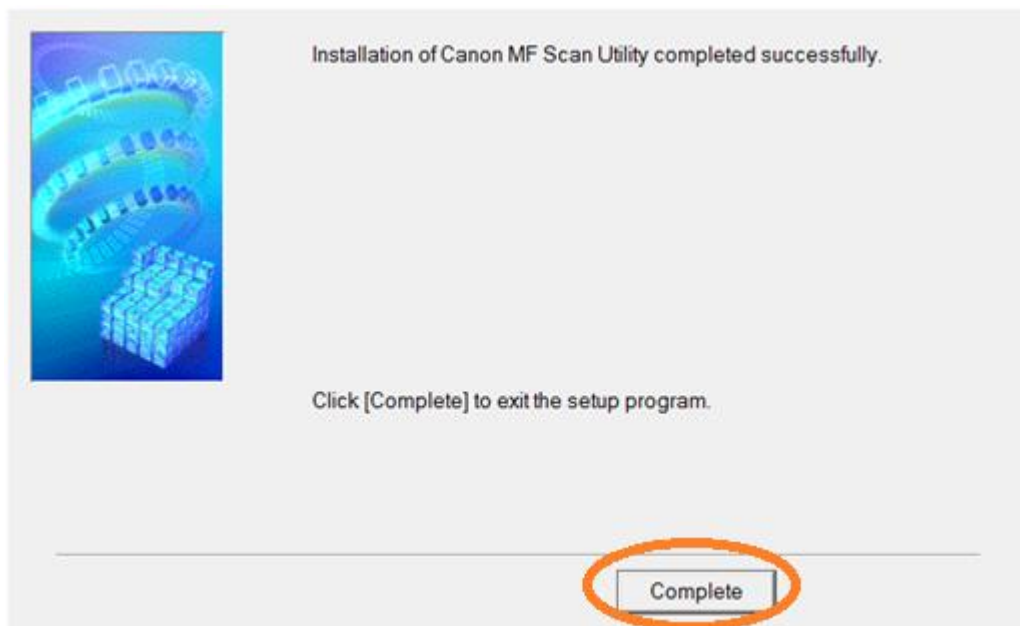

-完-

-End-