

MF441dw / MF445dw / MF449x 在 MAC OSX 透過無線 LAN 連線連接印表機之驅動程式步驟 **Driver installation procedure for MF441dw / MF445dw / MF449x in MAC OSX (Via Wi-Fi)**

先將打印機連接到網路，詳細可參考以下步驟

Connect printer to network router first, refer to following procedure

1. 開啟印表機
Switch on the Printer
2. 在主畫面中點選「功能表」
Tap “Menu” in the Home Screen
3. 點選「參數選擇」，再點選「網路」
Tap “Preferences”, then tap “Network”
4. 點選「無線區域網路設定」
Tap “Wireless LAN Settings”
5. 點選 <SSID 設定>
Tap “SSID setting”
6. 點選 <選擇存取點>
Tap “Select Access Point”
7. 選擇無線區域網路路由器，選擇與您記下的 SSID 相符的路由器
Select the router who's SSID matches the one that you have written down



8. 使用數字鍵輸入網路金鑰（路由器密碼），然後點選 <套用>
Enter the network key using the numeric keys, and tap “Apply”
9. 點選 <是>
Tap “Yes”

設定完成時，會顯示「已連線」

Wait until message “Connected” is displayed 等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until the IP address settings of the machine are completed

下載及安裝步驟

Driver download and installation procedure

10. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF449x/model>，下載印表機的驅動程式
Go to: <https://hk.canon/en/support/imageCLASS%20MF449x/model>, then download the printer driver

11. 選擇並下載以下檔案

Choose and download below files

- 打印機驅動程式 / Printer Driver

[UFR II/UFR II LT Printer Driver & Utilities for Macintosh VXXXXXX](#)


- 傳真驅動程式 / FAX Driver

[Fax Driver & Utilities for Macintosh VXXXXXX](#)

- 掃描器驅動程式 / Scanner Driver

[Scanner Driver & Utilities for Macintosh VXXXXXX](#)

12. 下載完成後開啟檔案〔 mac-UFR II-vXXXXXX.dmg 〕，按「 MF_Printer_Installer.pkg 」
Open the downloaded file〔 mac-UFR II-vXXXXXX.dmg 〕, press “MF_Printer_Installer.pkg”

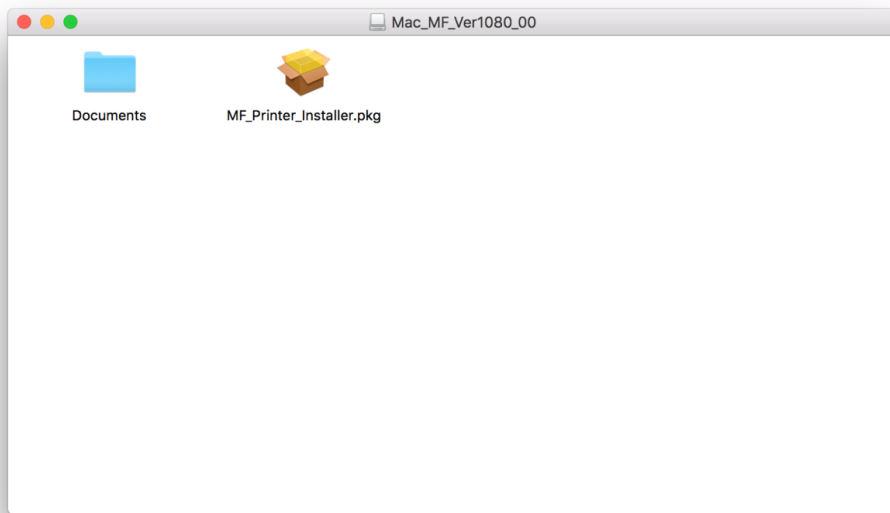

13. 按「繼續」
Choose “Next”




14. 按「繼續」然後按「同意」
Choose “Next” and then choose “Agree”



15. 按「安裝」
Choose “Install”




16. 等待安裝程序完成
Waiting for the installation progress

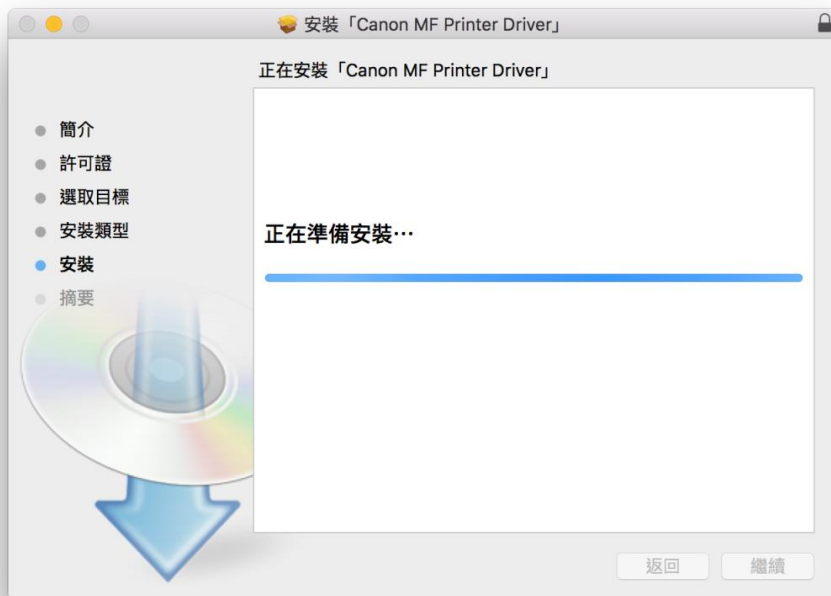

17. 按「關閉」
Choose "Close"



18. 開啟檔案〔 mac-fax-vXXXXXX.dmg 〕，按「 Canon_FAX_Installer.pkg 」
Open the file〔 mac-fax-vXXXXXX.dmg 〕，press “Canon_FAX_Installer.pkg”)

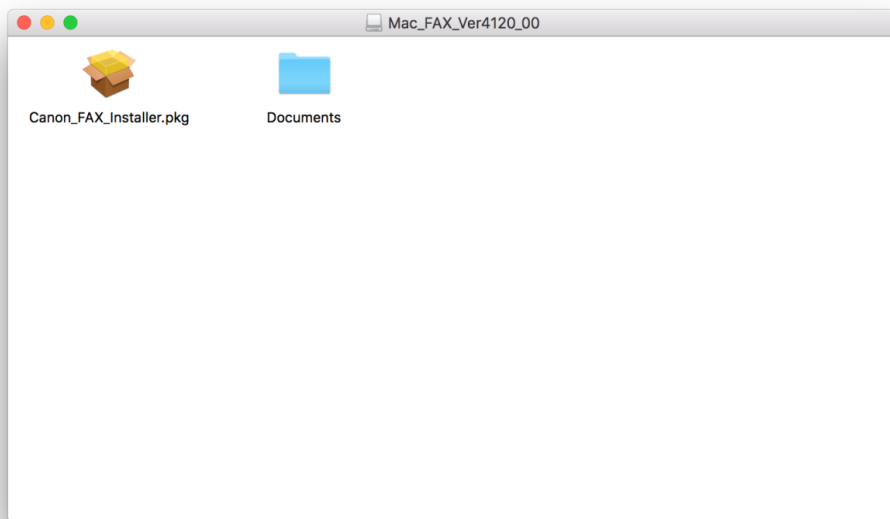


19. 按「繼續」
Choose “Continue”




20. 按「繼續」然後按「同意」
Choose “Continue” and then choose “Agree”



21. 按「安裝」
Choose “Install”

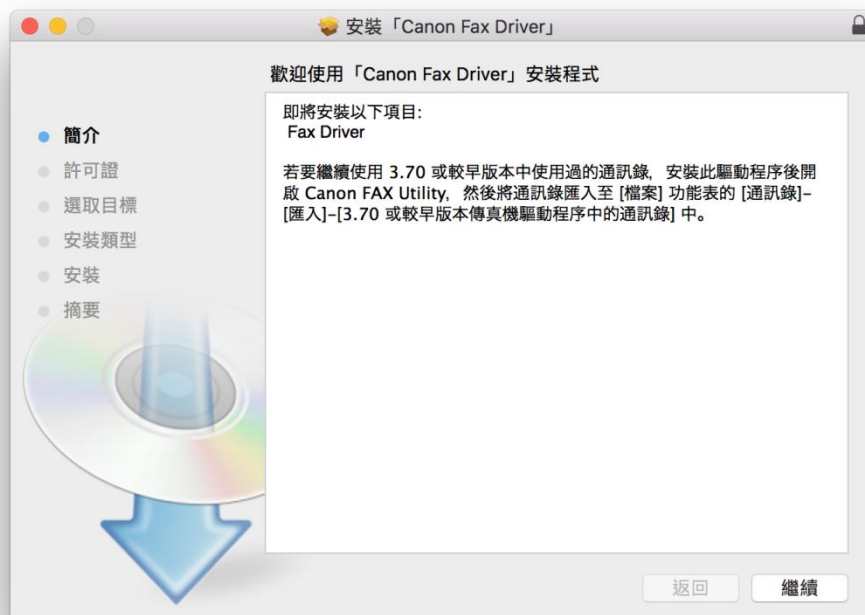


22. 等待安裝程序完成
Waiting for the installation progress

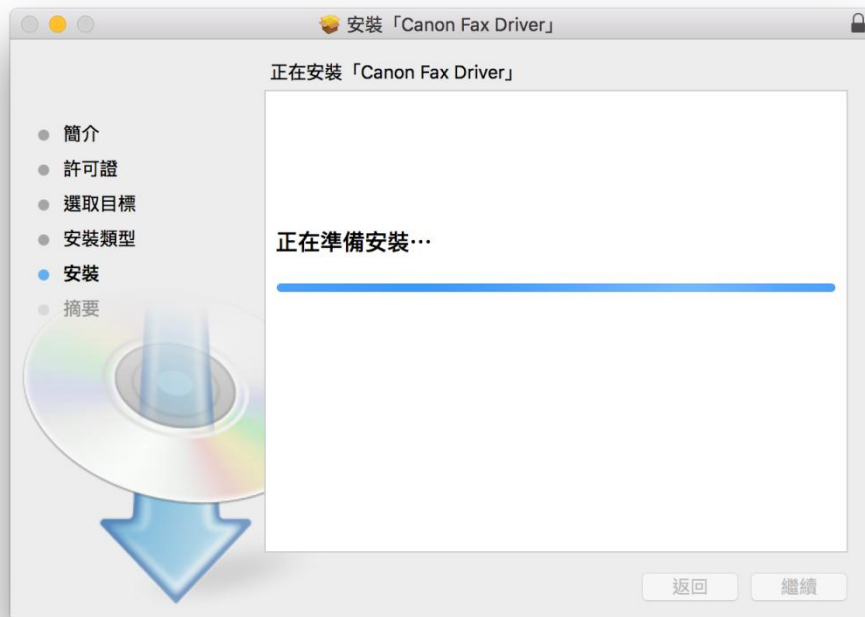

23. 按「關閉」
Choose "Close"



24. 開啟檔案〔 mac-scan-vXXXXXX.dmg 〕，按「Canon_ScanGear_MF.pkg」
Open file〔 mac-scan-vXXXXXX.dmg 〕，press “Canon_ScanGear_MF.pkg”

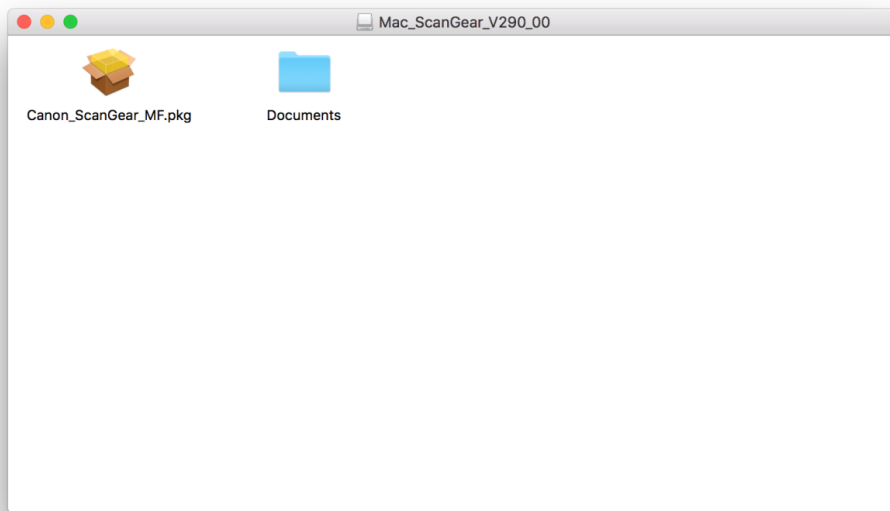


25. 按「繼續」
Choose “Continue”



26. 按「繼續」然後按「同意」
Choose “Continue” and then choose “Agree”




27. 按「安裝」
Choose “Install”

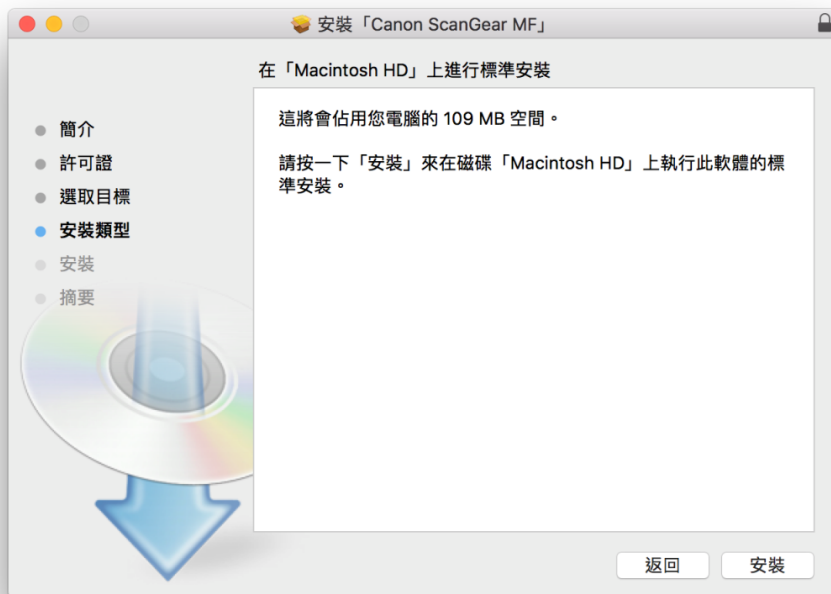

28. 等待完成安裝 程序
Waiting for the installation progress



29. 按「關閉」
Choose "Close"

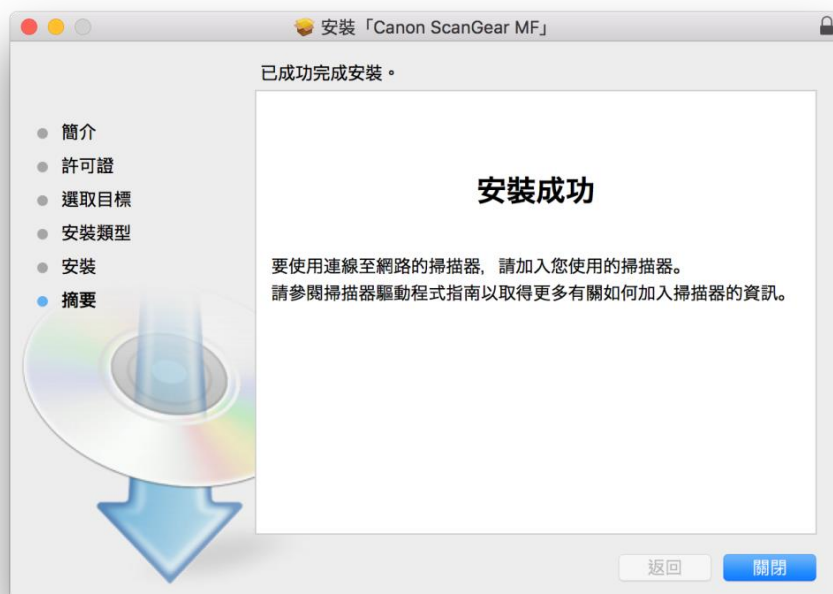

30. 完成安裝驅動程式後需新增印表機，到「系統偏好設定」，選「印表機與掃描器」 Go to “System Preferences” and open “Printer and Scanner”




31. 選取左下角「+」按鈕，選「加入印表機或掃描器」
Click the “+” button and select “Add printer or Scanner”




32. 名稱選擇「Canon MF440 Series」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF440 Series」按「加入」，新增印表機驅動程式

Choose the Name “Canon MF440 Series” with “Bonjour multifunction”, and confirm selected “Canon MF440 Series” in “Use”, then click “Add”

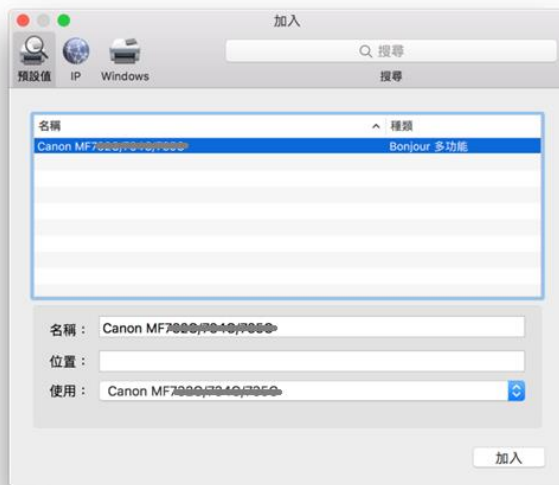


33. 再一次按左下角「+」按鈕，選「加入印表機或掃描器」，名稱選擇「Canon MF440 Series」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF440 Series FAX」按「加入」，新增傳真驅動程式


Click the “+” button and select “add printer or scanner”, choose the name “Canon MF440 Series” with “Bonjour multifunction”, and confirm selected “Canon MF440 Series FAX” in “Use”, then click “Add”

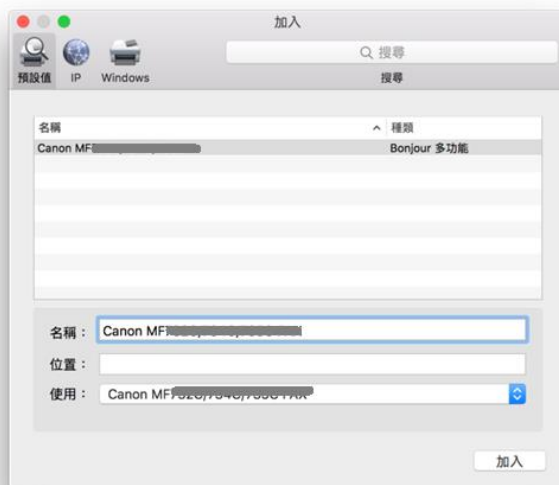

34. 網絡掃描需新增掃描器到 MF Scan Utility，到應用程式 > Canon MF Utilities 開啟 MF Scan Utility，第一次開啟時會出現下圖錯誤字句，網路掃描器視窗會自動開啟，按左下角「+」號新增掃描器
A network scanner need to add into MF Scan Utility, go to “Application “-> “Canon MF Utilities” and run the MF Scan Utility, below error message will show when first time launch, network Scanner Setting windows open automatic, click the “+” button add scanner

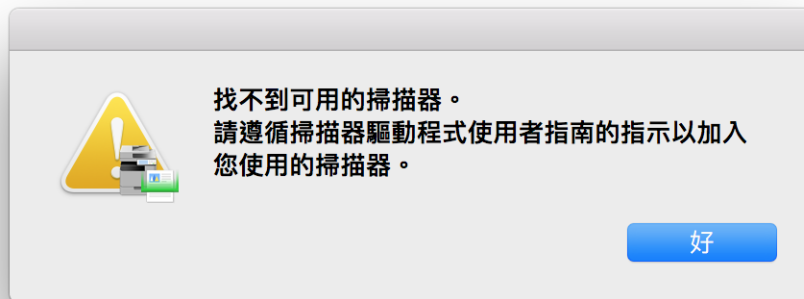

35. 選擇「Canon MF440 Series」，按「新增」
Choose “Canon MF440 Series” and then click “Add”

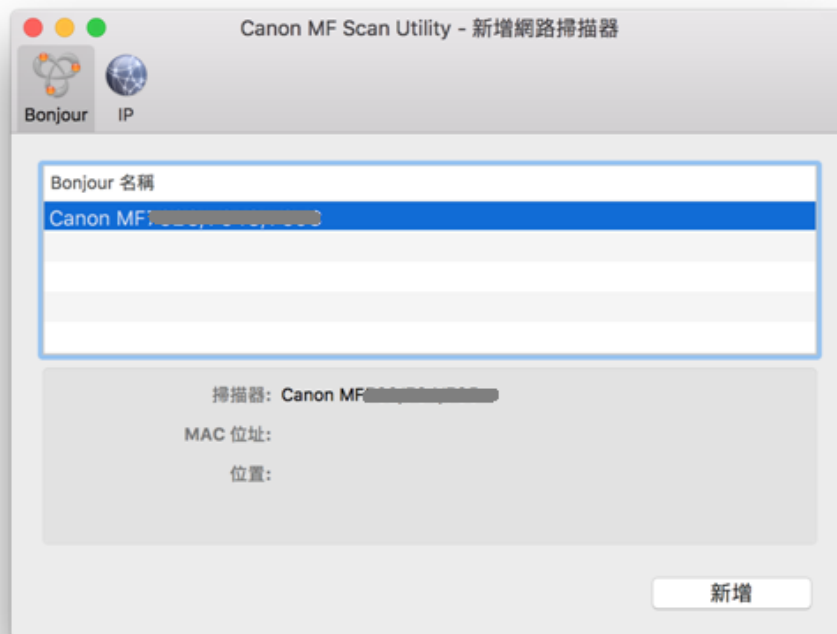

36. 完成以上設定後已可使用印表機作打印、傳真及掃描功能
Setup completed. Print, fax and scan functions are ready to use

-完-
-End-