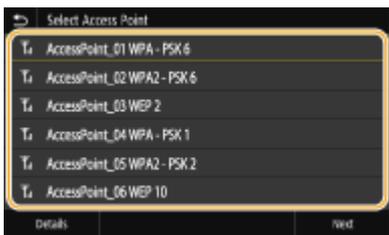


## LBP664Cx 在 Windows 透過 WIFI 連線連接印表機之驅動程式步驟 Driver installation procedure for LBP664Cx in Windows (Via WIFI)

先將打印機連接到路由器，詳細可參考以下步驟：

The Connection by selecting a wireless router:

1. 在首頁畫面中選擇 <功能表>。  
Select “Menu” in the Home Screen
2. 選擇「參數選擇」>「網路」  
Select “Preference” > “Network”
  - 若顯示 PIN 碼輸入畫面，請使用數字鍵輸入 PIN 碼，然後點選「套用」
  - If a screen for entering a PIN is displayed, enter the PIN with the numeric keys and tap “Apply”
3. 選「無線區域網路設定」  
Select “Wireless LAN Settings”
4. 閱讀顯示訊息後按“OK”  
Read the message that is displayed, and select “OK”.
5. 選「SSID 設定」  
Select “SSID setting”
6. 選「選擇存取點」  
Select “Select Access Point”
7. 選擇無線區域網路路由器  
Select the router SSID  


The screenshot shows a 'Select Access Point' dialog box with a list of six wireless networks. Each entry includes a signal strength icon, a lock icon, and the network name and security type: AccessPoint\_01 WPA - PSK 6, AccessPoint\_02 WPA2 - PSK 6, AccessPoint\_03 WEP 2, AccessPoint\_04 WPA - PSK 1, AccessPoint\_05 WPA2 - PSK 2, and AccessPoint\_06 WEP 10. At the bottom, there are 'Details' and 'Next' buttons.
8. 輸入您記下的網路鍵值  
使用數字鍵輸入網路金鑰(路由器密碼)，然後點選「套用」  
Enter the network key using the numeric keys, and select “Apply”
9. 點選「是」  
Select “yes”
10. 等待直至顯示<已連接>，選<關閉>  
Wait until message <Connected.> is displayed. Select <Close>

## 下載及安裝步驟

### Driver download and Installation procedure

11. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20LBP664Cx/model>，下載印表機的驅動程式

Go to: <https://hk.canon/en/support/imageCLASS%20LBP664Cx/model>, download the printer driver

12. 選擇並下載以下檔案


Choose and download below file:

- 打印機驅動程式 / Printer Driver

**[Windows x64] Generic Plus UFR II Printer Driver Vx.xx**


13. 下載的文件以自解壓縮檔檔案(.exe 格式)保存在指定的文件夾中，打開文件解壓縮。將在同一文件夾中創建新文件夾。新文件夾的名稱與解壓縮文件的名稱相同，進入新文件夾開啟「Setup.exe」開始安裝

Open the downloaded file, a same name new folder will be created. Go into new folder open "Setup.exe" start installation"

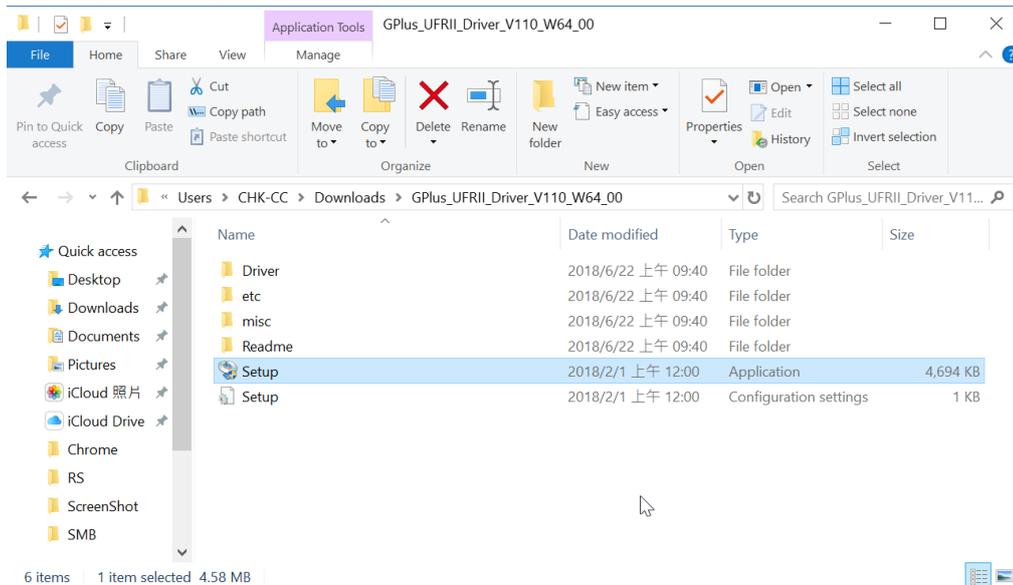


14. 選擇語言 (Language) , 然後按 「Next」

Select Language, press "Next"

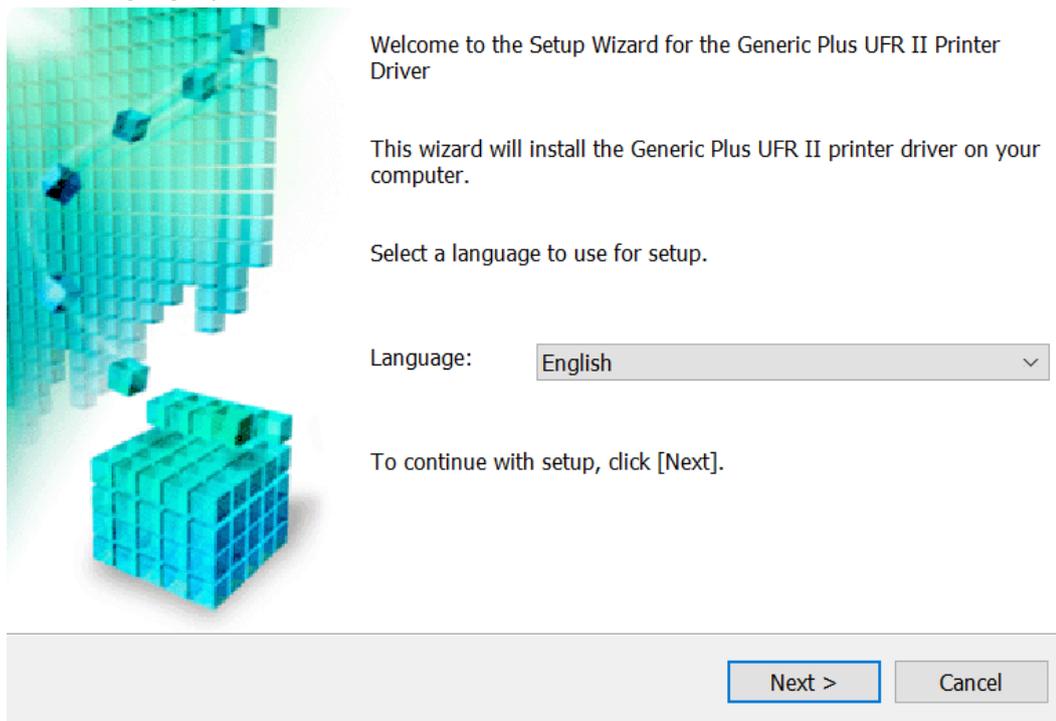

15. 選擇 「Yes」

Choose "Yes"

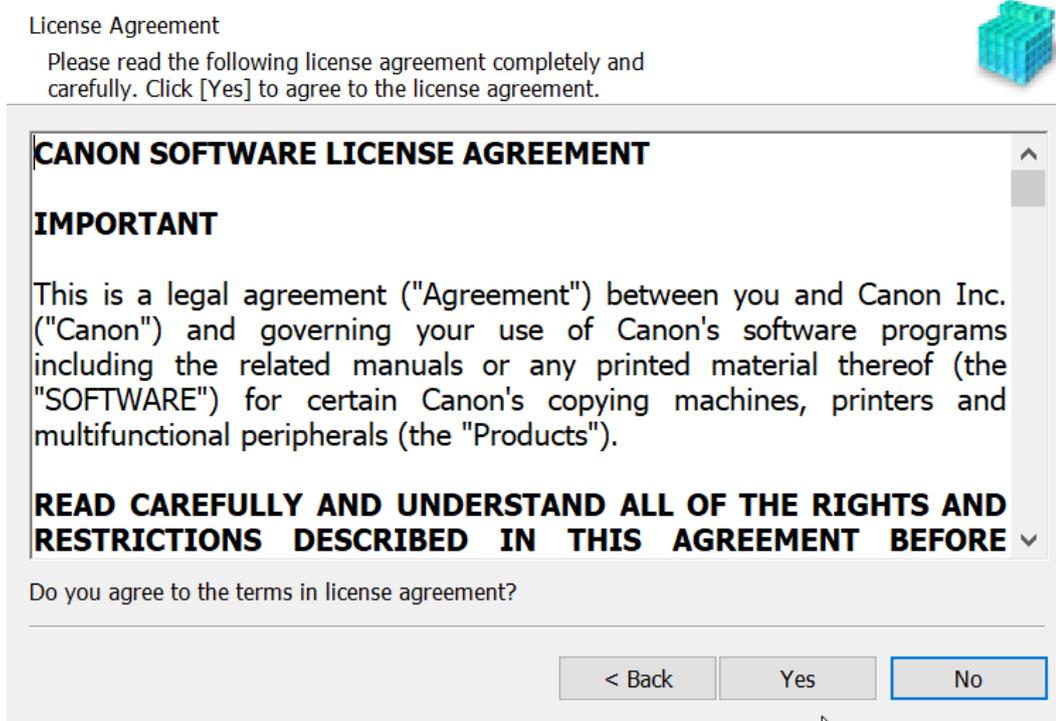

16. 選擇「Standard」，按「Next」  
Choose “Standard”, press “Next”

The Generic Plus UFR II printer driver will be installed on your computer.  
Select a setup method, and then click [Next].



Printer Setup



- Standard  
Search for printers on the network and install.  
 Reactivate Printers in the Sleep Mode and Search
- Custom  
Specify a port or an IP address manually to install drivers of local or network printers.  
You can also specify other settings, such as setting a printer as a shared printer.
- USB Connection  
Connect the printer with a USB cable and install.

Display Readme File      < Back      Next >      Cancel

17. 按「Next」  
Press “Next”

Select Process  
Select the items to install and the process to install the printer driver.




UFR II Printer Driver


Canon Driver Information Assist Service  
By installing this service, you will be able to retrieve device information and perform Department ID Management and User Authentication from your computer when using shared printers.

< Back      Next >      Cancel

18. 等待搜尋印表機  
Wait for searching printer

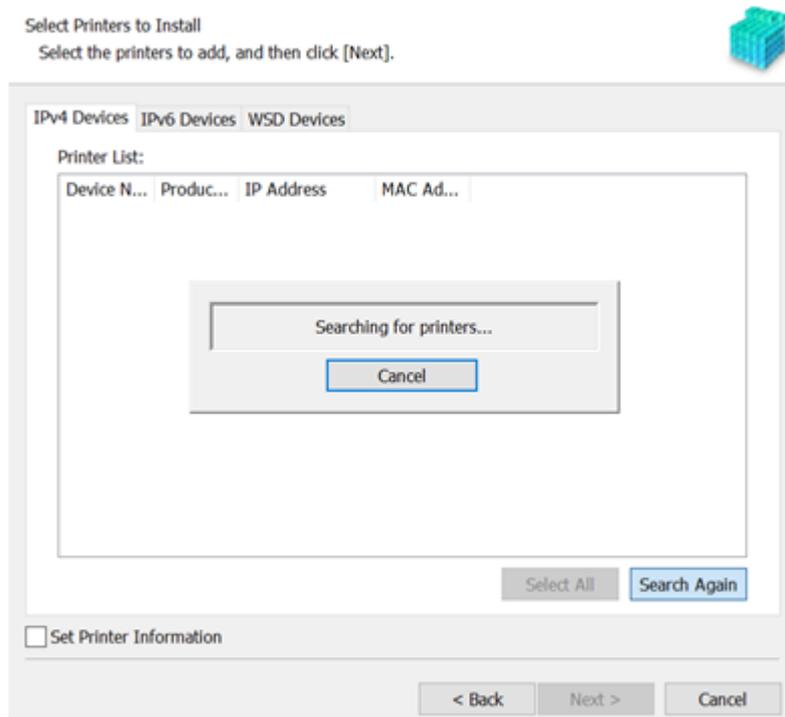


19. 勾選「LBP660 Series」，按「Next」  
Select "LBP660 Series", press "Next"

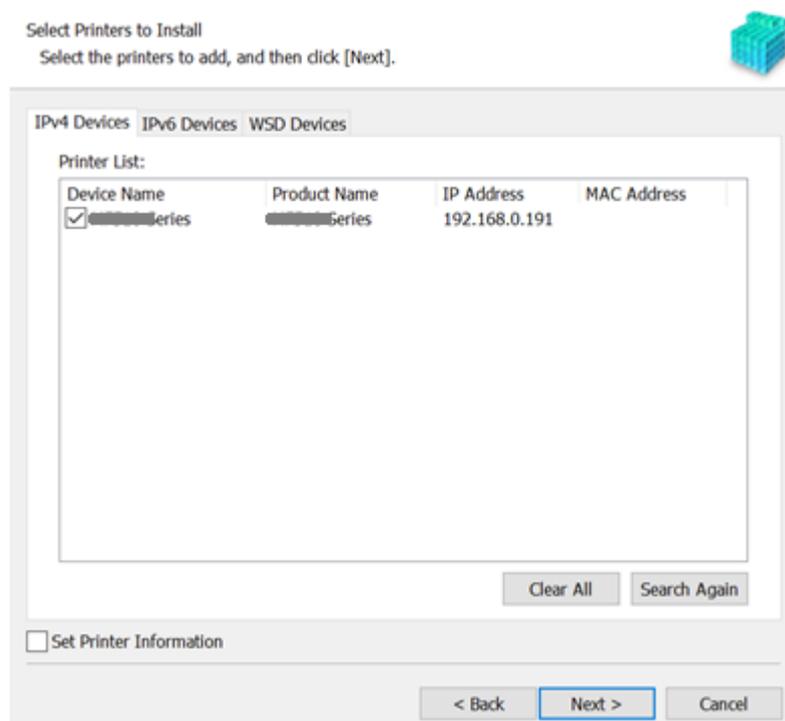

20. 確定印表機資料，按「Start」  
Confirm printer information, press “Start”


The setup program will install the drivers with the following settings.  
\* Installation cannot be canceled once started.

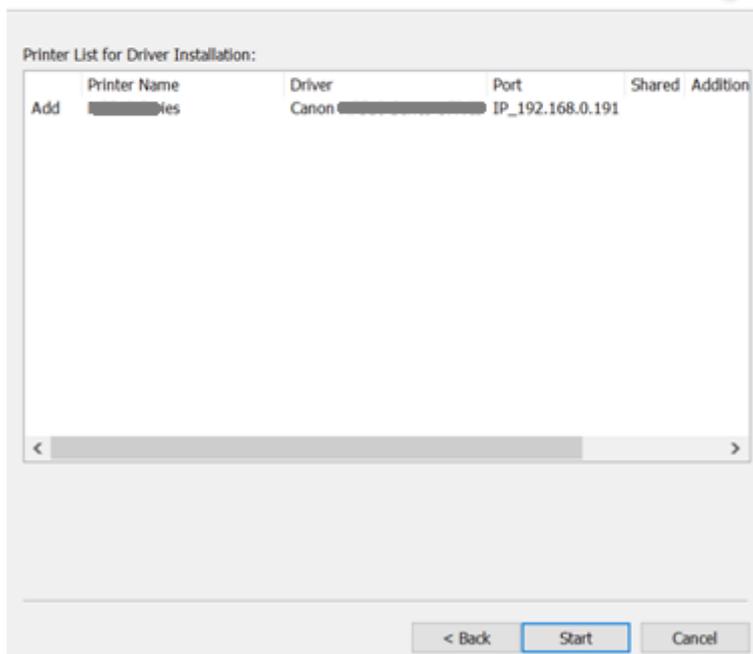


21. 等待安裝程序完成  
Waiting for the installation progress

Installing...

The program features you selected are being installed.

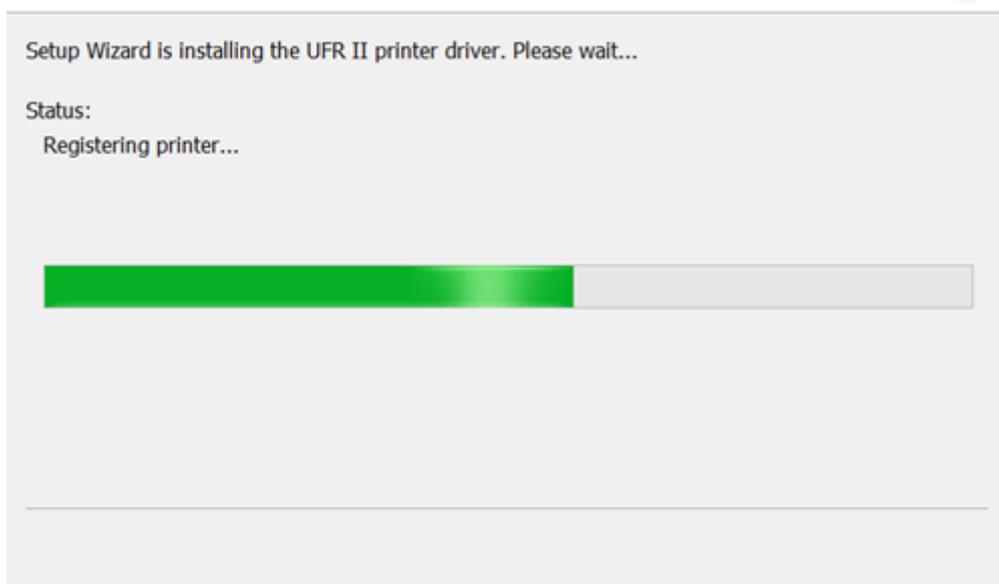

22. 按「Exit」完成安裝  
Click "Exit" to finish installation

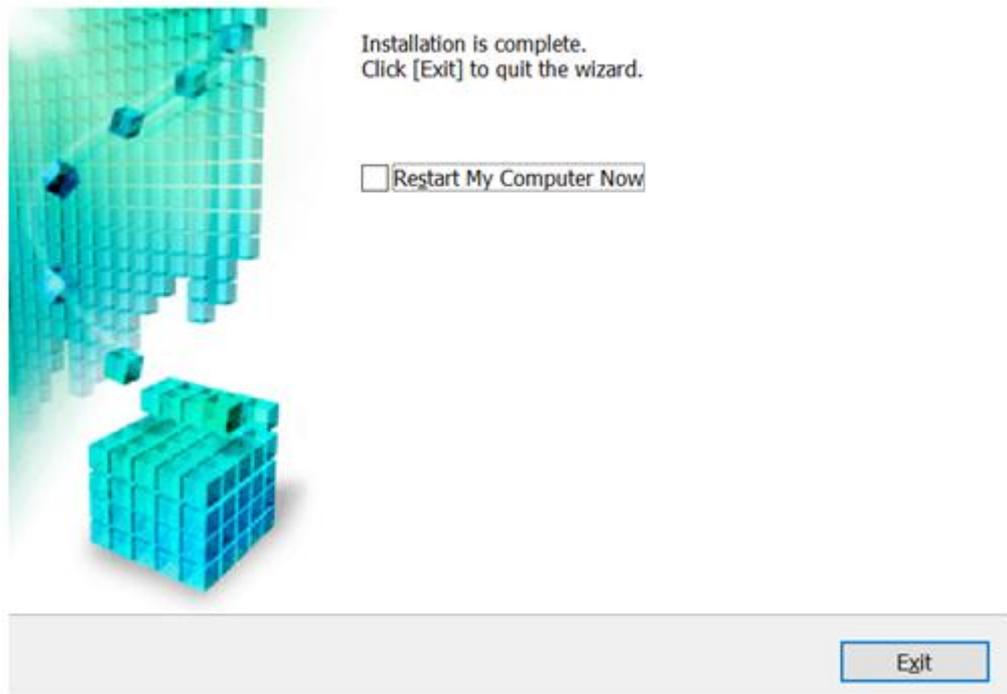

-完-  
-End-