

MF645Cx – 掃描至SMB

MF645Cx – Scan To SMB

1. 確認印表機電源已開啟及已完成[網絡連線設定](#)

Confirm the printer is powered on and completed the [network connection settings](#)


2. 在首頁中按「狀態確認」

Tap “Status Monitor” on the home screen




3. 按「網路資訊」

Tap “Network Information”

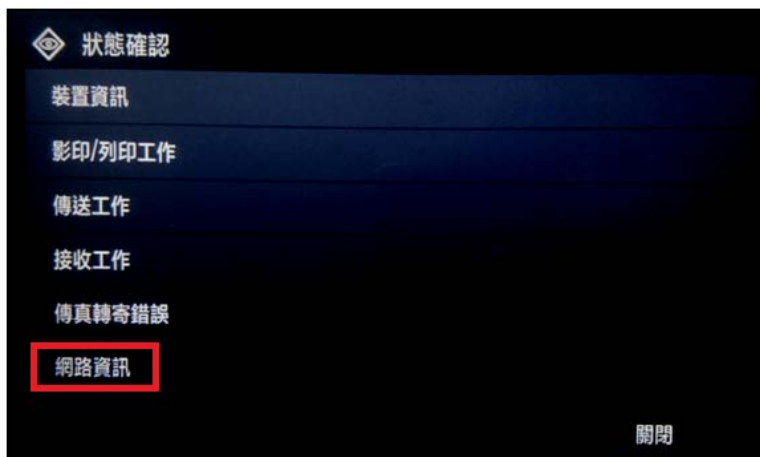

4. 按「IPv4」

Tap “IPv4”

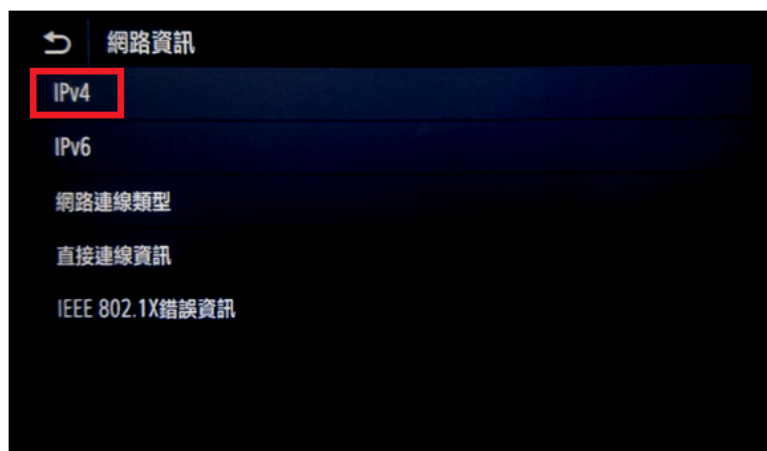

5. 檢查 IP 位址

Check the IP Address




6. 設定共用資料夾及其權限（Windows請[按此](#)參考；Macintosh請[按此](#)參考）

Setup shared folder and its access rights (Windows refers to [HERE](#); Macintosh refers to [HERE](#))

7. 在電腦瀏覽器網址欄輸入印表機 IP 位址，以系統管理員模式登入遠端控制台（如已設定管理員識別碼及密碼，須在此輸入；預設皆為 7654321）

Type the IP address in the address bar of internet browser, login with System Manager Mode (Enter the System Manager ID and PIN if necessary; default for both are 7654321)

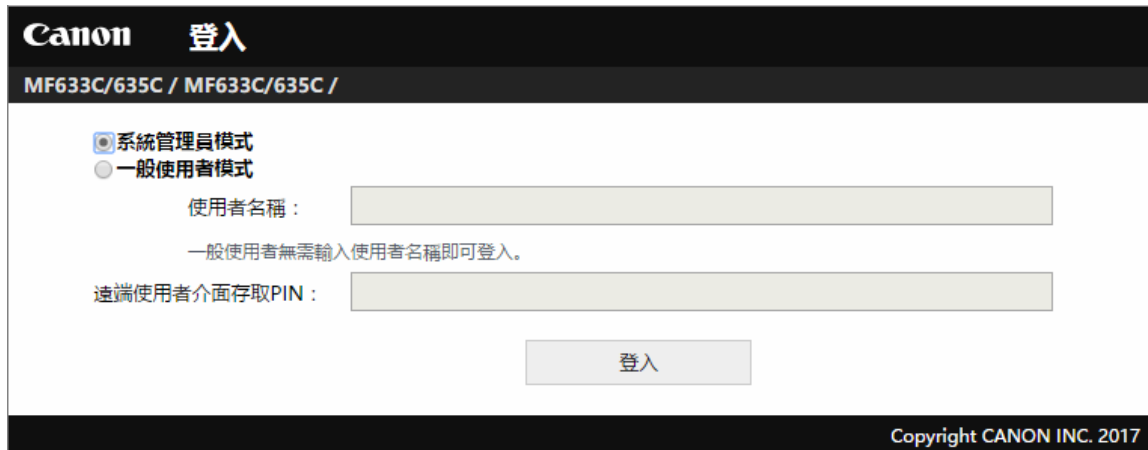

The image shows the Canon login page for the MF633C/635C printer. At the top, it says "Canon 登入" and "MF633C/635C / MF633C/635C /". Below this, there are two radio buttons: "系統管理員模式" (System Manager Mode) which is selected, and "一般使用者模式" (General User Mode). There are input fields for "使用者名稱:" (Username) and "遠端使用者介面存取PIN:" (Remote User Interface Access PIN). A note says "一般使用者無需輸入使用者名稱即可登入。" (General users do not need to enter a username to log in). There is a "登入" (Login) button at the bottom. The footer says "Copyright CANON INC. 2017".

8. 按「通訊錄」

Click "Address Book"



The image shows the imageCLASS remote user interface. At the top, it says "imageCLASS" and "裝置名稱: MF633C/635C", "產品名稱(序號): MF633C/635C", and "位置:". There is a "登出" (Logout) button. Below this, it says "遠端使用者介面: 入口網站" and "Language: Chinese (Traditional)". There is a "致系統管理員郵件" (Email System Administrator) button. The main content area shows "最近更新: 27/04 2017 04:23:44 PM". On the left, there are sections for "裝置基本資訊" (Device Basic Information), "裝置狀態" (Device Status), "錯誤資訊" (Error Information), and "消耗品資訊" (Consumables Information). On the right, there are buttons for "狀態確認/取消" (Status Confirmation/Cancellation), "設定/註冊" (Settings/Registration), "通訊錄" (Address Book), and "Application Library". The "通訊錄" button is highlighted with a red box.

9. 選擇任何一個「未註冊」的項目
Choose either one of “Not Registered”



10. 選擇「檔案」，然後按「確定」
Choose “File”, then click “OK”



11. 輸入名稱、主機名稱、資料夾路徑、使用者名稱及密碼，然後按「確定」

Enter the name, Host Name, Folder Path, User Name and Password, then click “OK”

The screenshot shows the 'imageCLASS MF645C / MF645C /' web interface. The top navigation bar includes 'imageCLASS', 'MF645C / MF645C /', '至入口網站', and '登出'. Below this is a '通訊錄' (Address Book) section with a '我的最愛' (Favorites) sidebar. The main content area is titled '註冊新接收者：檔案' (Register New Receiver: File). It contains a form with the following fields: '編號' (Number) set to '03', '名稱' (Name) set to 'Test', '通訊協定' (Protocol) set to 'Windows(SMB)', '主機名稱' (Host Name) set to '192.168.11.7', '資料夾路徑' (Folder Path) set to 'MySMB', and '使用者名稱' (User Name) set to 'Test'. There is a checkbox for '設定密碼' (Set Password) which is checked, and a password field with four dots. '確定' (OK) and '取消' (Cancel) buttons are at the top right of the form.

12. 在首頁按「掃描」

Press “Scan” in Home



13. 按「檔案」>「通訊錄」>「收件者」>選擇已註冊的檔案位置>「套用」>「黑白開始」／「彩色開始」

Press “Scan” > “File” > “Address Book” > “To” > Select registered SMB > “Apply” > “B&W Start” / Color Start”

-完-

-End-