


在 Mac OS 以無線方式安裝及連接 imagePROGRAF PRO-300 打印機（以 Mac OS 10.15 作示範）
Installing imagePROGRAF PRO-300 on Mac OS via WiFi connection (Use Mac OS 10.15 as example)


1. 確保在開始無線連接設定之前，印表機已開啟。
如果電源開啟，**電源(ON)**指示燈(A)將亮起。
Make sure printer is turned on before starting wireless connection setup.
If the power is on, the **ON** lamp (A) will be lit.



2. 按主頁(**HOME**)按鈕(B)。
Press the **HOME** button (B).

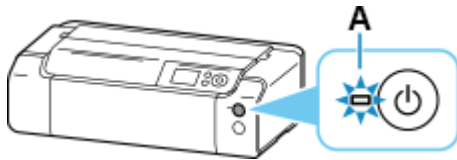


3. 使用 ▲或▼按鈕(A)選擇 **LAN 設定(LAN settings)**，然後按 **OK** 按鈕。
Use the ▲ or ▼ button (A) to select **LAN settings** and press the **OK** button.

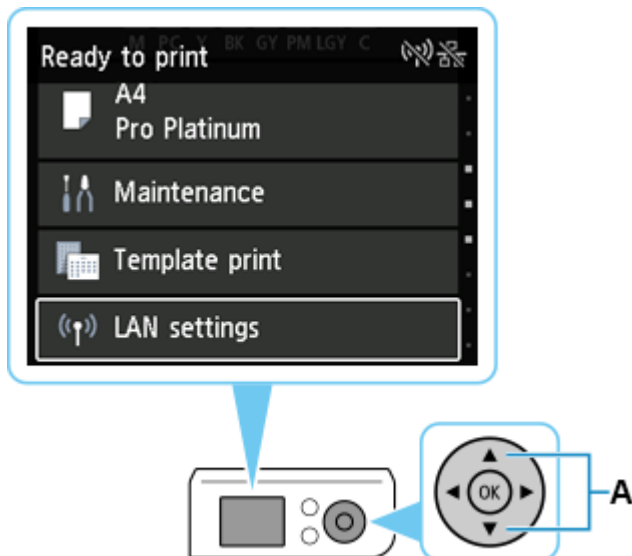

4. 選擇 **Wi-Fi** 並按 **OK** 按鈕。

Select **Wi-Fi** and press the **OK** button.

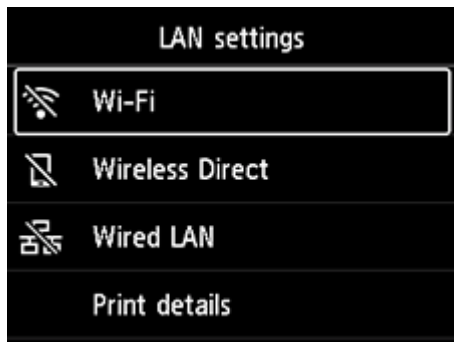


5. 選擇設定(Settings)並按 **OK** 按鈕。

Select **Settings** and press the **OK** button.




6. 選擇 **Wi-Fi 設定(Wi-Fi setup)**並按 **OK** 按鈕。

Select **Wi-Fi setup** and press the **OK** button.

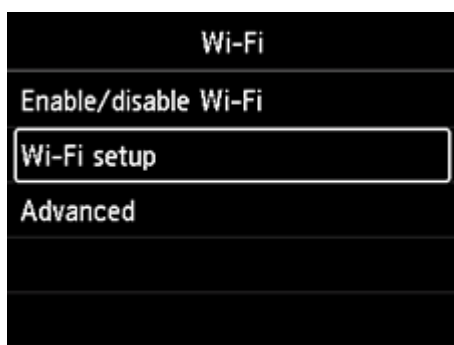

7. 選擇**手動連接(Manual connect)**並按 **OK** 按鈕。

Select **Manual connect** and press the **OK** button.

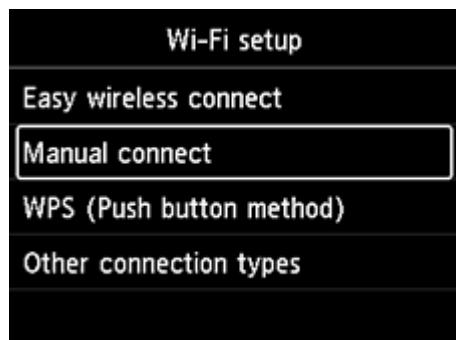

8. 選擇無線路由器並按 **OK** 按鈕。

Select your wireless router and press the **OK** button.



如果顯示其他螢幕或未找到無線路由器，請參見「[疑難排解](#)」。

If a different screen appears or no wireless router is found, see "[Troubleshooting](#)."


如果未找到您的路由器，請確定您的路由器設定符合以下打印機的規格：

If you do not find your router, please ensure your router setting meets the below printer requirement:

- a. 頻率 Frequency: 2.4GHZ
- b. 頻道 Channel: 1-11 (其中一條 either one)

9. 將顯示以下螢幕之一。

One of the screens below will appear.

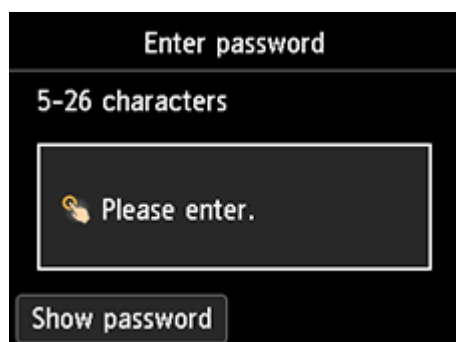

10. 按 **OK** 按鈕。

Press the **OK** button.

11. 輸入密碼。文字輸入區分大小寫。

關於如何輸入字元和如何變更字元類型，請參見「[文字輸入](#)」。

Enter the password. Text entry is case-sensitive.

For how to enter characters and how to change the character type, see "[Text Entry](#)"



12. 輸入後，在鍵盤上選擇 **OK**，然後按 **OK** 按鈕。

After entry, select **OK** on the keyboard, and then press the **OK** button.




13. 按 **OK** 按鈕。

Press the **OK** button.




14. 顯示下方的螢幕時，請按 **OK** 按鈕。

When the screen on the below appears, press the **OK** button.

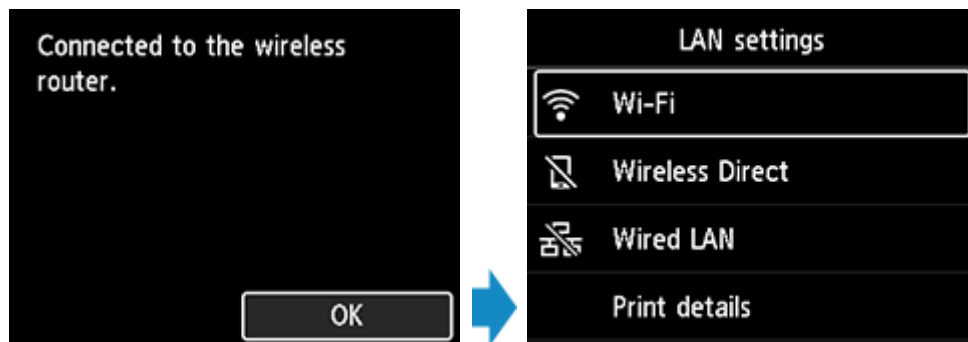

15. 按主頁(**HOME**)按鈕(A)。

Press the **HOME** button (A).

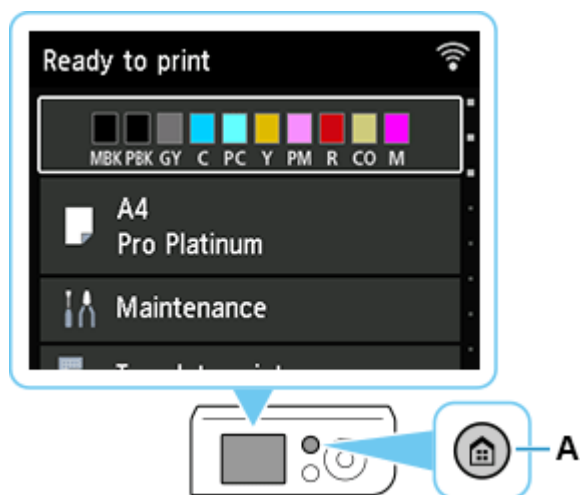

網路連接設定完成。

連接完成後，顯示在螢幕的右上方。

The network connection setup is now complete.

Once connection is complete,  appears at the upper right of the screen.

下載及安裝步驟

Driver download and Installation procedure

16. 到以下佳能網站並下載印表機的驅動程式

Go to below Canon webpage and download the printer driver

<https://hk.canon/en/support/imagePROGRAF%20PRO-300/model>

17. 選擇並下載以下檔案

Choose and download below files

PRO-300 Driver setup package (Mac)

18. 按網頁內的〔下載〕，下載完成後開啟該檔案安裝

Click [Download] in the webpage, and then execute the file after download was completed

19. 按〔Setup〕

Click [Setup]




20. 按〔打開〕


Click [Open]




21. 按〔下一步〕
Press [Next]

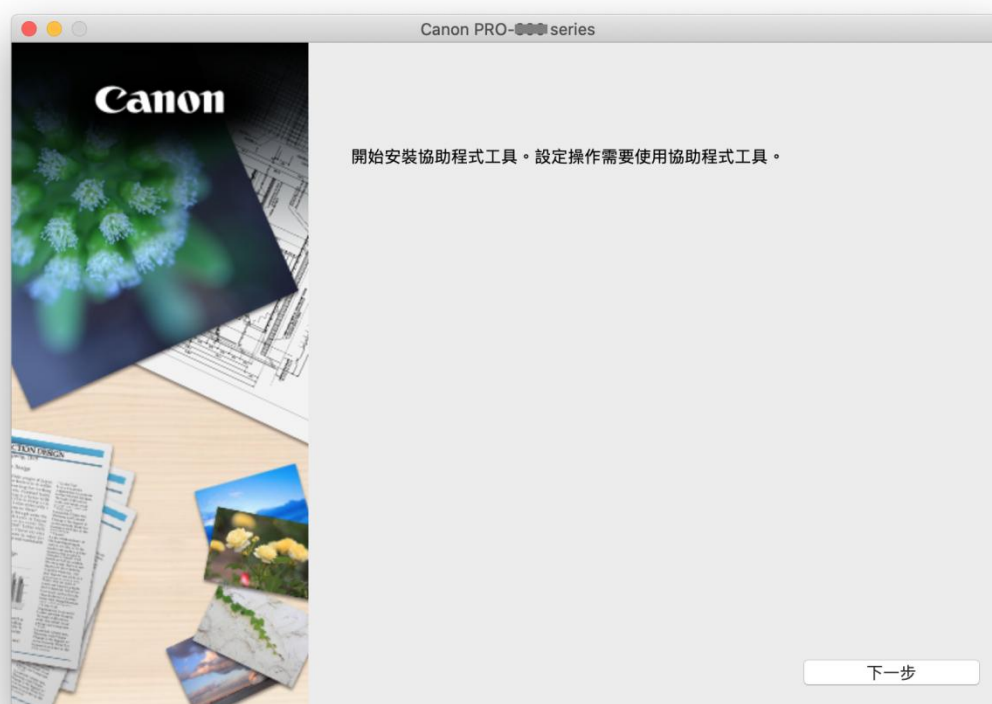

22. 請輸入電腦帳號密碼，再按〔安裝輔助程式〕
Please type in the password of computer account, then click [Install Helper]

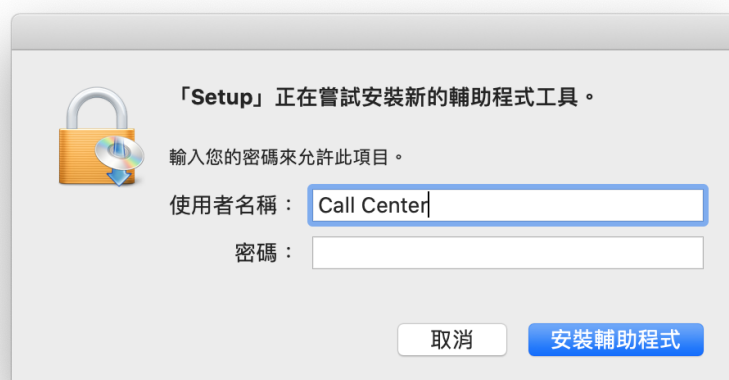

23. 按〔開始設定〕
Press [Start Setup]

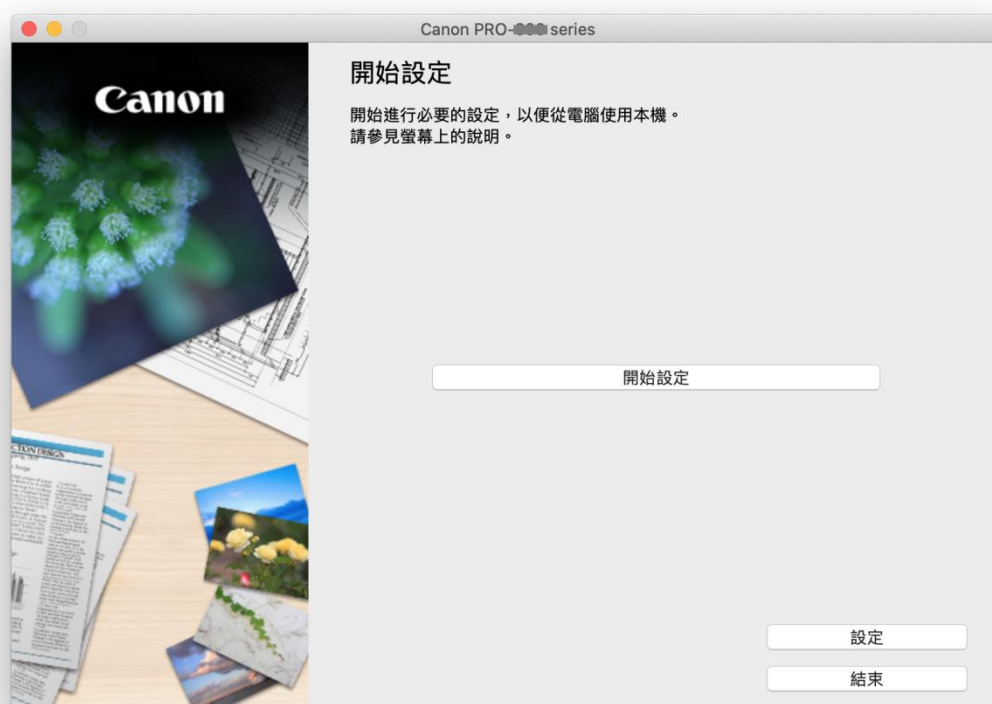

24. 按〔下一步〕
Click [Next]



25. 請等候
Please wait



26. 按〔是〕
Click [Yes]



27. 閱後按〔同意〕或〔不同意〕

Click [Agree] or [Do not agree] after reading




28. 請等候

Please wait



29. 選擇〔Wi-Fi 連接〕，再按〔下一步〕
Choose [Wi-Fi Connection], then click [Next]

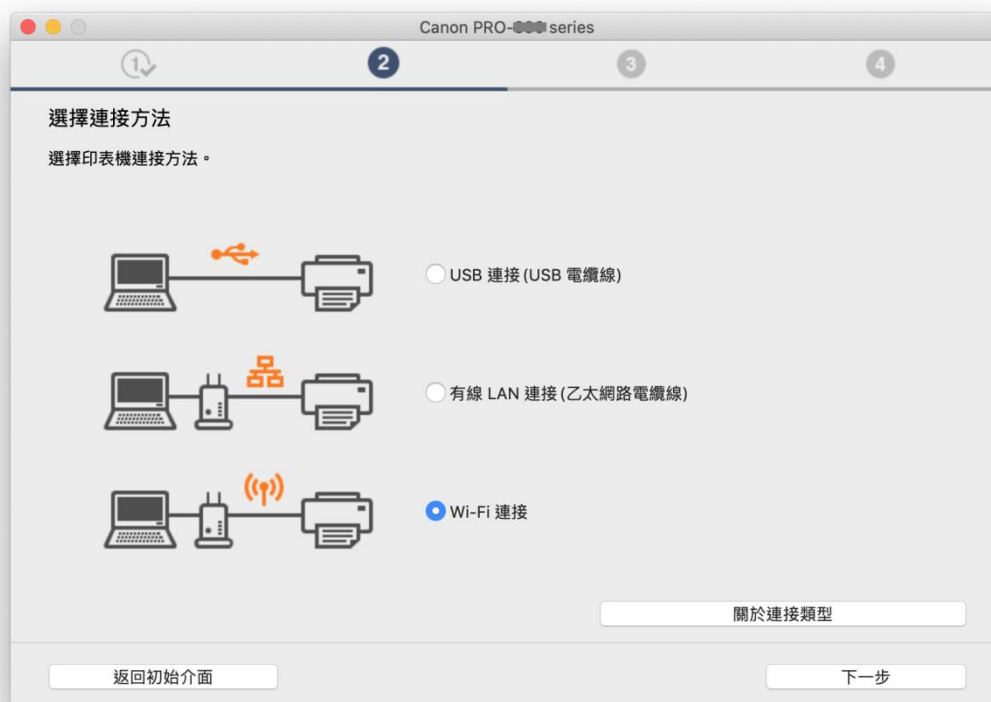


30. 按〔下一步〕
Click [Next]



31. 請等候
Please wait



32. 選擇打印機，然後按〔下一步〕
Choose the printer, then click [Next]

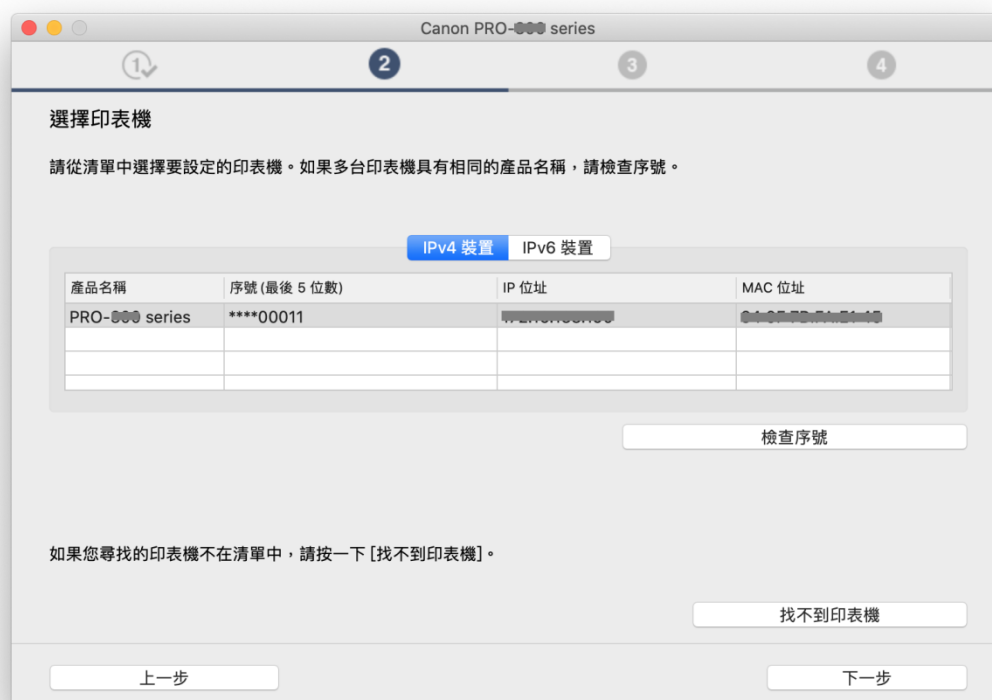

33. 請等候
Please wait



34. 按〔新增打印機〕
Click [Add Printer]



- 35.


36. 選擇〔Canon PRO-300 series〕，確定「使用：」為〔Canon PRO-300 series〕，再按〔加入〕
Choose [Canon PRO-300 series], and make sure “Canon PRO-300 series” is in “Use:” column, then click [Add]



37. 按〔下一步〕
Click [Next]



38. 按〔下一步〕
Click [Next]

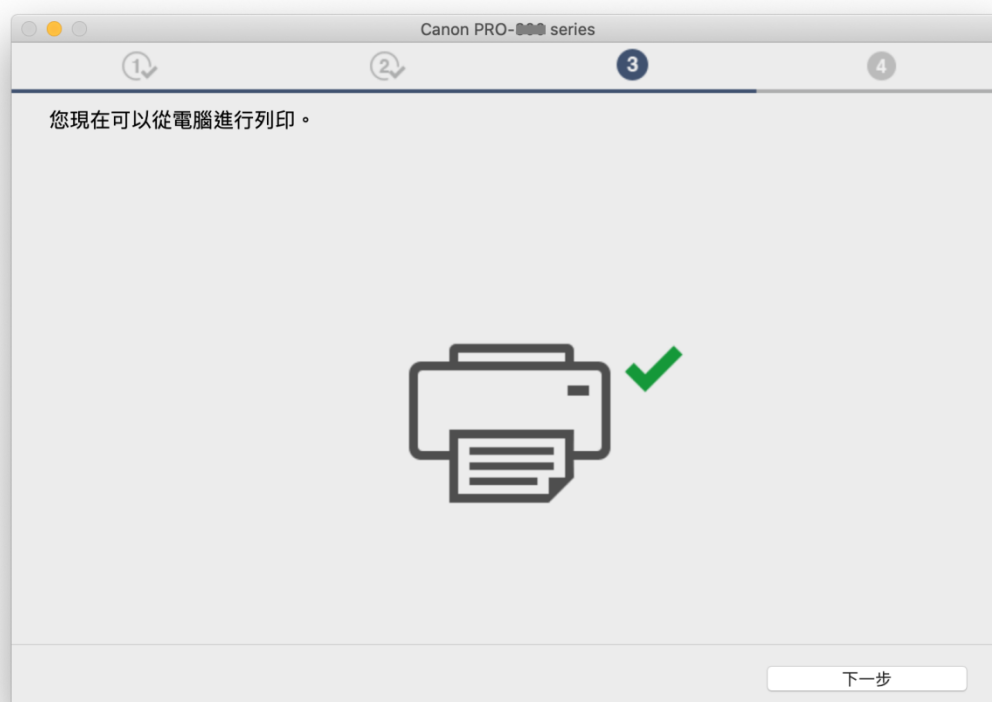

39. 安裝完成，按〔線上繼續〕
Driver installation was completed, click [Continue online]



-完-
-End-