
LBP7110Cw 以 USB 連線連接印表機之驅動程式步驟 (以 MAC OSX 10.10 作示範) The Driver installation procedure for LBP7110Cw (Via USB)(MAC OSX 10.10 as sample)

- **注意: 安裝驅動程式前請勿接駁 USB 線,以免系統發生錯誤**
- ** Please don't plug the USB cable until the driver asked to do so**
- 1. 到佳能網站 https://hk.canon/en/support, 選擇相關的印表機型號及下載印表機的驅動程式 UFTRII LT Printer Driver

 (Go to: https://hk.canon/en/support solost related printer model, then download the

(Go to: https://hk.canon/en/support, select related printer model, then download the printer driver - UFTRII LT Printer Driver)


2. 開啟下載檔案「UFRII LT Printer Driver 」,進入「SFP」文件夾(Open "UFRII LT Printer Driver", then open "SFP")

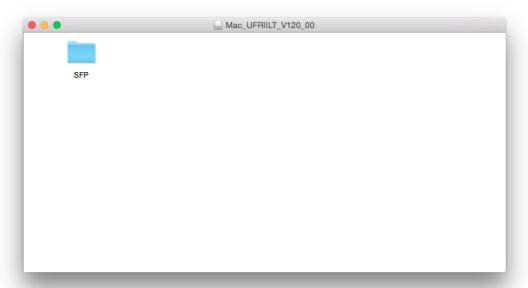


3. 開啟"UFRII_LT_***.pkg"文件開始安裝設定 (Double Click / Open "UFRII_LT_***.pkg")




4. 按「Continue」(Choose "Continue")

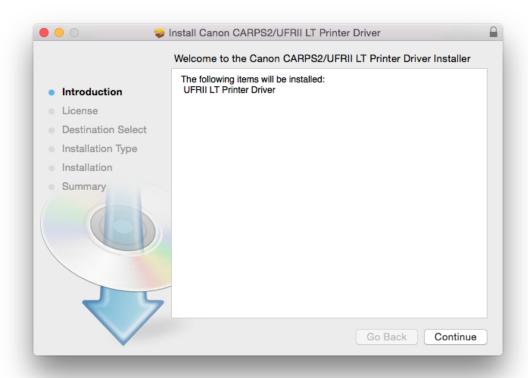


5. 接「Continue」(Choose "Continue")

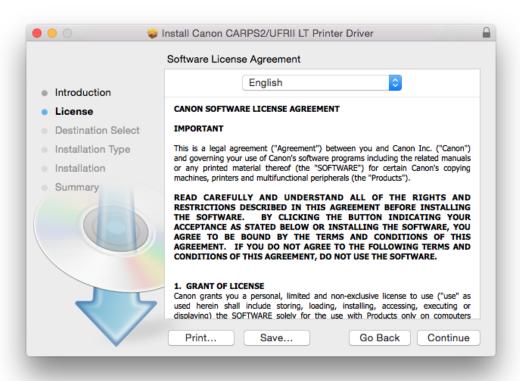

6. 如出現以下畫面,按「Agree」 (Choose "Agree")

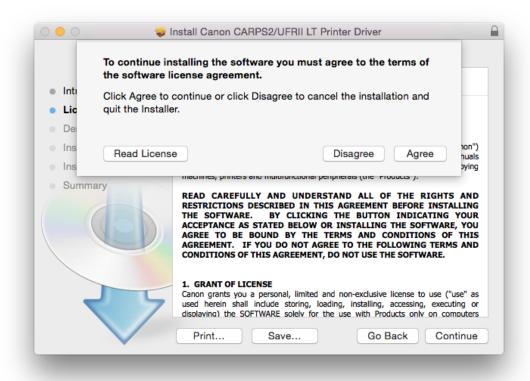

7. 按「Install」 (Choose "Install")

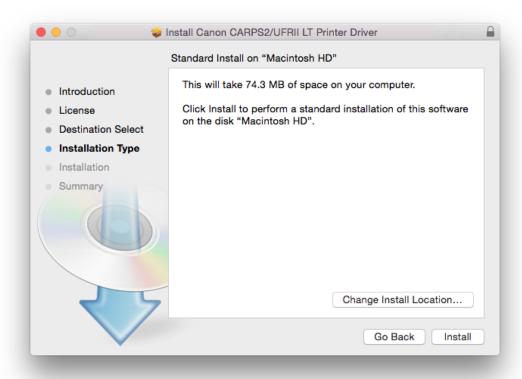

8. 按「Close」 (Choose "Close")



9. 完成安裝驅動程式後需新增印表機,先開啟印表機及以 USB 電纜線連接,到「系統偏好設定(System Preference)」,選「印表機與掃描器(Printers & Scanners)」
(Turn on printer and connect with USB cable, go to "System Preference", then open "Printers & Scanners")



10. 選取左下角「+」按鈕,選「加入印表機或掃描器(Add Printer or Scanner)」 (Click "+", then choose "Add Printer or Scanner")




11. 名稱選擇「Canon LBP7100Cw」,種類「Bonjour」,確認「使用(Use)」為「Canon LBP7100C/7110C」,然後按「加入(Add)」("Name" chooses "Canon LBP7100Cw", "Kind" chooses "Bonjour". After you confirm "Use" is "Canon LBP7100C/7110C", then choose "Add")


● ○ ●	加入		
	Q		
預設值 傳真 IP Windows		搜尋	
- Arm			
名稱 Canon LBP7110Cw		▲ 種類	
Canon EBP/110CW		Bonjour	
名稱: Canon LBP7110Cw			
Editor Editoria			
位置:			
使用: Canon LBP7100C/	7110C		*
			加入

*** 如「使用(Use)」部份不是「Canon LBP7110***」,請按以下步驟設定** (*** If "Use" is not "Canon LBP7110***", please reference the steps below)**


a) 請如下圖打開「使用(Use)」的選單,選 Select Software (Open "Use", then choose "Select Software")

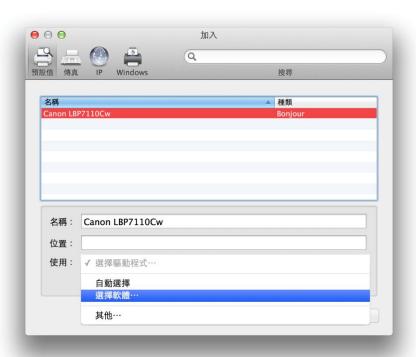

b) 輸入 7110 以搜尋「Canon LBP7100C/7110C」(type "7110", then choose "Canon LBP7100C/7110C")

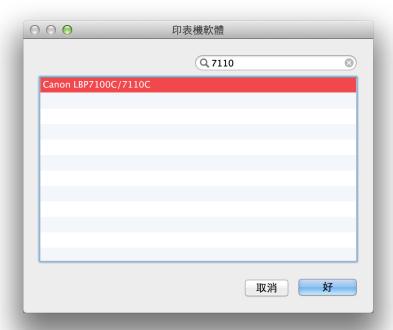

12. 加入完成 (Finish)

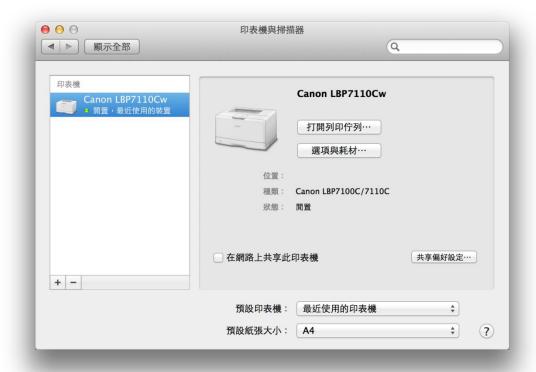

-完-

-End-