



**LBP8780x 以 LAN 連線連接印表機之驅動程式步驟 (以 Win 10 作示範)**  
**The Driver installation procedure for LBP8780x (Via LAN)(Win 10 as example)**

**\*\*注意: 安裝驅動程式前請勿接駁 USB 線，以免系統發生錯誤\*\***  
**\*\* Please don't plug the USB cable until the driver asked to do so\*\***


開啟印表機，使用區域網路纜線將本機連接到路由器，推入接頭直至聽到喀嗒聲  
Switch on machine. Connect the machine to a router by using a LAN cable. Push the connector in until it clicks into place.

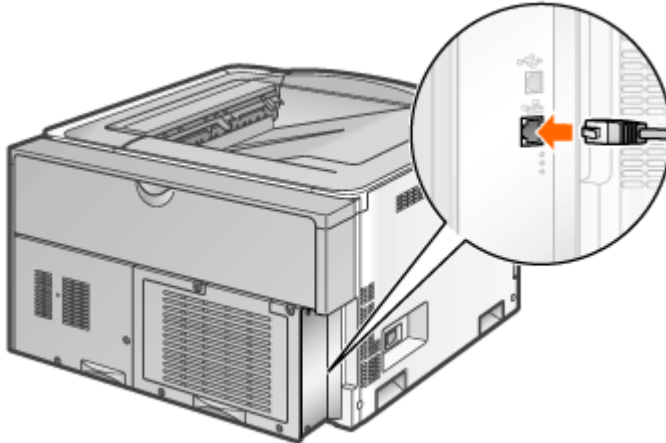


1. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20LBP8780x/model>，下載印表機的驅動程式 – UFR II Printer Driver  
(Go to: <https://hk.canon/en/support/imageCLASS%20LBP8780x/model>, then download the printer driver – UFR II Printer Driver)
2. 下載的文件以自解壓縮檔檔案(.exe 格式)保存在指定的文件夾中，打開文件解壓縮。將在同一文件夾中創建新文件夾。新文件夾的名稱與解壓縮文件的名稱相同  
(Open “UFR II\_Driver\_\*\*\*.exe”; a new folder will be created.)  
-如打開文件解壓縮時出現「使用者帳戶控制」選項，請按「是」(If “User Account Control” window pops up, please click “Yes”)

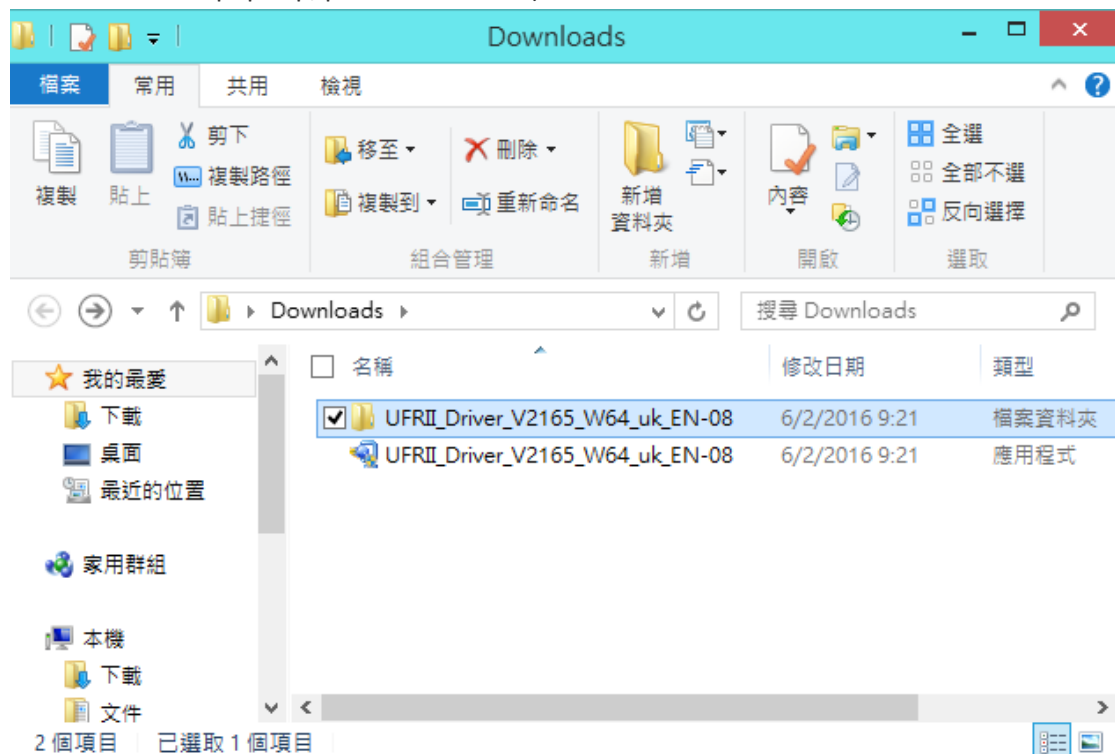

3. 進入「Driver」文件夾，然後開啟“Setup.exe” (Go into “Driver” folder, then open “Setup.exe”)

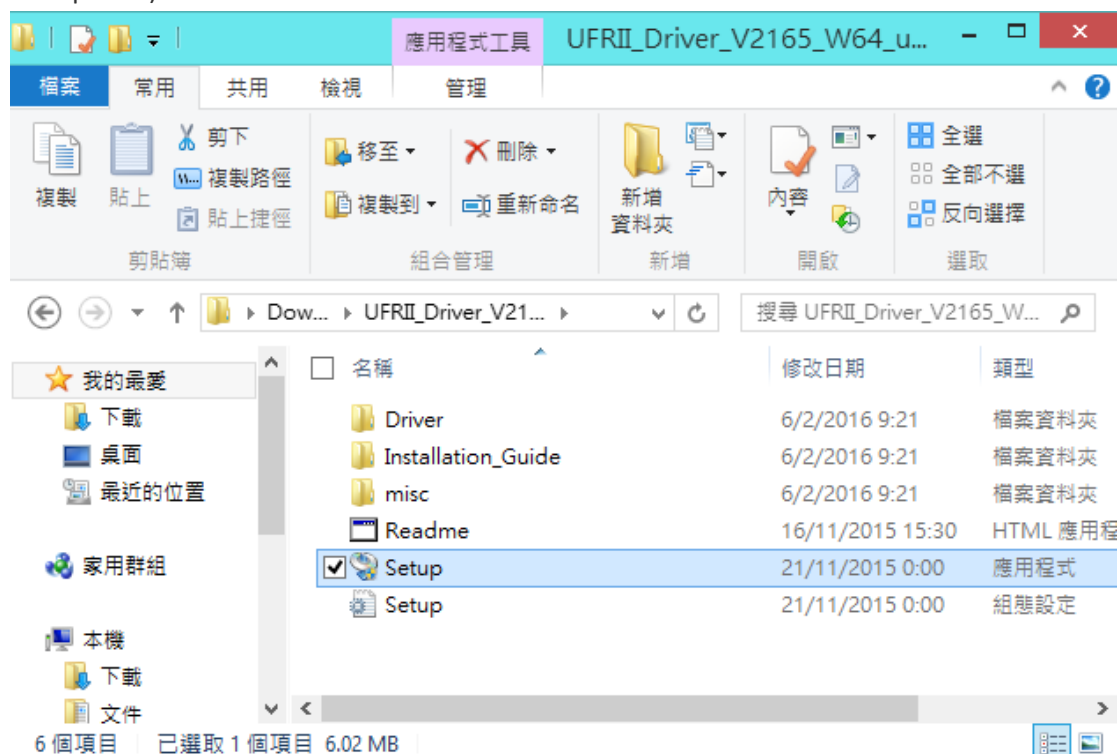

4. 按「Yes」 (Click “Yes”)

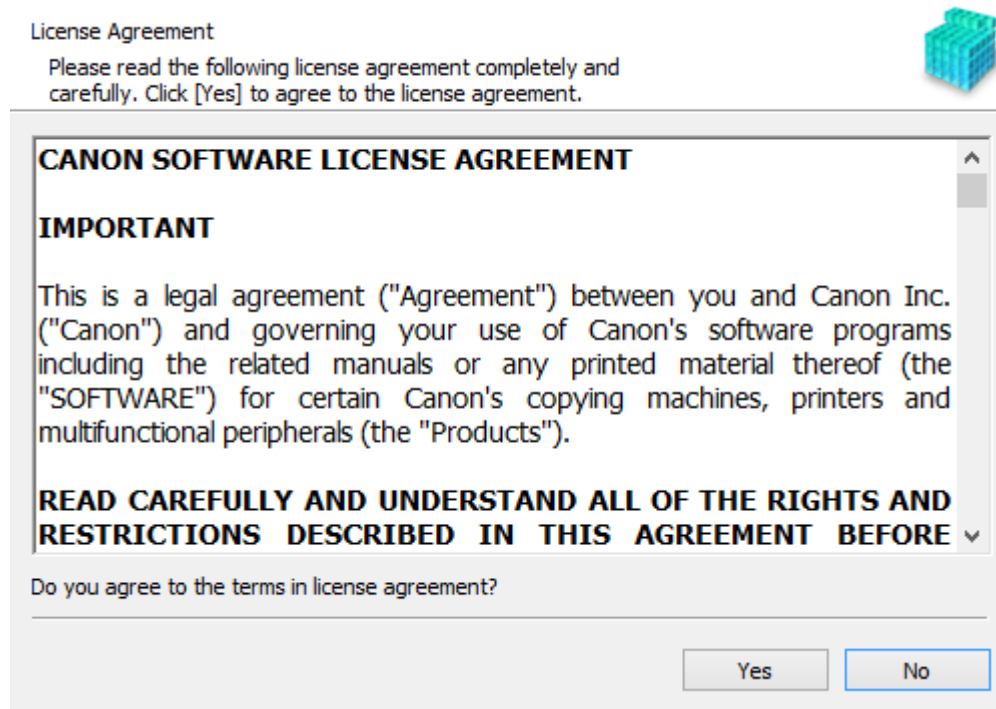


5. 選「Standard」，按「Next >」 (Select “Standard”, then click “Next >”)

The UFR II printer driver will be installed on your computer.  
Select a setup method, and then click [Next].



Printer Setup



- Standard  
Search for printers on the network and install.  
 Reactivate Printers in the Sleep Mode and Search
- Custom  
Specify a port or an IP address manually to install drivers of local or network printers.  
You can also specify other settings, such as setting a printer as a shared printer.
- USB Connection  
Connect the printer with a USB cable and install.

< Back   Next >   Cancel

6. 選「Add New Printers」，按「Next >」  
(Select “Add New Printers”, then click “Next >”)

Select Process  
Select the items to install and the process to install the printer driver.



UFR II Printer Driver

Process to Install Printer Driver

- Add New Printers and Update Existing Printer Drivers
- Add New Printers

Canon Driver Information Assist Service

By installing this service, you will be able to retrieve device information and perform Department ID Management and User Authentication from your computer when using shared printers.

< Back   Next >   Cancel

7. 點選「LBP.....」，按「Next >」 (Select “LBP.....”, then click “Next >”)

Select Printers to Install

Select the printers to add, and then click [Next].



Printer List:

Device Name	Product Name	IP Address	MAC Address
<input checked="" type="checkbox"/> LBP	LBP	192.168.1.107	

Set Printer Information

< Back    Next >    Cancel

8. 按「Start」 (Click “Start”)

The setup program will install the drivers with the following settings.

\* Installation cannot be canceled once started.




Printer List for Driver Installation:

= Add =  
Printer: LBP  
Driver : Canon LBP  
Port : IP\_192.168.1.107

Click [Start] to install.

< Back    Start    Cancel

9. 建議別選「Restart My Computer Now」，按「Restart」重新開機 (Recommend select “Restart My Computer Now”, then click “Restart” to reboot computer)

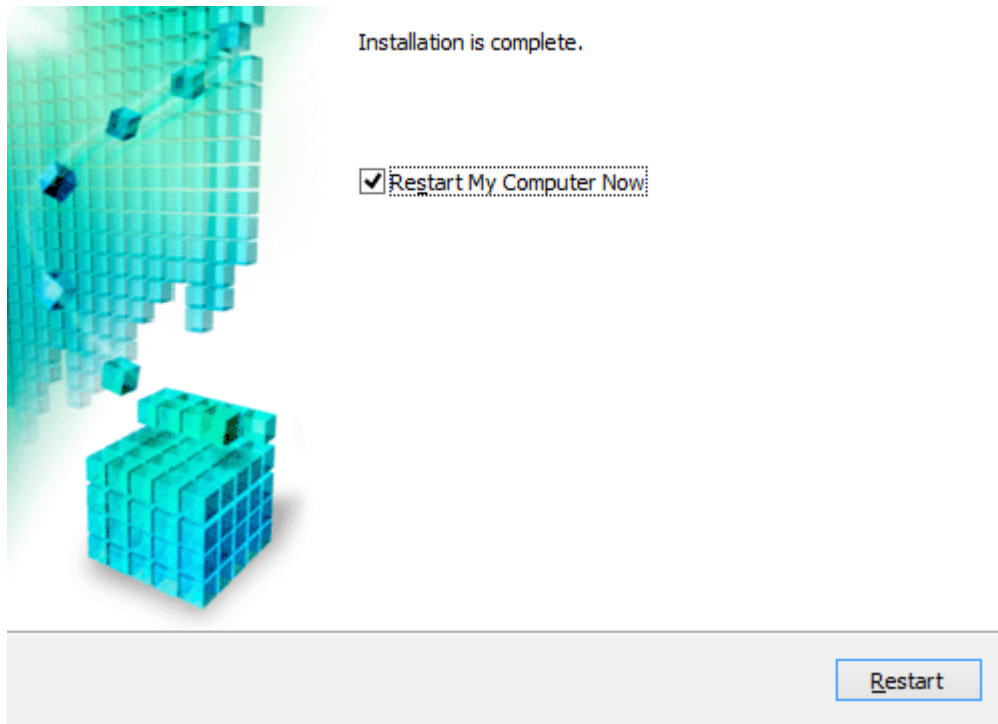

-完-  
-End-