



透過乙太網路連接安裝 LBP841Cdn 印表機的驅動程式步驟 (以 Win 10 作示範)  
LBP841Cdn printer driver Installation Guide via LAN connection (Win 10 as example)

使用乙太網路連接線接駁到印表機及開啟印表機

Connect the machine to a router by using a LAN cable and turn on printer

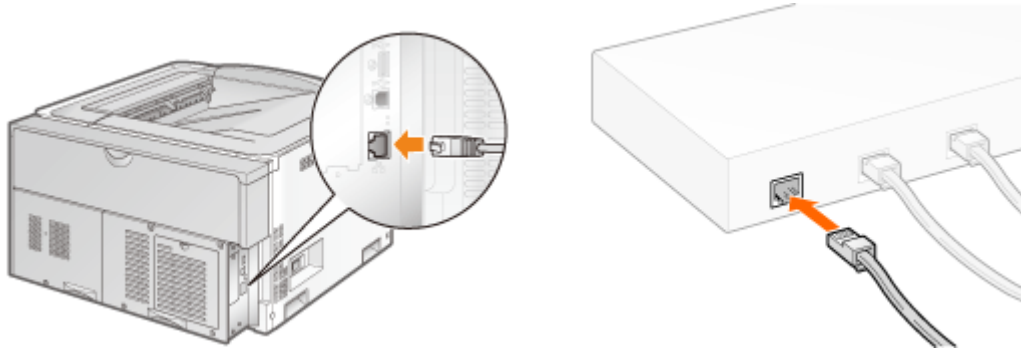


1. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20LBP841Cdn/model>  
下載印表機的驅動程式 - UFR II Printer Driver Vxx.xx  
Go to: <https://hk.canon/en/support/imageCLASS%20LBP841Cdn/model>  
Download the printer driver - UFR II Printer Driver Vxx.xx
2. 下載的文件以自解壓縮檔檔案 (.exe 格式) 保存在指定的文件夾中  
The self extractor file (.exe format) is saved to specified folder

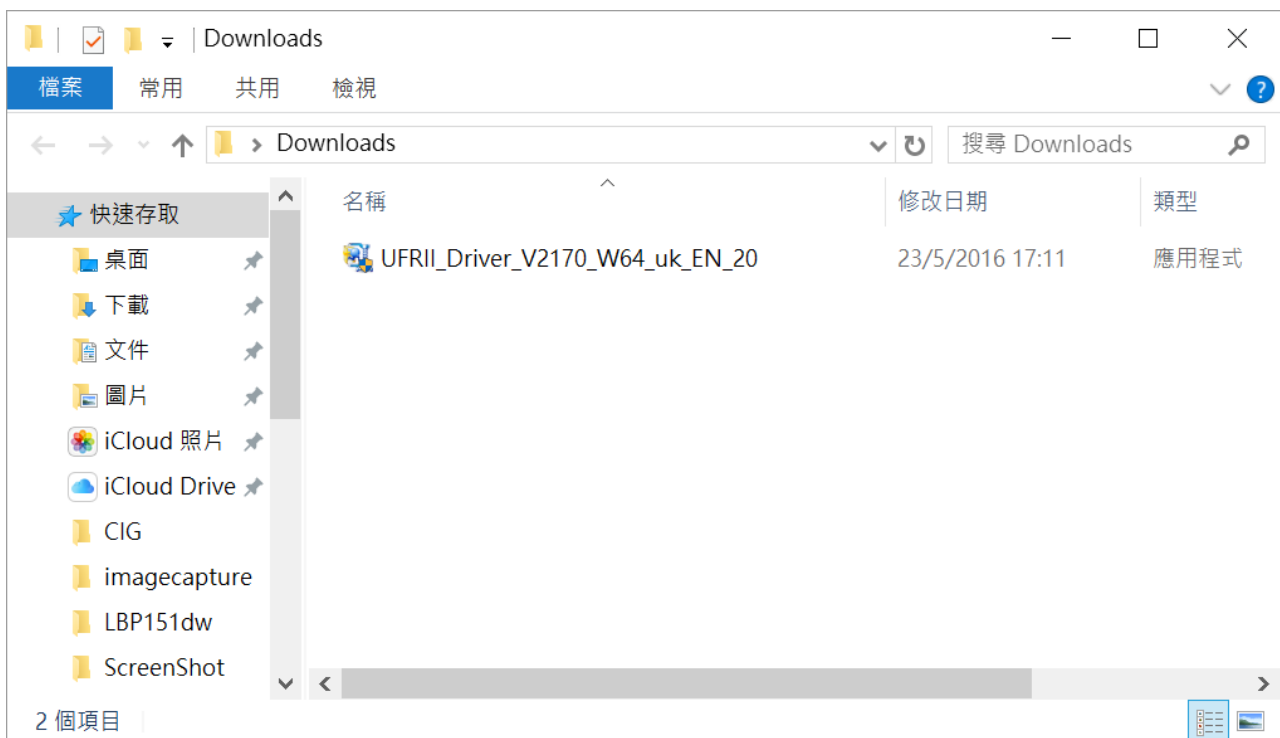


3. 打開「UFR11\_Driver\_\*\*\*.exe」檔案。將在同一文件夾中創建新文件夾，如打開文件解壓縮時出現「使用者帳戶控制」選項，按「是」，打開「UFR11\_Driver\_\*\*\*」文件夾


Open "UFR11\_Driver\_\*\*\*.exe" file, a new folder will be created. If "User Account Control" window shows up, click "Yes", and open "UFR11\_Driver\_\*\*\*" file folder

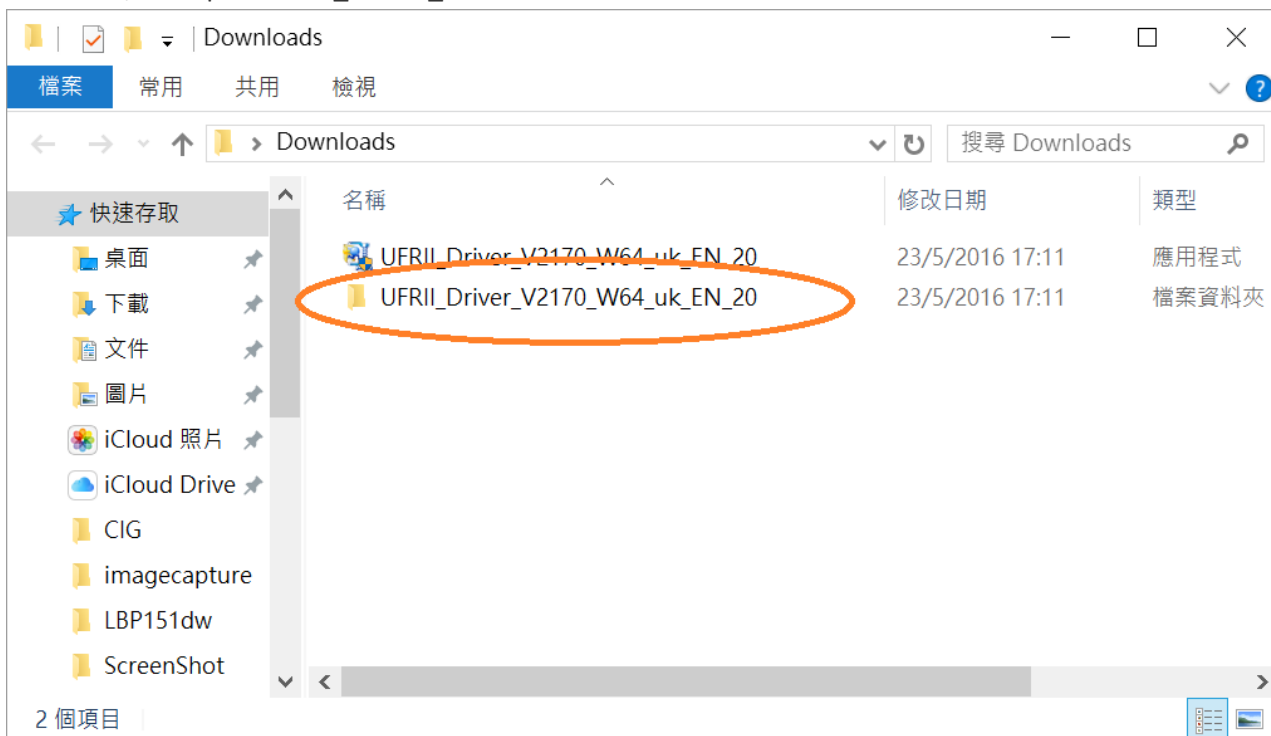


4. 開啓“Setup.exe”檔案  
Open “Setup.exe” file

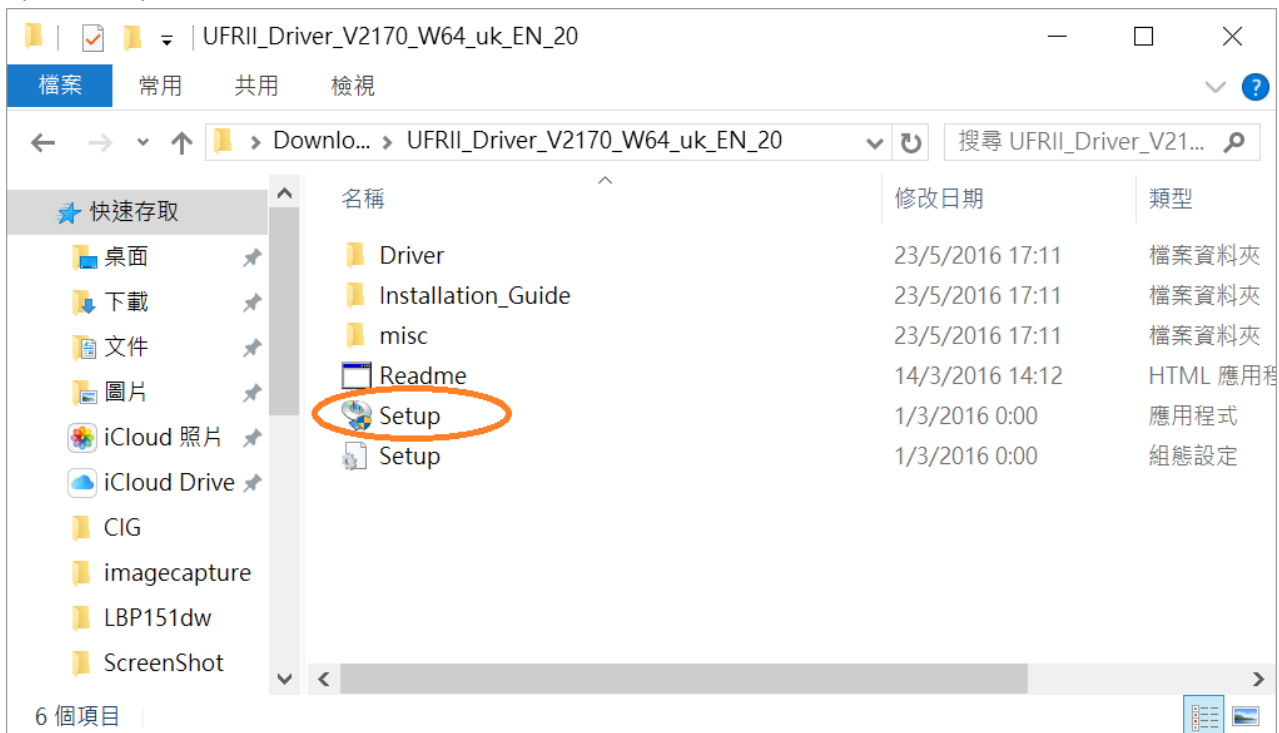

5. 按「Yes」  
Click "Yes"

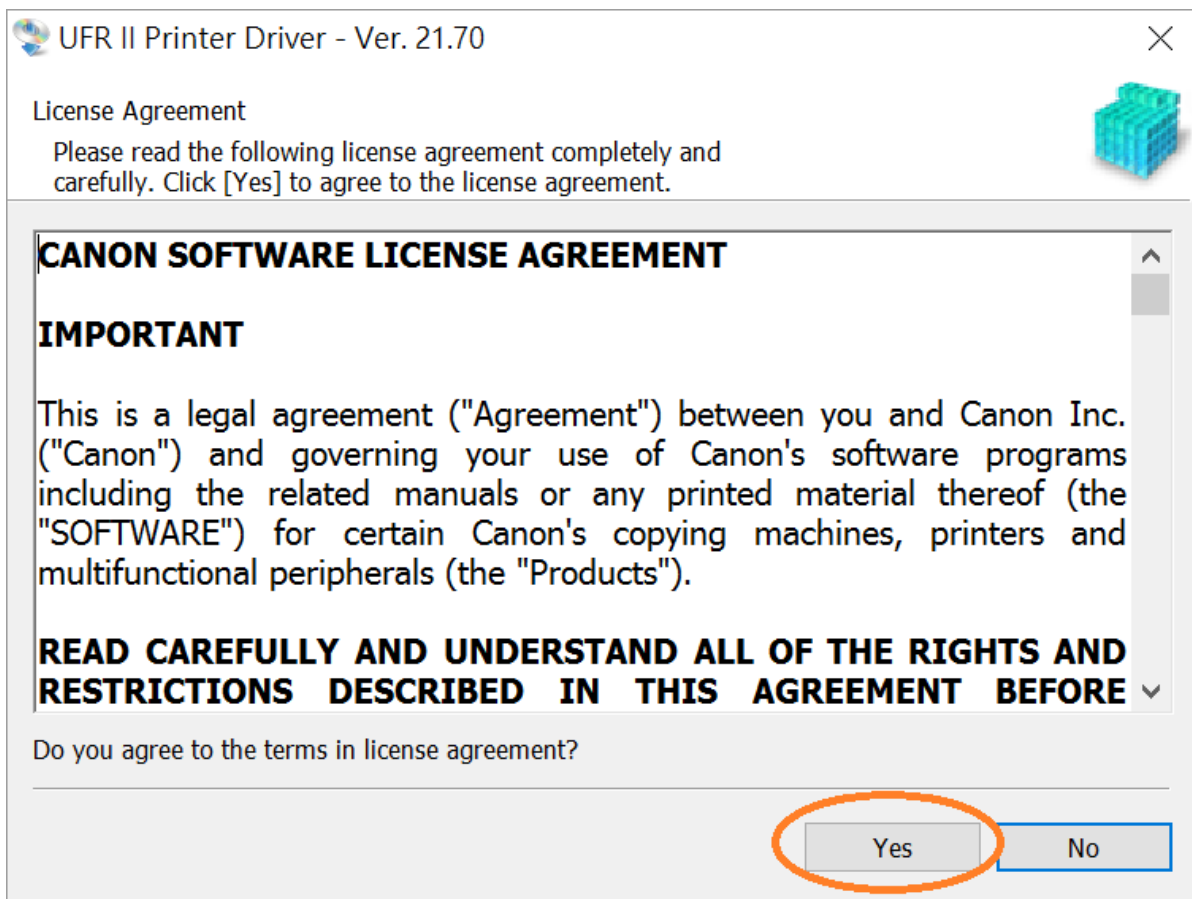

6. 選「Standard」，按「Next >」  
Choose "Standard", and click "Next >"

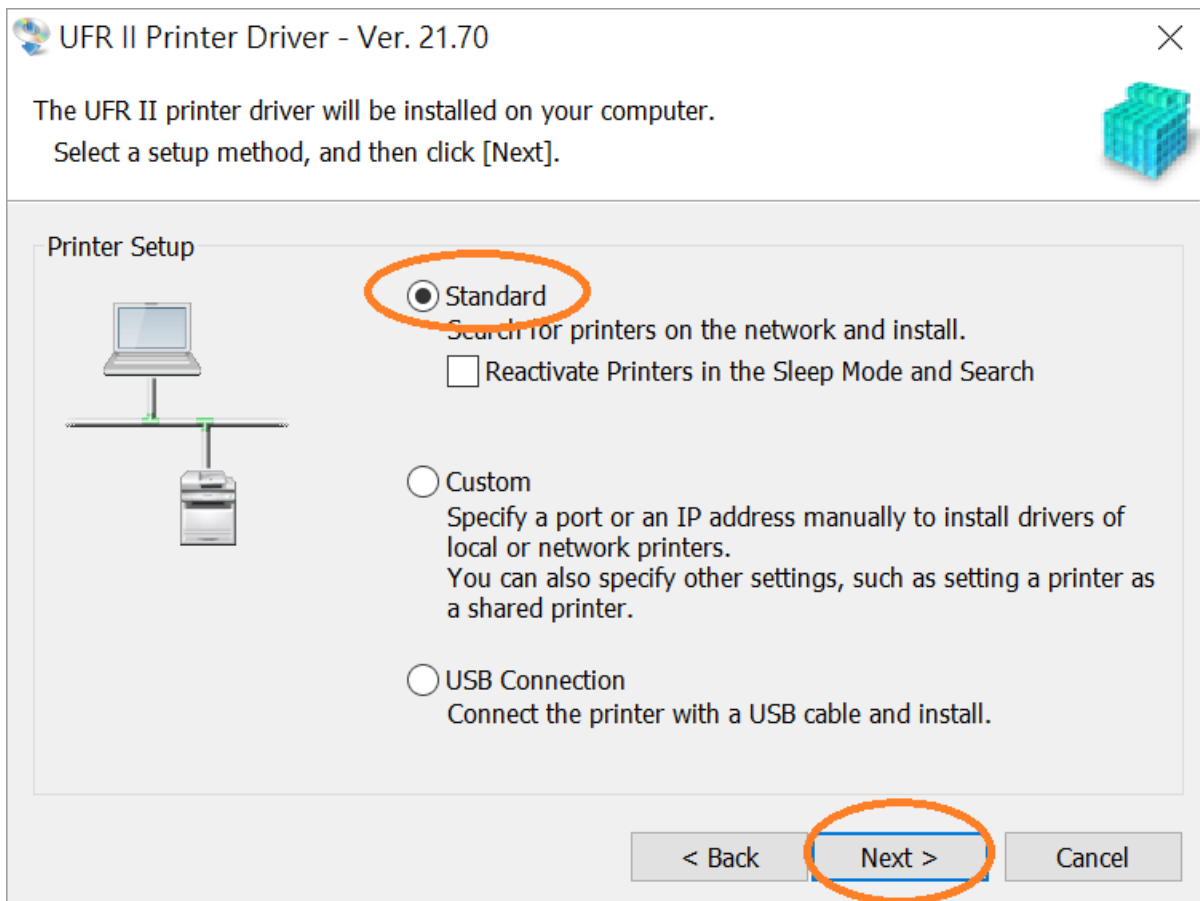

7. 於「Printer List」內剔選「LBP841」(以 LBP251 為例子)，按「Next >」  
Check the box “LBP841” (LBP251 as example) at “Printer List”, and click “Next >”

UFR II Printer Driver - Ver. 21.70

Select Printers to Install  
Select the printers to add, and then click [Next].

IPv4 Devices IPv6 Devices

Printer List:


Device N...	Produc...	IP Address	MAC Ad...	
<input checked="" type="checkbox"/>	LBP251	LBP251	192.168.1.12	28C2DD...

Clear All Search Again


Set Printer Information

< Back Next > Cancel

8. 按「Start」(以 LBP251 為例子)  
Click "Start" (LBP251 as example)

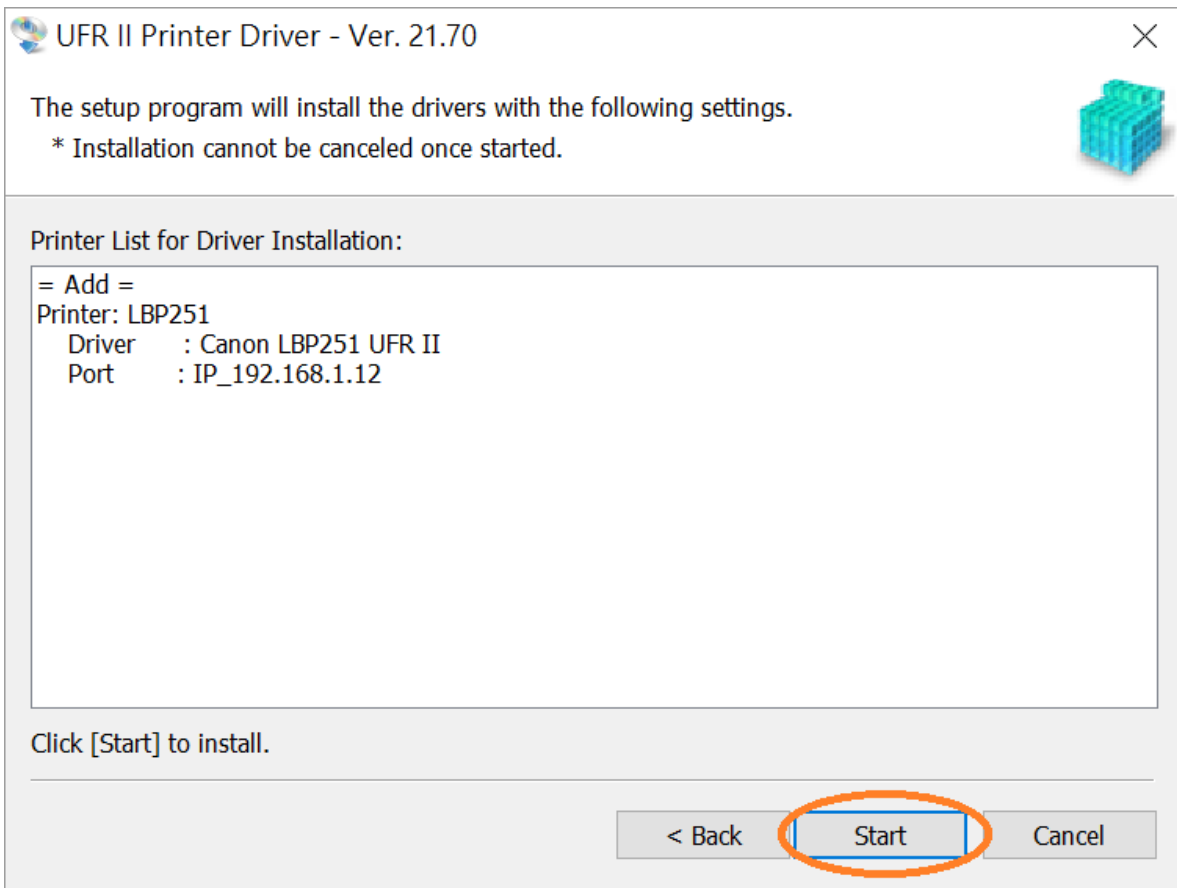


9. 請等待安裝精靈完成印表機驅動程式安裝  
Please wait for setup wizard to accomplish the printer driver installation

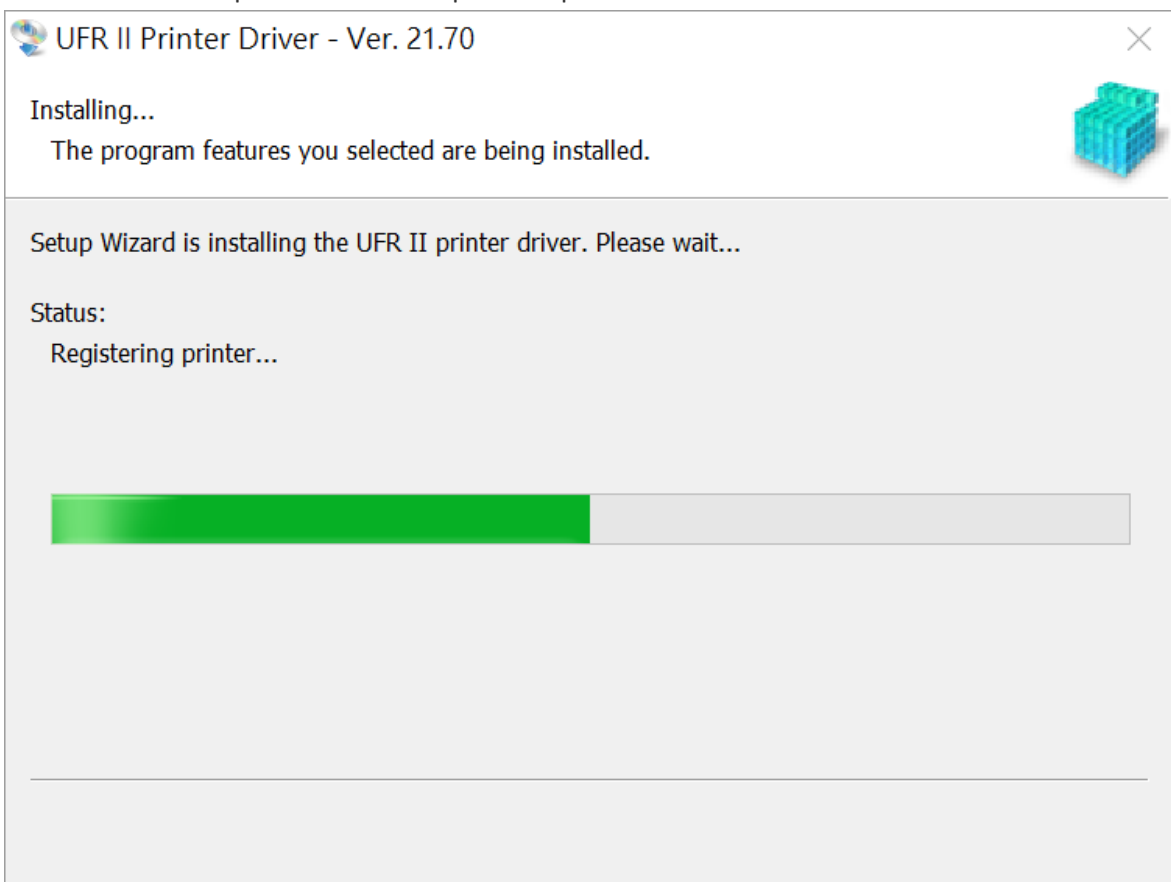

10. 安裝完成，建議別選「Restart My Computer Now」，按「Restart」重新開機

Installation is completed. We recommend to choose “Restart My Computer Now”, click “Restart” to reboot computer

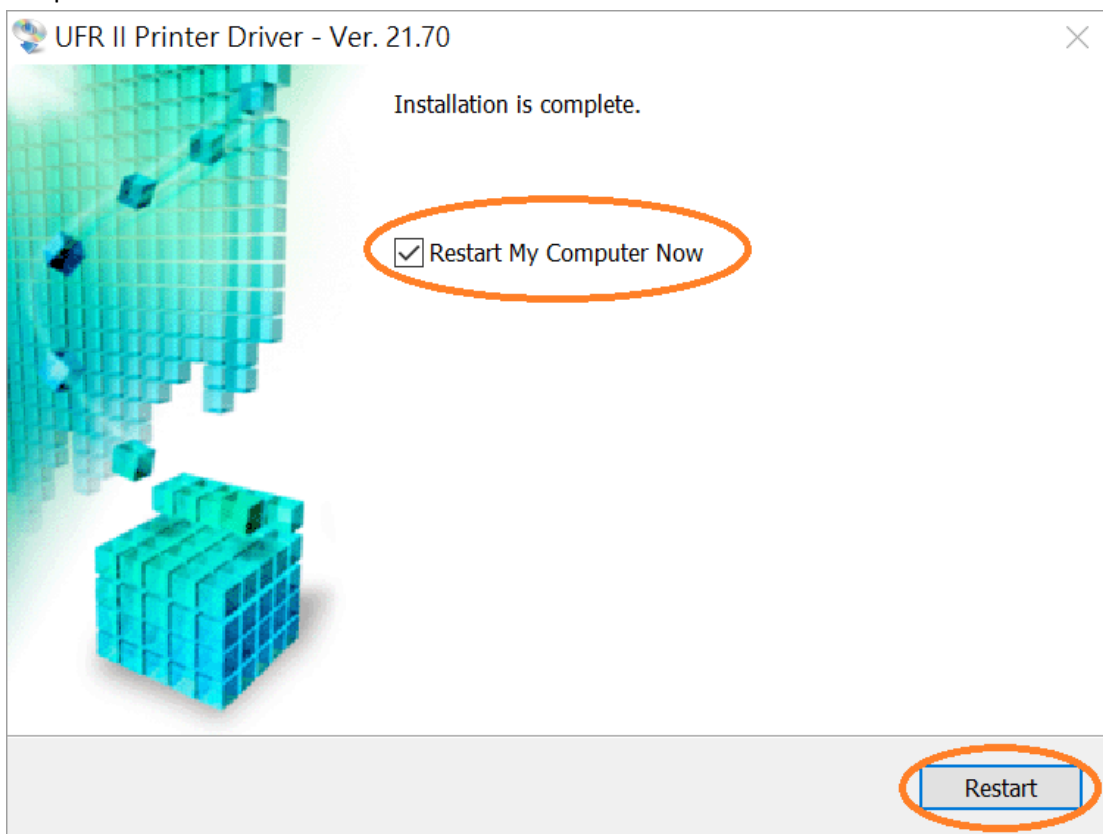

-完-  
-End-