

MF633Cdw – 掃描到電郵 / SMB 設定教學

MF633Cdw – Scan to Email / SMB settings

1. 確認印表機電源已開啟及已完成網絡連線設定

Confirm the printer is turn on and completed the network connection settings


2. 在首頁中按「狀態確認」

Tap “Status Monitor” on the home screen



3. 按「網路資訊」

Tap “Network Information”

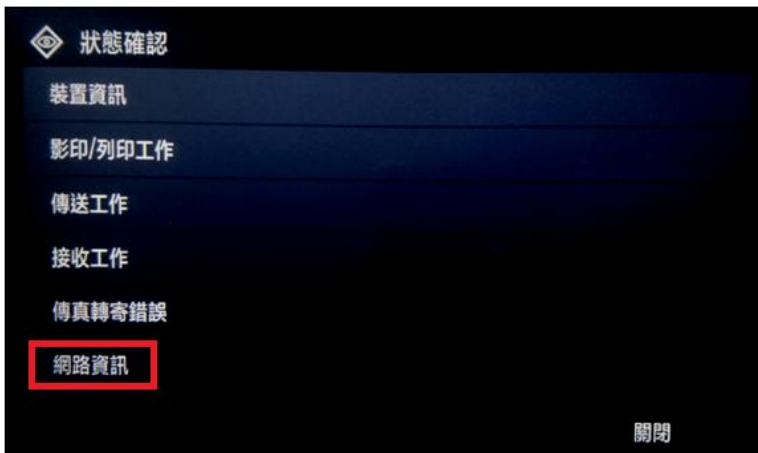

4. 按「IPv4」

Tap “IPv4”




5. 檢查 IP 位址

Check the IP Address



6. 在電腦瀏覽器網址欄輸入印表機 IP 位址，以系統管理員模式登入遠端控制台（如已設定管理員識別碼及密碼，須在此輸入）

Type the IP address in the address bar of internet browser, login with System Manager Mode (Enter the System Manager ID and PIN if necessary)

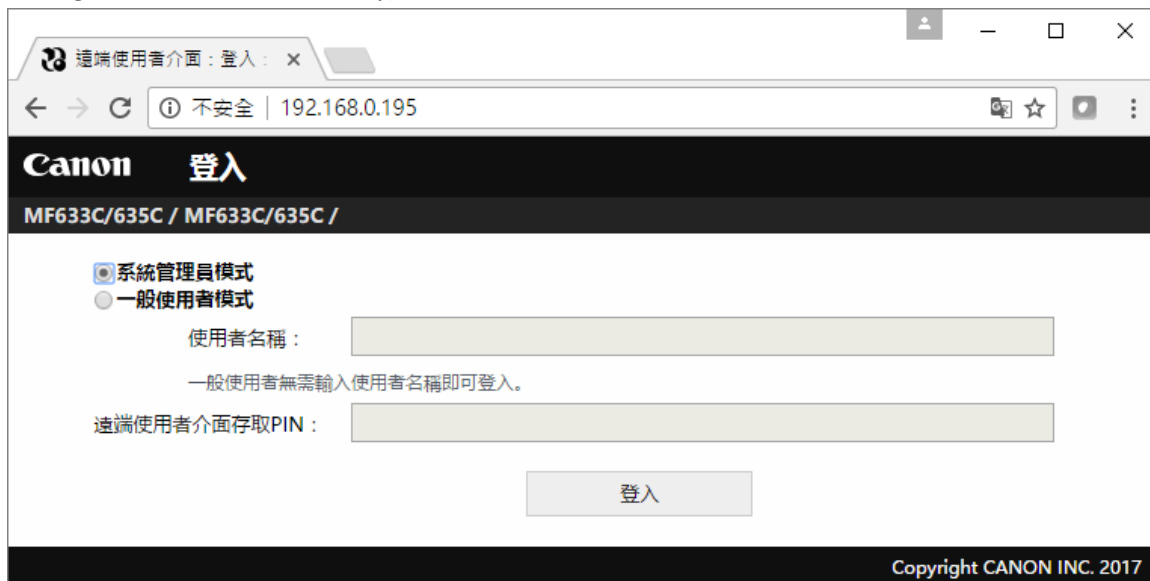


7. 按「通訊錄」

Click "Address Book"



8. 選擇任何一個「未註冊」的項目
Choose either one of “Not Registered”

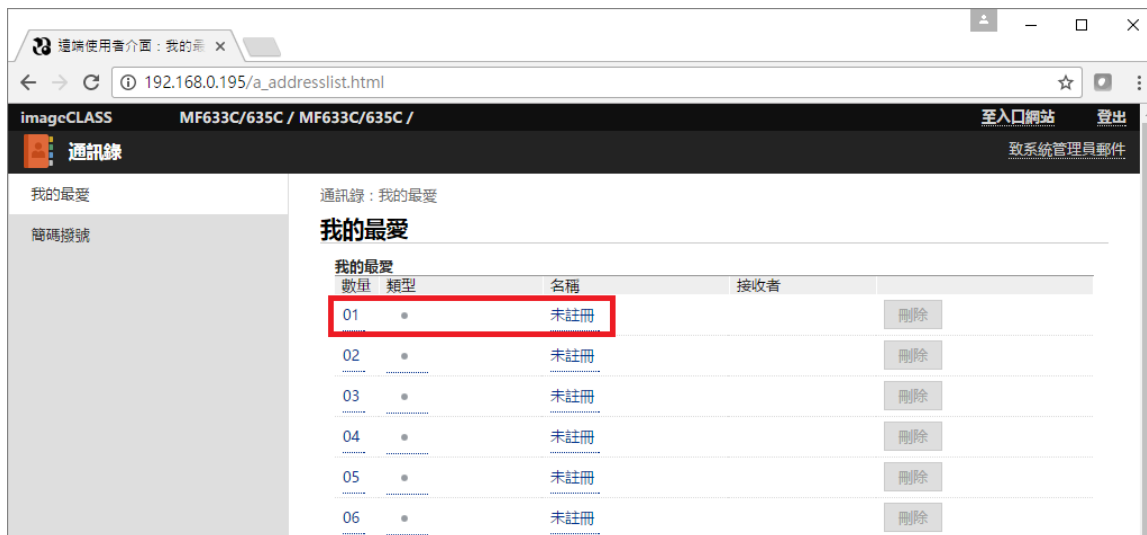

9. 選擇「電子郵件」，然後按「確定」；如要註冊 SMB 接收者請跳至第 11 步
Choose “E-Mail”, then click “OK”; please go to Step 11 if want to register with SMB recipient



10. 輸入名稱及電子郵件位址，然後按「確定」

Enter the name and e-mail address, then click “OK”

The screenshot shows a web browser window with the address bar displaying '192.168.0.195/a_email_regist.html?no=1'. The page title is 'imageCLASS MF633C/635C / MF633C/635C /'. The left sidebar contains '我的最愛' (My Favorites) and '簡碼撥號' (Shortcode Dialing). The main content area is titled '通訊錄：我的最愛 > 註冊新接收者 > 註冊新接收者：電子郵件' (Address Book: My Favorites > Register New Recipient > Register New Recipient: Email). Below this, the title '註冊新接收者：電子郵件' (Register New Recipient: Email) is displayed. There are two buttons, '確定' (OK) and '取消' (Cancel), at the top right. The form fields are as follows: '電子郵件' (Email) with a value of '01', '名稱' (Name) with a value of 'Test', and '電子郵件位址' (Email Address) with a value of 'xxx@xxx.com'. The footer of the page reads 'Copyright CANON INC. 2017'.

11. 如要註冊 SMB 接收者，請選擇「檔案」，然後按「確定」

If want to register SMB recipient, please choose “File”, then click “OK”

The screenshot shows a web browser window with the address bar displaying '192.168.0.195/a_new.html?no=3'. The page title is 'imageCLASS MF633C/635C / MF633C/635C /'. The left sidebar contains '我的最愛' (My Favorites) and '簡碼撥號' (Shortcode Dialing). The main content area is titled '通訊錄：我的最愛 > 註冊新接收者' (Address Book: My Favorites > Register New Recipient). Below this, the title '註冊新接收者' (Register New Recipient) is displayed. There are two buttons, '確定' (OK) and '取消' (Cancel), at the top right. The form fields are as follows: '選擇要註冊的接收者類型並按一下[確定]。' (Select the recipient type to register and click [OK].), '要註冊的接收者類型' (Recipient type to register), and '類型' (Type) with a value of '檔案' (File). The '檔案' option is highlighted with a red box. The footer of the page reads 'Copyright CANON INC. 2017'.

12. 根據電腦 SMB 設定，輸入相關資料，然後按「確定」完成 SMB 設定。

According to the computer SMB settings, type in the details, then click “OK” to finish the SMB settings.

遠端使用者介面：編輯接收者

192.168.0.195/a_file_edit.html?no=2

imageCLASS MF633C/635C / MF633C/635C / 至入口網站 登出

通訊錄 致系統管理員郵件

我的最愛

簡碼撥號

通訊錄：我的最愛 > 接收者詳細資料：檔案 > 編輯接收者：檔案

編輯接收者：檔案

確定 取消

檔案

數量： 02

名稱： SMB

通訊協定： Windows(SMB)

主機名稱： \\DESKTOP-4NASKN9

資料夾路徑： Users\\Canon CallCenter\\Desktop\\SMB

使用者名稱： Canon CallCenter

☒ 變更密碼

密碼：

Copyright CANON INC. 2017

13. 如要設定 SMTP 伺服器，請返回入口網站，然後按「設定／註冊」

If need to setup SMTP server, please go back to the portal page, and then click “Settings/Registration”

遠端使用者介面：入口網站

192.168.0.195/portal_top.html

imageCLASS 裝置名稱： MF633C/635C 產品名稱(序號)： MF633C/635C 位置： 登出

遠端使用者介面：入口網站 Language: Chinese (Traditional) 致系統管理員郵件

最近更新：27/04 2017 04:23:44 PM

裝置基本資訊

裝置狀態

印表機： ● 列印就緒。

掃描器： ● 掃描就緒。

傳真： ● 準備傳送或接收傳真。

錯誤資訊

沒有錯誤。

消耗品資訊


狀態確認/取消

設定/註冊

通訊錄

Application Library

14. 按「傳送設定」
Click “TX Settings”

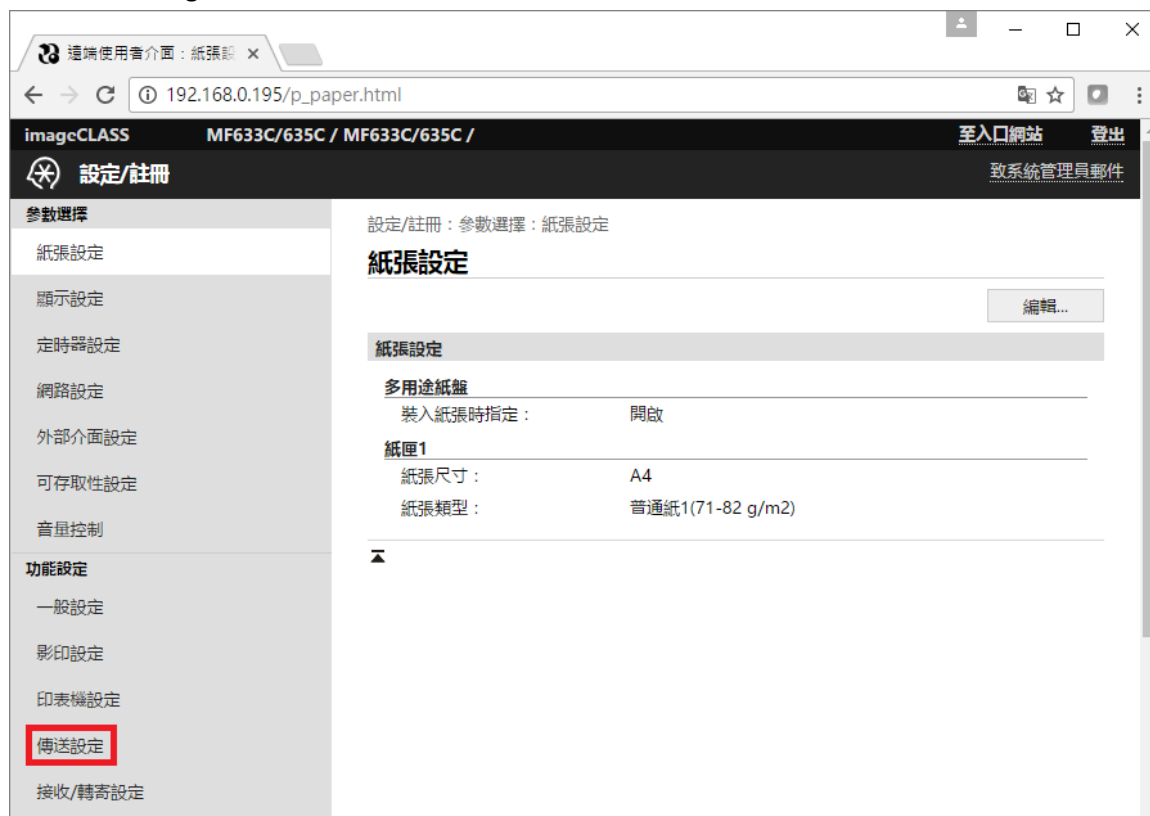

15. 按「網路設定 – 電子郵件／網際網路傳真設定」
Click “Network Settings – E-mail/I-FAX Settings”



16. 按「編輯」

Click "Edit"

The screenshot shows the web interface of an imageCLASS MF633C/635C printer. The browser address bar shows the URL 192.168.0.195/tx_email_ifax.html. The page title is "設定/註冊" (Settings/Registration). The left sidebar contains a list of settings categories: 紙張設定 (Paper Settings), 顯示設定 (Display Settings), 定時器設定 (Timer Settings), 網路設定 (Network Settings), 外部介面設定 (External Interface Settings), 可存取性設定 (Accessibility Settings), 音量控制 (Volume Control), 功能設定 (Function Settings), 一般設定 (General Settings), 影印設定 (Copy Settings), 印表機設定 (Printer Settings), and 傳送設定 (Transmission Settings). The main content area is titled "網路設定 - 電子郵件/網際網路傳真設定" (Network Settings - Email/Internet Network Fax Settings). It includes a "編輯..." (Edit...) button highlighted with a red box. Below this, there are sections for "網路設定 - 電子郵件/網際網路傳真設定" (Network Settings - Email/Internet Network Fax Settings) and "認證/加密設定" (Authentication/Encryption Settings). The "網路設定" section includes fields for "SMTP伺服器:" (SMTP Server), "電子郵件位址:" (Email Address), and "POP接收:" (POP Receive) with a "關閉" (Close) button. The "認證/加密設定" section includes checkboxes for "傳送前使用POP認證:" (Use POP authentication before transmission), "SMTP認證(SMTP AUTH):" (SMTP authentication), "使用SMTP的TLS:" (Use TLS for SMTP), and "使用POP的TLS:" (Use TLS for POP), all with "關閉" (Close) buttons. There is also a "清除郵件信箱" (Clear mailbox) section with a "POP伺服器:" (POP Server) field and a "清除" (Clear) button.

17. 必需輸入「SMTP 伺服器」及「電子郵件位址」，按電郵伺服器要求設定「其他認證／加密設定」，然後按「確定」

Enter the "SMTP Server" and "E-Mail address", enter the "Authentication/Encryption Settings" depends on the SMTP server settings if necessary, and then click "OK"

The screenshot shows the web interface of an imageCLASS MF633C/635C printer, specifically the "編輯網路設定 - 電子郵件/網際網路傳真設定" (Edit Network Settings - Email/Internet Network Fax Settings) page. The browser address bar shows the URL 192.168.0.195/tx_email_ifax_edit.html. The page title is "設定/註冊" (Settings/Registration). The left sidebar is the same as in the previous screenshot. The main content area is titled "編輯網路設定 - 電子郵件/網際網路傳真設定" (Edit Network Settings - Email/Internet Network Fax Settings). It includes a message: "變更下列設定。主電源關閉再開啟後，變更將生效。" (Change the following settings. After the main power is closed and restarted, the changes will take effect.) with "確定" (OK) and "取消" (Cancel) buttons. Below this, there are sections for "網路設定 - 電子郵件/網際網路傳真設定" (Network Settings - Email/Internet Network Fax Settings) and "認證/加密設定" (Authentication/Encryption Settings). The "網路設定" section includes fields for "SMTP伺服器:" (SMTP Server) and "電子郵件位址:" (Email Address), which are highlighted with a red box. It also includes fields for "POP伺服器:" (POP Server), "使用者名稱:" (Username), and "密碼:" (Password). There are checkboxes for "設定/變更密碼" (Set/change password), "POP接收" (POP Receive), and "POP間隔:" (POP Interval) with a value of 0 and a unit of "分鐘(0=關閉/1-99)" (Minutes (0=Close/1-99)). The "認證/加密設定" section includes checkboxes for "傳送前使用POP認證" (Use POP authentication before transmission), "使用APOP認證" (Use APOP authentication), and "使用SMTP認證(SMTP AUTH)" (Use SMTP authentication). It also includes fields for "使用者名稱:" (Username) and "密碼:" (Password).


18. 確認設定

Confirm the settings



19. 如要設定傳真轉寄，請按「接收／轉寄設定」，再按「一般設定」

If need to setup FAX forwarding, please click "RX/Forwarding Settings", then click "Common Settings"

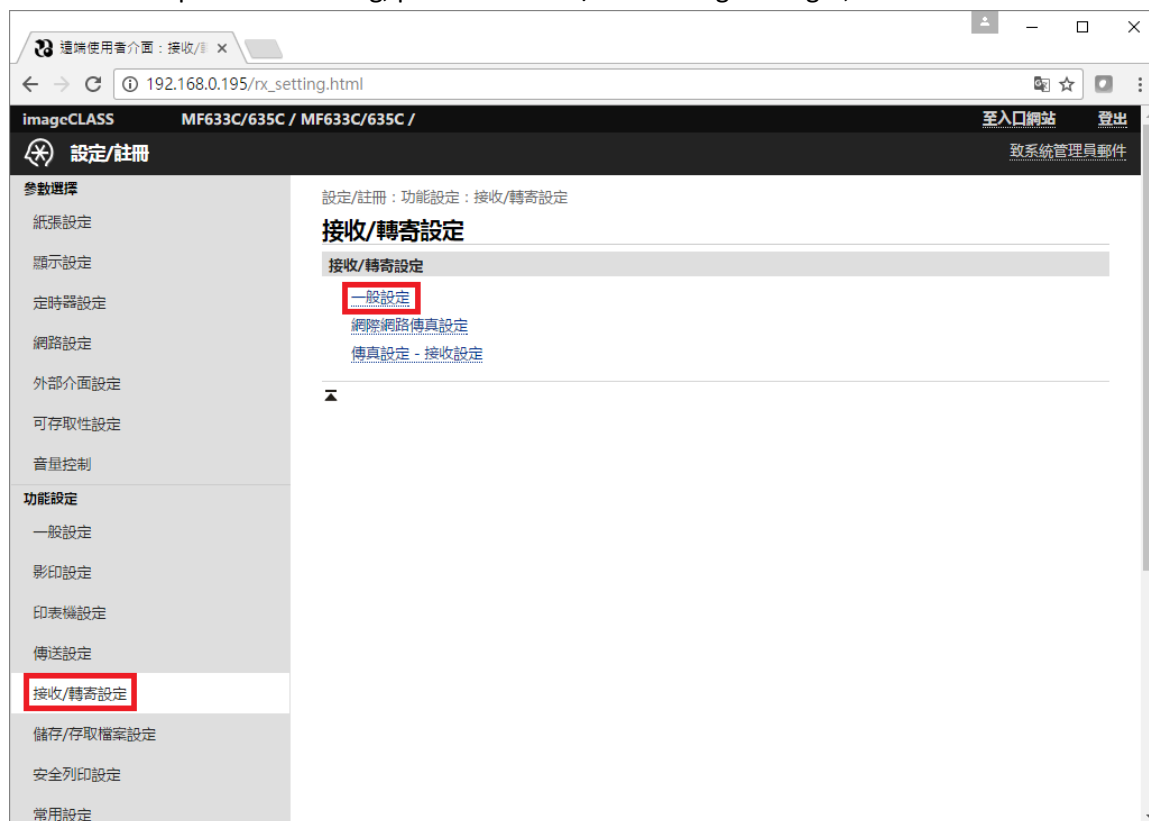


20. 在傳真轉寄設定中，按「編輯」

Click “Edit” in the FAX Forwarding Settings



21. 按「從通訊錄中選擇」

Click “Select from Address Book”

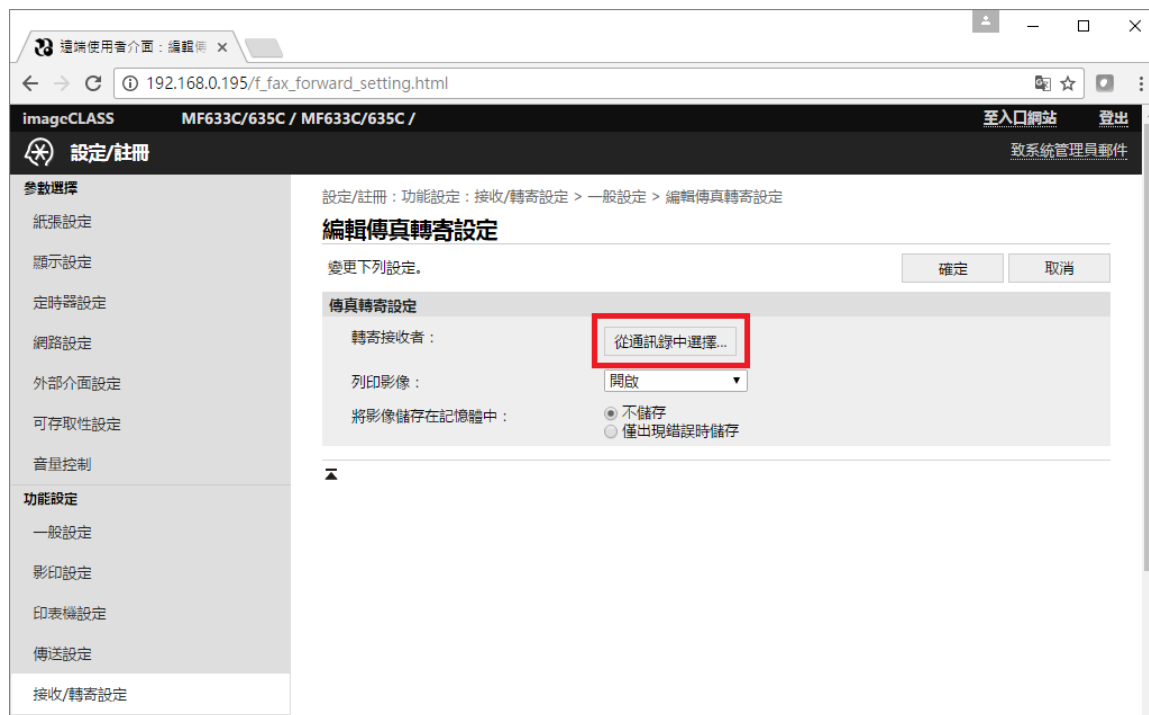


22. 選擇接收者再按「確定」

Choose the recipient and then press “OK”



23. 按「確定」完成設定

Press “OK” to finish the settings

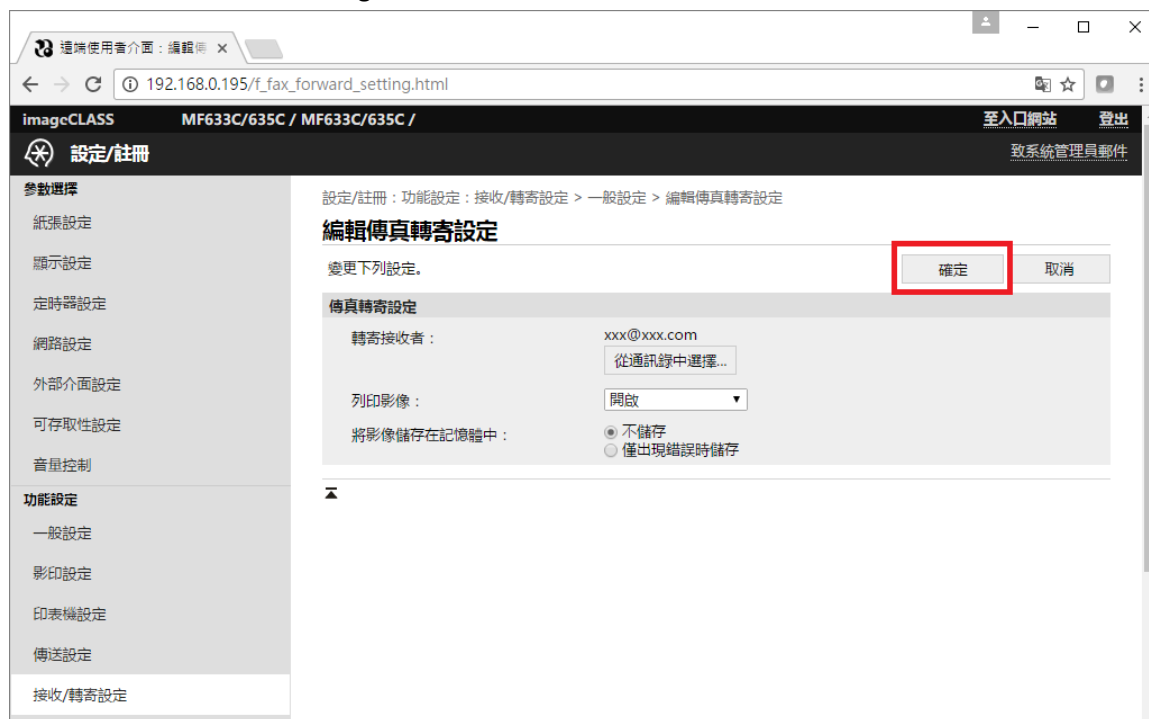

-完-

-End-