


Mac OS 變更打印機預設設定值的方法


How to change printer default settings for Mac OS

1. 開啟瀏覽器並輸入 <http://127.0.0.1:631/printers>
In a Browser, go to web page <http://127.0.0.1:631/printers>

- 若出現以下畫面，請[按此](#)到步驟 6 繼續
- If display screen below, please [click here](#) to step 6 to continue

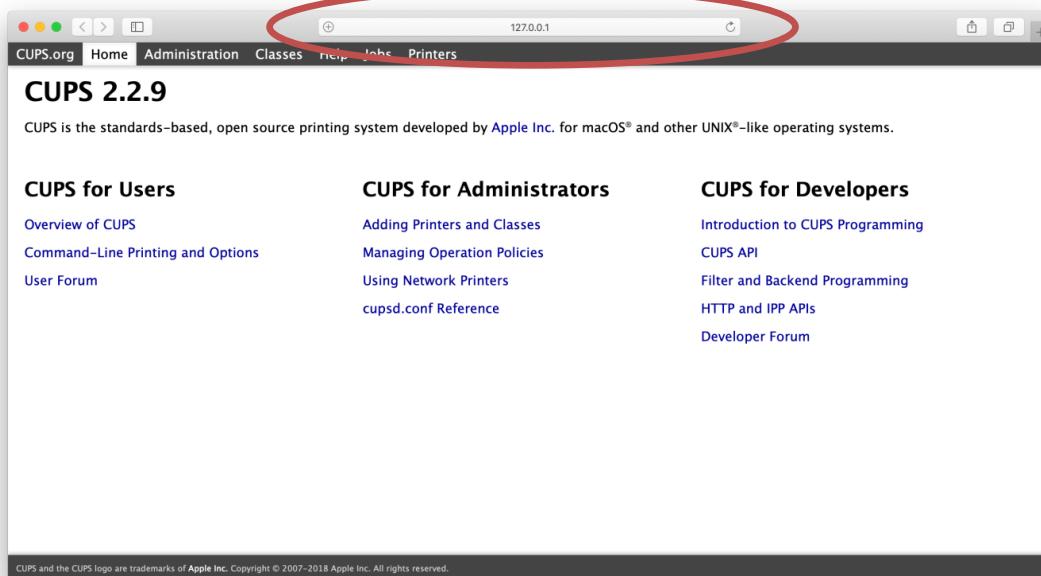

- 若出現以下畫面，請[按此](#)繼續
- If display screen below, please [click here](#) to continue

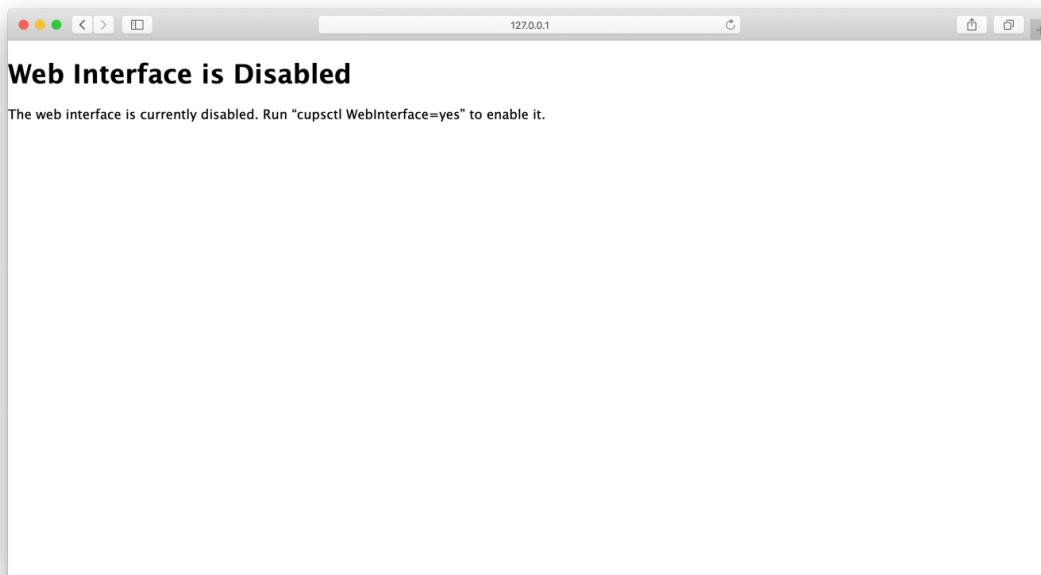


2. 先選擇“Finder”

Choose “Finder”




3. 然後選擇“應用程式”->“工具程式”

Choose “Application” -> “Utility”

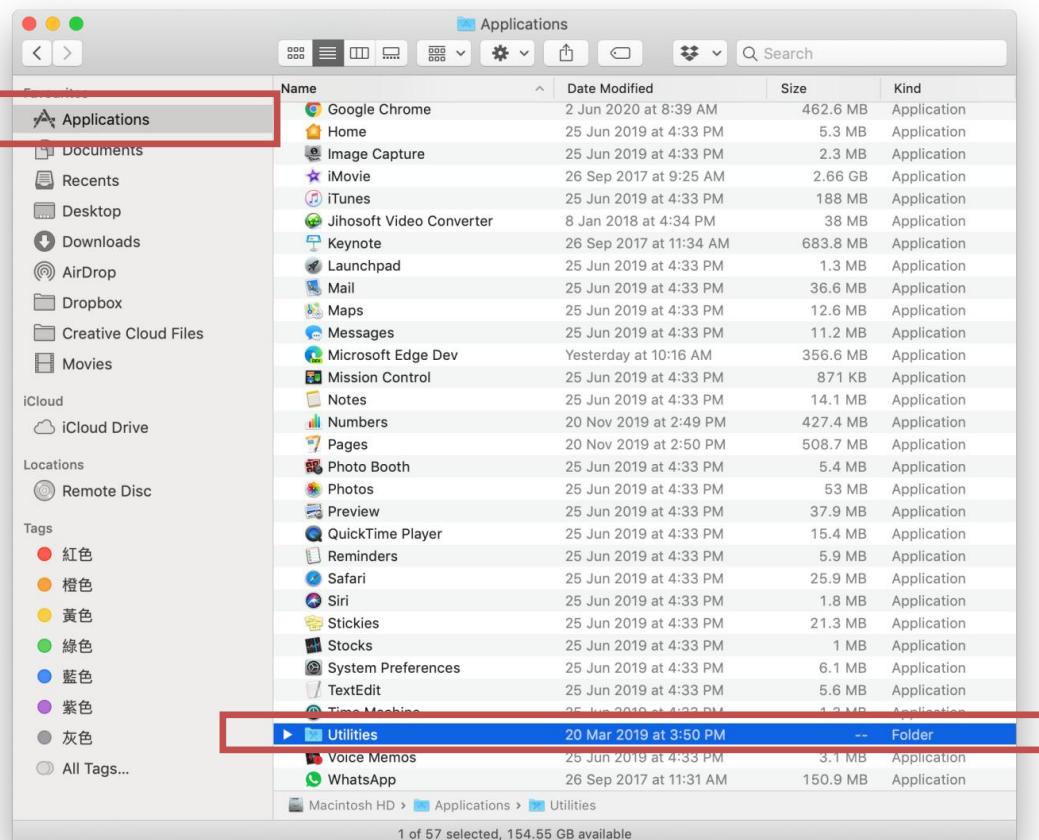

4. 選擇“終端機”
Choose “Terminal”

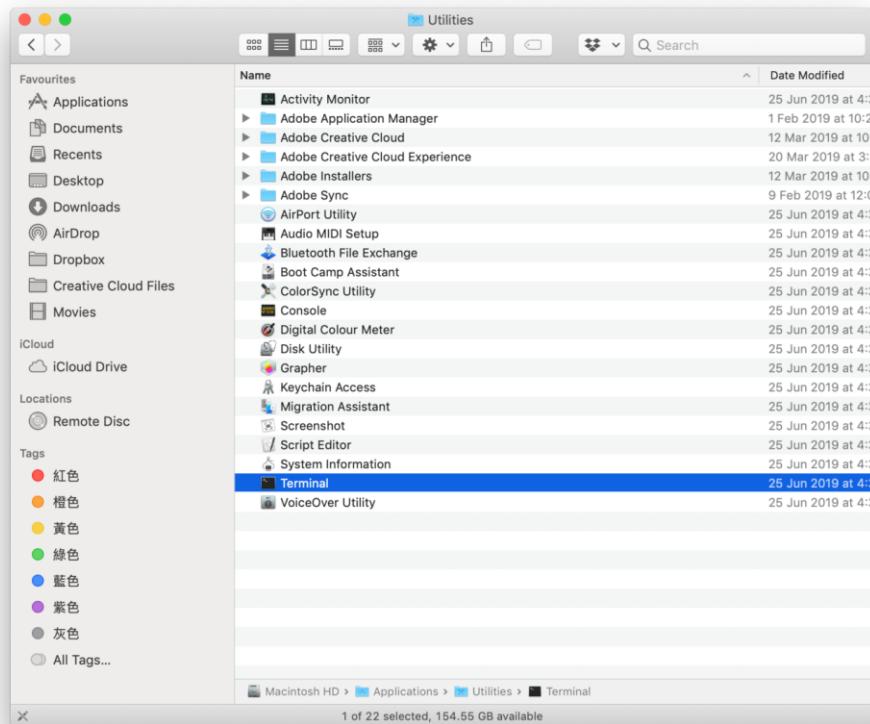

5. 於終端機中輸入“cupsctl Webinterface=Yes”
Key in “cupsctl Webinterface=Yes”

A screenshot of a terminal window titled 'callcenter — bash — 80x24'. The prompt is 'Apples-MacBook-Pro:~ callcenter\$'. The command 'cupsctl Webinterface=Yes' is typed into the terminal. The window has a light gray background and a dark gray title bar.

6. 開啟設定網頁後選擇 “Printers”

Choose “Printers” after open the settings page

CUPS 2.2.9

CUPS is the standards-based, open source printing system developed by [Apple Inc.](#) for macOS® and other UNIX®-like operating systems.

CUPS for Users

- [Overview of CUPS](#)
- [Command-Line Printing and Options](#)
- [User Forum](#)

CUPS for Administrators

- [Adding Printers and Classes](#)
- [Managing Operation Policies](#)
- [Using Network Printers](#)
- [cupsd.conf Reference](#)

CUPS for Developers

- [Introduction to CUPS Programming](#)
- [CUPS API](#)
- [Filter and Backend Programming](#)
- [HTTP and IPP APIs](#)
- [Developer Forum](#)

CUPS and the CUPS logo are trademarks of Apple Inc. Copyright © 2007–2018 Apple Inc. All rights reserved.

7. 選擇印表機型號

Choose printer model

Printer Name	Model	Driver	Status
Canon_MF240_Series_UFRII_LT	Canon MF240 Series UFRII LT	Apple's MacBook Pro	CNMF240 Series-AirPrint Idle
Canon_MF240_Series_UFRII_LT_Fax	Canon MF240 Series UFRII LT - Fax	Apple's MacBook Pro	CNMF240 Series-AirPrint Idle
Canon_MF720C_Series_e9_19_4c_	Canon MF720C Series (e9:19:4c)		Canon MF720C Series Idle
Canon_MF720C_Series_e9_19_4c_2	Canon MF720C Series (e9:19:4c) 2		Canon MF720C Series Idle
Canon_MF720C_Series_e9_19_4c_3	Canon MF720C Series (e9:19:4c) 3		Canon MF720C Series Idle
Canon_MF720C_Series_e9_19_4c_4_Fax	Canon MF720C Series (e9:19:4c) - Fax		CNMF720C Series-AirPrint Idle
Canon_MF732C_734C_735C	Canon MF732C/734C/735C		CNMF732C/734C/735C-AirPrint Idle
Canon_MF732C_734C_735C_2			CNMF732C/734C/735C-AirPrint Idle
Canon_MF732C_734C_735C_3			CNMF732C/734C/735C-AirPrint Idle
Canon_MF732C_734C_735C_FAX	Canon MF732C/734C/735C FAX	Apple's MacBook Pro	Canon MF732C/734C/735C FAX Idle
Canon_MF732C_734C_735C_UFR_II	Canon MF732C/734C/735C UFR II	Apple's MacBook Pro	Canon MF732C/734C/735C Idle
Canon_MF8200C_Series	Canon MF8200C Series		Canon MF8200C Series Idle
Canon_MG3600_series	Canon MG3600 series		Canon MG3600 series-AirPrint Idle
Canon_MG3600_series_2	Canon MG3600 series 2		Canon MG3600 series Idle
Canon_MG3600_series_3	Canon MG3600 series 3	Apple's MacBook Pro	Canon MG3600 series Idle
Canon_MG3600_series_4	Canon MG3600 series 4	Apple's MacBook Pro	Canon MG3600 series-AirPrint Idle
		Apple's MacBook Pro	Canon MC7700 series Idle

CUPS and the CUPS logo are trademarks of Apple Inc. Copyright © 2007–2018 Apple Inc. All rights reserved.

8. 選擇“Set Default Option”

Choose “Set Default Option”

CUPS.org Home Administration Classes Help Jobs Printers

Canon_MF240_Series_UFRII_LT

Canon_MF240_Series_UFRII_LT (Idle, Accepting Jobs, Not Shared)

Maintenance ✓ Administration
Description: UFRII LT
Location: Set Default Options (UFRII LT)
Driver: Set As Server Default
Connection: Set Allowed Users
Defaults: job-sheets=none, none media=iso_a4_210x297mm sides=two-sided-long-edge

Jobs

Search in Canon_MF240_Series_UFRII_LT: Search Clear

Show Completed Jobs Show All Jobs

Jobs listed in print order; held jobs appear first.

CUPS and the CUPS logo are trademarks of Apple Inc. Copyright © 2007–2018 Apple Inc. All rights reserved.

9. 選擇相關設定，然後按“Set Default Options”

Choose the printing setting, then click “Set Default Options”

CUPS.org Home Administration Classes Help Jobs Printers

Set Printer Options

Set Default Options for Canon_MF732C_734C_735C

General **Banners** **Policies**

General

Collate: No
Color Mode: Color
2-Sided Printing: Long-Edge (Portrait)
Media Size: A4
Media Source: Auto Select

Set Default Options

CUPS and the CUPS logo are trademarks of Apple Inc. Copyright © 2007–2018 Apple Inc. All rights reserved.

- 完 -

- End -