

在 Windows 以 Wi-Fi 連接安裝 E470 驅動程式步驟

E470 printer driver Installation Guide for Windows via Wi-Fi

***請確保電腦已連接互聯網**

***Please make sure computer already connected to the internet**

以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。

The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.

下載及安裝步驟

Download and Installation procedure

點擊以下連結下載有關之驅動程式：

Click below link to download printer driver:

<http://ij.start.canon/e470>

1. 按一下“下載”，下載完成後開啟該檔案安裝

Click “Download”, and open the file after download completed

2. 按“開始設定”

Click “Start Setup”



3. 選擇“亞洲”、“中國香港特別行政區”，按“下一步”

Select “Asia”, “Hong Kong SAR China”, and click “Next”

The screenshot shows a software installation window with a progress bar at the top indicating four steps. Step 1, '選擇國家或地區' (Select Country or Region), is active. Below the title, it says '選擇居住地。' (Select your residence). A dropdown menu is open, showing a list of countries and regions. '中國香港特別行政區' (Hong Kong SAR China) is highlighted in blue. Other visible options include 中國, 印度, 印度尼西亞, 日本, 韓國, 馬來西亞, 菲律賓, 新加坡, 台灣, 泰國, and 澳門. At the bottom, there are two buttons: '上一步' (Previous) and '下一步' (Next).

4. 按“是”

Click “Yes”

The screenshot shows a software installation window with a progress bar at the top indicating four steps. Step 2, '許可協定' (License Agreement), is active. Below the title, it says '請在安裝 Canon 產品 前，仔細閱讀下面許可協定。' (Please read the following license agreement before installing Canon products). A large text area contains the '終端使用者授權合約' (End User License Agreement). The text includes a note to read the file and a detailed description of the agreement between the user and Canon Inc. regarding software, drivers, and content. At the bottom, there are three buttons: '上一步' (Previous), '否' (No), and '是' (Yes).

5. 可選擇是否同意作傳送資訊至 Canon Extended Survey Program

Select “Agree” or “Disagree” to send information to Canon Extended Survey Program

Extended Survey Program

為了使產品的開發與銷售更好地滿足用戶的需求，Canon 需要與您的 Canon 產品相關的以下資訊，然後透過網際網路傳送至 Canon (如果在中國使用 Canon 產品，傳送至法定研究機構)。

與 Canon II 印表機/掃描器/傳真機有關的資訊

- 裝置作業系統版本、語言和顯示設定資訊
- 裝置驅動程式和應用程式軟體使用記錄
- 印表機 ID 號碼、安裝日期和時間、已安裝墨水的類型、墨水使用資訊、已列印的頁數、掃描次數和維護資訊
- 紙張使用資訊、列印環境/條件、掃描作業設定和問卷結果

(根據所用型號的不同，可能不會傳送上述某些資訊。)

如果您的 Canon 產品為共同使用，共用產品中記錄的上述資訊將會被傳送。如果您同意，請將該事實傳播給與之共用產品的使用者並預先獲得其同意。

如果同意上述資訊，按一下 [同意] 以開始安裝調查程式。否則，請按一下 [不同意]。該程式可能無法在不支援的作業系統版本上運行。

上一步 不同意 同意

6. 勾選“停用封鎖”，按“下一步”

Select “Deactivate the block”, and click “Next”

防火牆設定

必須在 Windows 防火牆功能中停用對本軟體的封鎖。

☒ 停用封鎖

下一步


7. 選擇“無線 LAN 連接”，按“下一步”

Select “Wireless LAN Connection”, and click “Next”



8. 確定印表機已開啟，然後按“下一步”

Make sure printer is on, and click “Next”

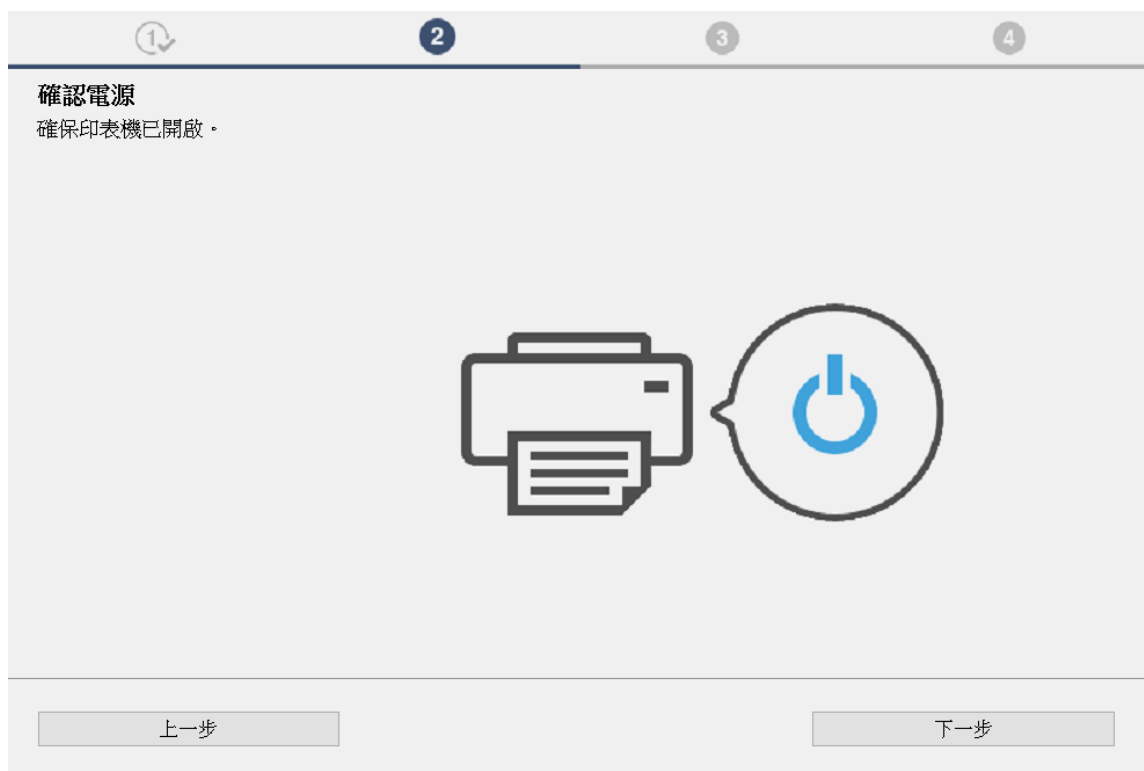

9. 如清單上有印表機，點選印表機後按“下一步”，然後跳至[步驟 22](#)。如清單上沒有印表機，則繼續下一步驟

If printer is on the list, select the printer, click “Next”, and then jump to [step 22](#). Otherwise, go to next step

選擇印表機

☒ 從清單中選擇
可以在保固卡和印表機上找到序號。

IPv4 裝置 IPv6 裝置

產品名稱	序號(最後 5 位數)	IP 位址	MAC 位址
✓ ----- series	*****	192.168.0.179	*****1E730D

序號位置 更新

☐ 指定 IP 位址並執行搜尋

☐ 根據指南設定網路連接
如果清單中未顯示印表機，或如果無法透過指定 IP 位址找到印表機，請選擇該選項。

返回初始介面 下一步

10. 確認已點選“根據指南設定網路連接”，然後按“下一步”

Make sure “Set up the network connection according to the guide” is selected, and click “Next”

選擇印表機

☐ 從清單中選擇
可以在保固卡和印表機上找到序號。

IPv4 裝置 IPv6 裝置

產品名稱	序號(最後 5 位數)	IP 位址	MAC 位址


序號位置 更新

☐ 指定 IP 位址並執行搜尋


☒ 根據指南設定網路連接
如果清單中未顯示印表機，或如果無法透過指定 IP 位址找到印表機，請選擇該選項。

返回初始介面 下一步

11. 如印表機上 Wi-Fi 指示燈閃爍，按印表機上停止 “Stop” 按鈕一下，然後按 “下一步”
If the Wi-Fi lamp on the printer is flashing, press the “Stop” button one time. Click “Next”

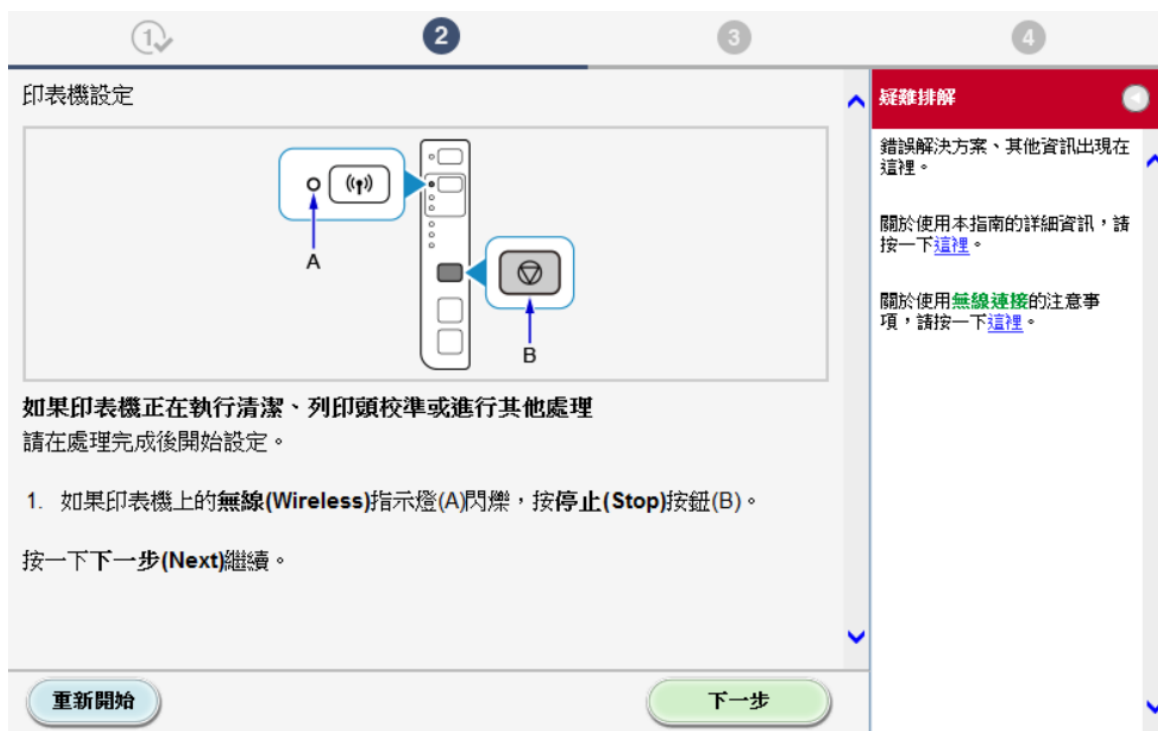

12. 請跳過此步驟，按 “下一步”
Please skip this step, and click “Next”

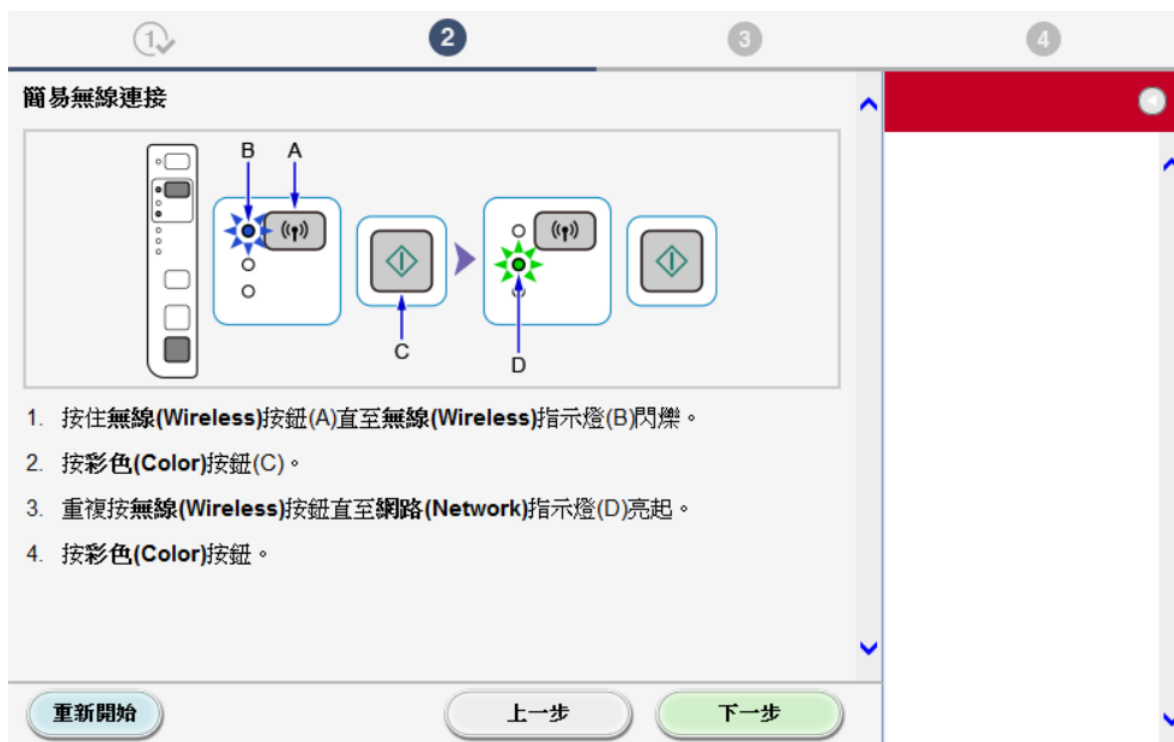


13. 請跳過此步驟，按“下一步”

Please skip this step, and click “Next”



14. 請等待完成印表機網路設定

Please wait for the completion of printer wireless setup

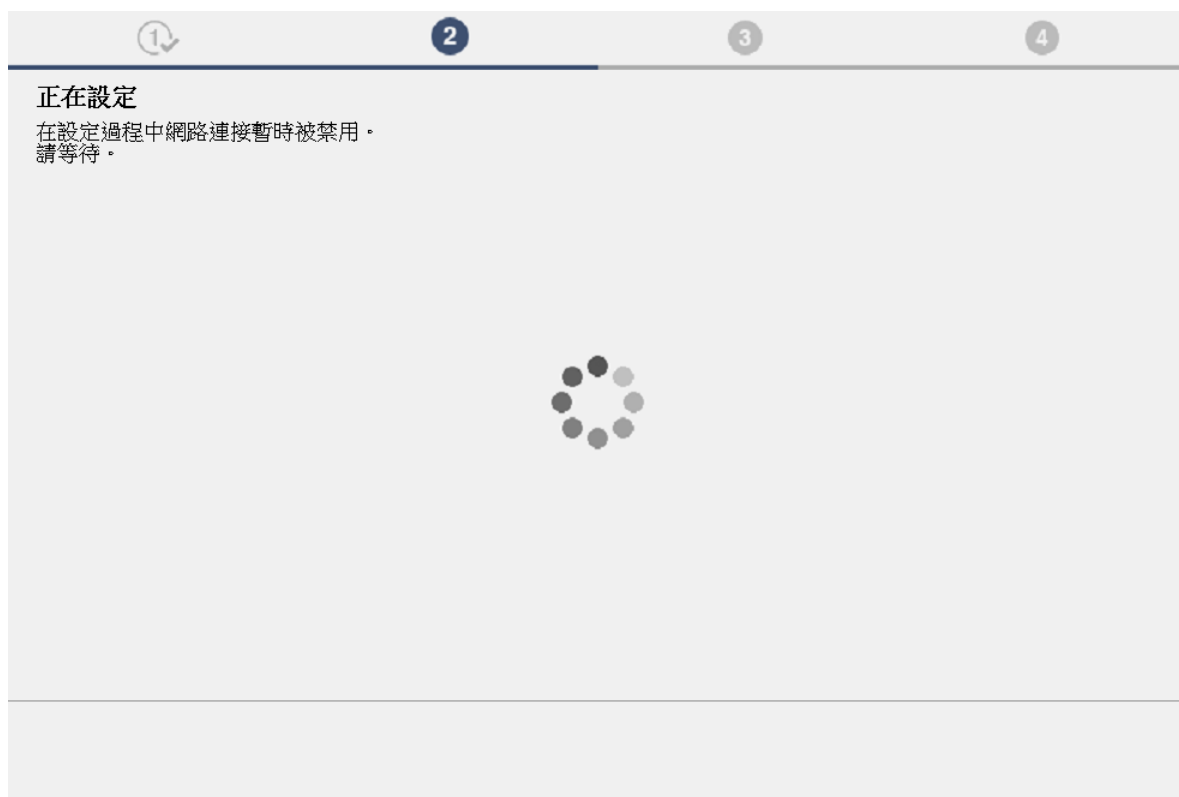


15. 按“下一步”

Click “Next”




16. 如印表機上 Wi-Fi 指示燈閃爍，按印表機上停止“Stop”按鈕一下，然後按“下一步”

If the Wi-Fi lamp on the printer is flashing, press the “Stop” button one time. Click “Next”

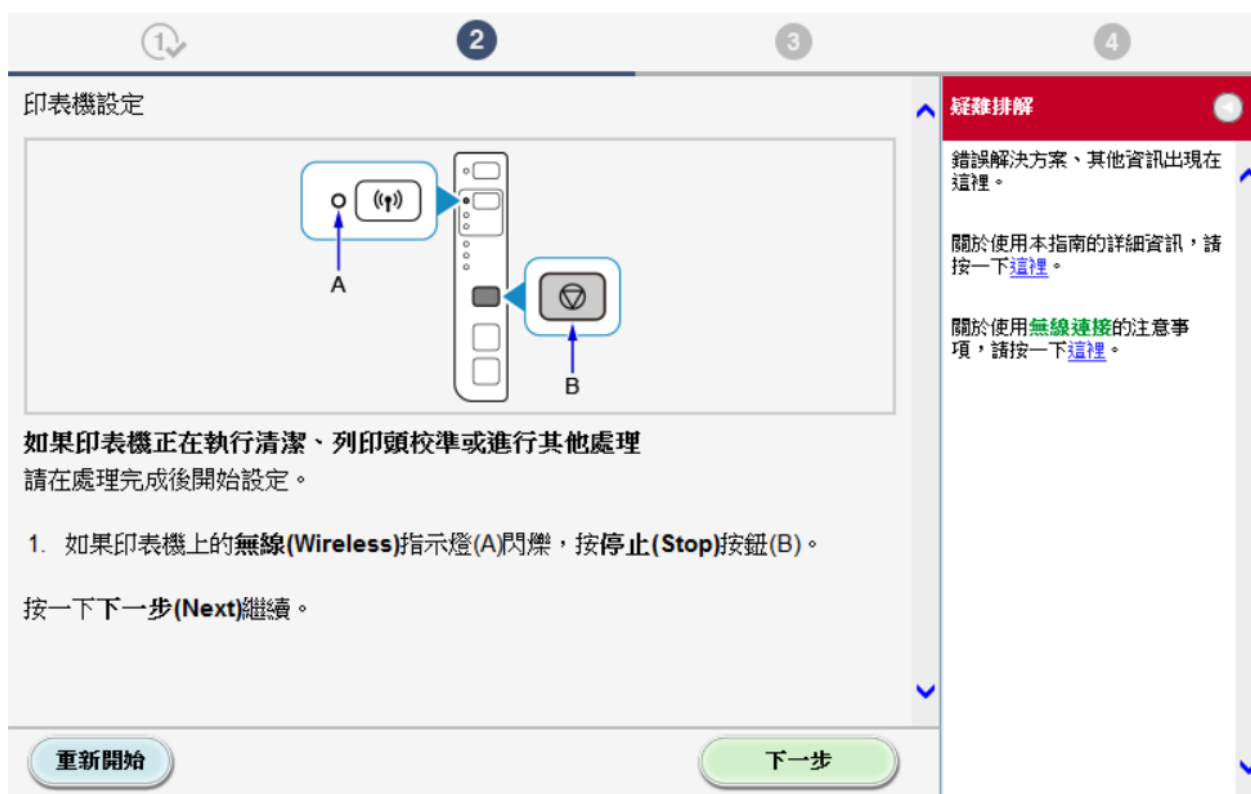

17. 按“使用 USB 電纜線的無線設定”

Click “Wireless Setup Using the USB Cable”

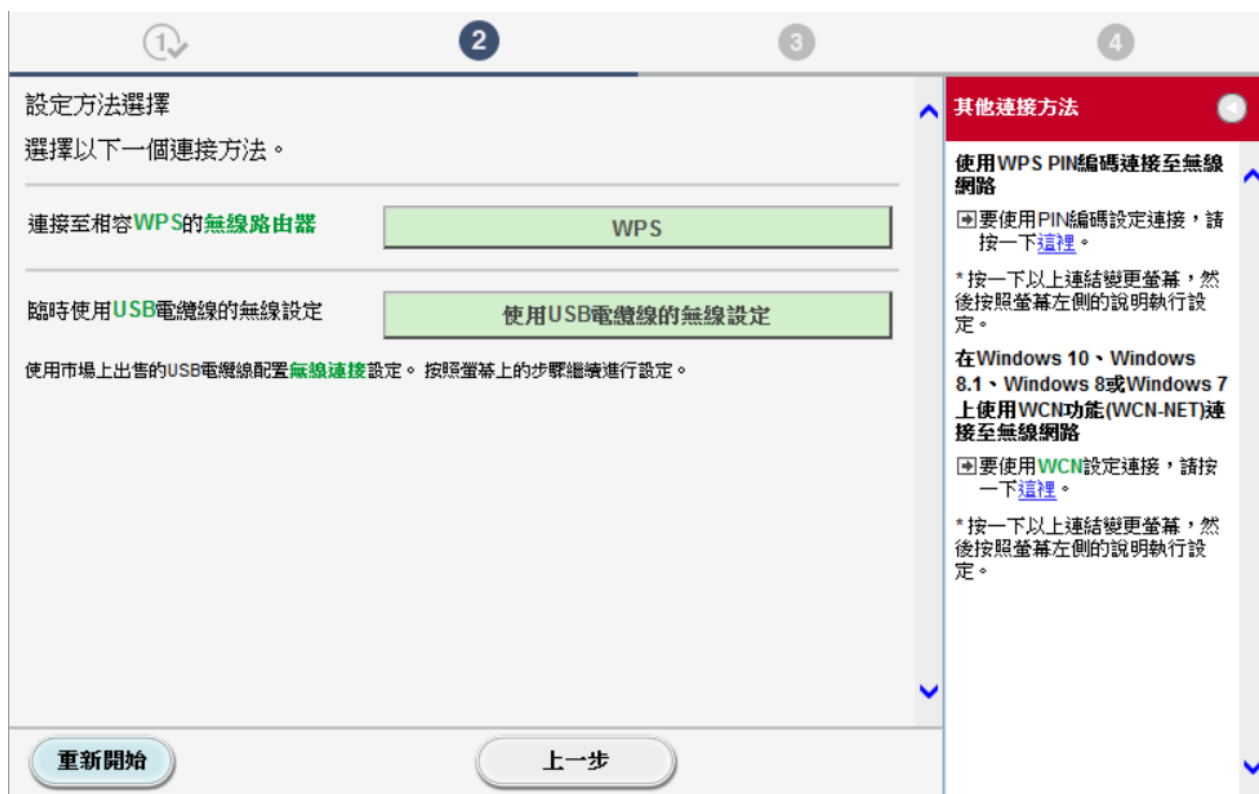


18. 將印表機以 USB 線連接電腦，並確保印表機電源已開啟

Connect printer and computer with USB cable, and make sure the printer is on




19. 請等等

Please Wait

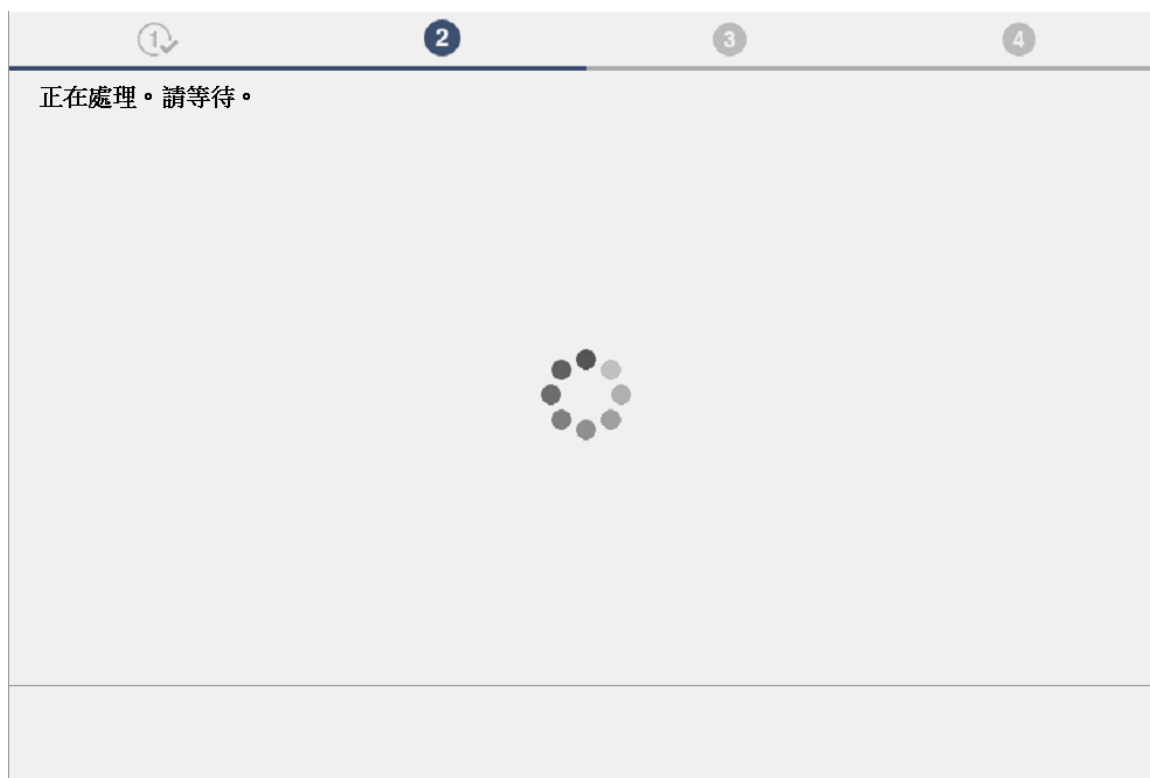

20. 連接已完成，按“下一步”

Connection is completed, and click “Next”

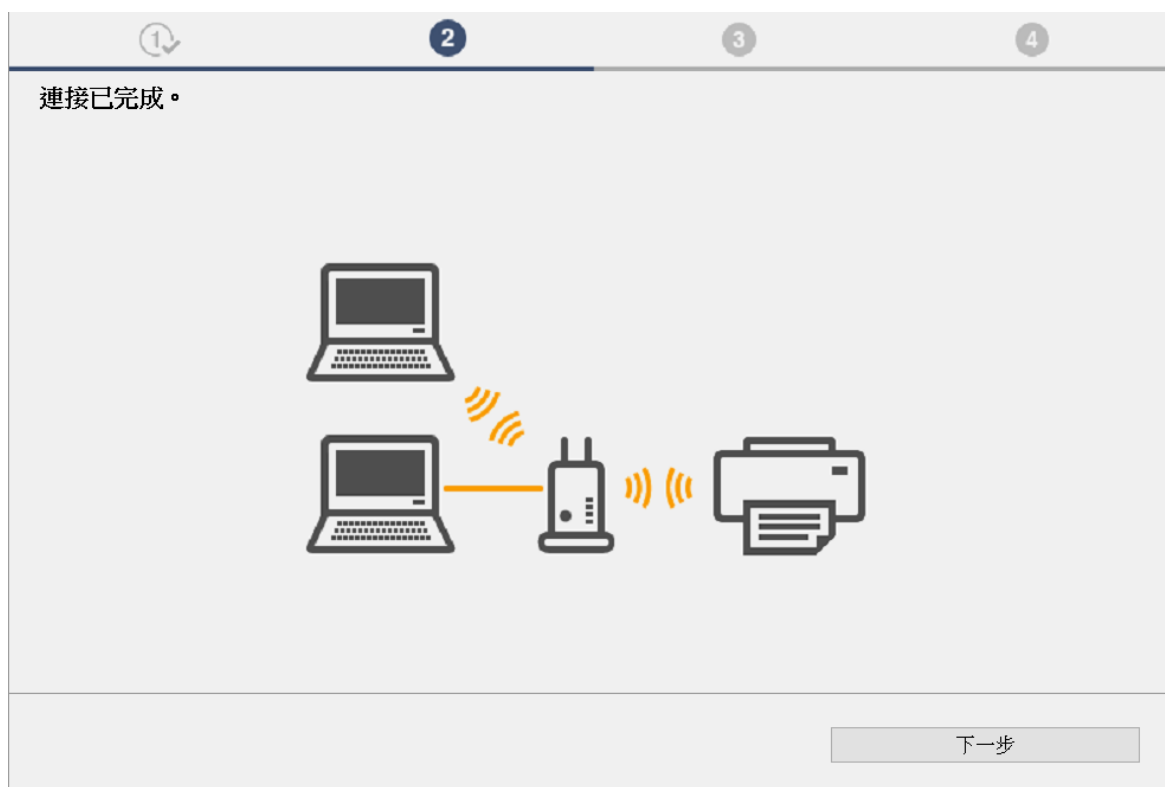

21. 如果 USB 電纜線連接到印表機，拔除電纜線，然後按“下一步”

If the USB cable is connected to the printer, disconnect it, and then click “Next”



22. 請等待安裝精靈完成印表機驅動程式安裝

Please wait for setup wizard to accomplish the printer driver installation



23. 按“執行”進行列印頭校準，然後按“下一步”或直接按“下一步”跳過此步驟

Click “Execute” for Print Head Alignment, then click “Next” or click “Next” directly to skip this step



24. 按“執行”列印測試頁，然後按“下一步”或直接按“下一步”跳過此步驟

Click “Execute” for printing a test page, then click “Next” or click “Next” directly to skip this step



25. 驅動程式安裝完成，建議勾選“設定為預設印表機”，按“下一步”

Driver installation is completed. We recommend you to select “Set as default printer”, and click “Next”



26. 勾選所需軟件，按“下一步”

Select needed software, and click “Next”



27. 按“下一步”

Click “Next”



28. 安裝成功，然後按“結束”

Installation is completed, then click “Finish”



-完-

-End-