






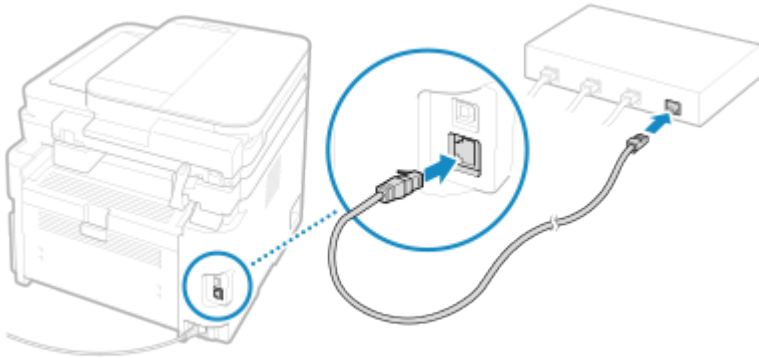


MF264dw II 在 Windows 透過 LAN 連線連接印表機之驅動程式步驟
Driver installation procedure for MF264dw II in Windows via Wired LAN

先將印表機連接到網路，詳細可參考以下步驟

Connect printer to network first, please refer to following procedure

1. 開啟印表機
Turn on the printer
2. 在控制面板上，按下[功能表]  鍵
On the control panel, press [Menu]  key
3. 按下 [參數選擇]  [網路]  [選擇有線/無線區域網路] 
Press [Preferences]  [Network]  [Select Wired/Wireless LAN] 
4. 選擇 [有線區域網路] 再按 
Select [Wired LAN] and press 
5. 使用區域網路纜線將本機連接到路由器，推入接頭，直至聽到喀嗒聲
Connect the machine to router by using a LAN cable, push the connector in until it clicks into place



等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until IP address settings of the machine complete


下載及安裝步驟

Driver download and Installation procedure

6. 到以下網站下載印表機的驅動程式及掃描軟件
Go to below URL then download the printer driver and scanner software
<https://hk.canon/en/support/imageclass%20mf264dw%20ii/model>


7. 選擇並下載以下檔案：
Choose and download below files:

- 打印機驅動程式 / Printer Driver

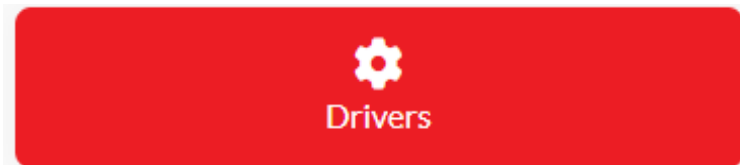

[Windows **bit] MF269dw II/ MF266dn II/ MF264dw II MFDrivers (Generic Plus UFR II / Generic Plus PCL6 / Generic FAX / ScanGear)

- 掃描軟件 / Scanning Software

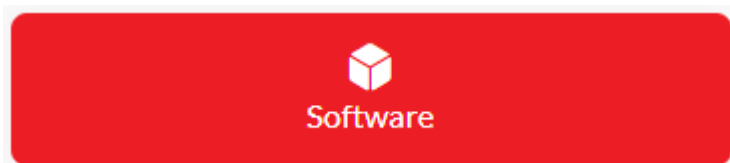


[Windows 32bit & 64bit] MF Scan Utility Ver. *.*

8. 執行檔案 [MF260IIMFDriverVXXXXXX.exe] 按 「下一步」
Run File [MF260IIMFDriverVXXXXXX.exe], click “Next”




9. 按 「是」
Click “Yes”

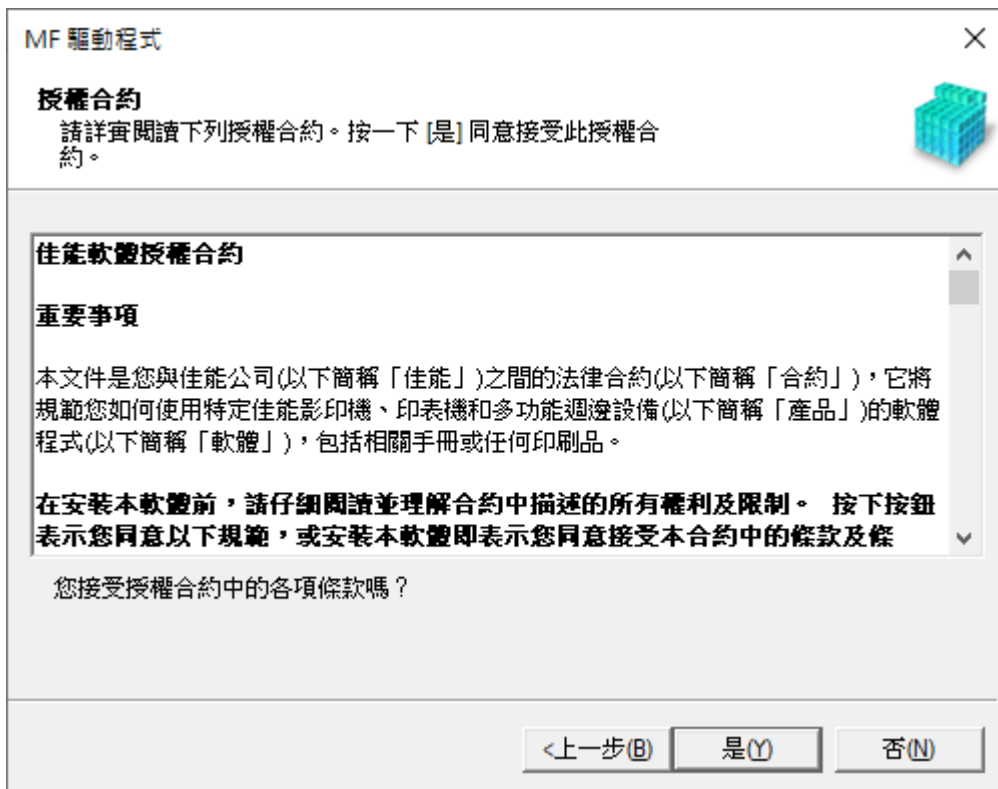

10. 選擇「網路連線(適用於網路型號)」，按「下一步」
 Choose “Network connection (for Network Models)”, click “Next”



11. 程式會自動偵測網絡上的印表機，選擇後按「下一步」
 Program will automatic detect the network printer, choose printer and click “Next”

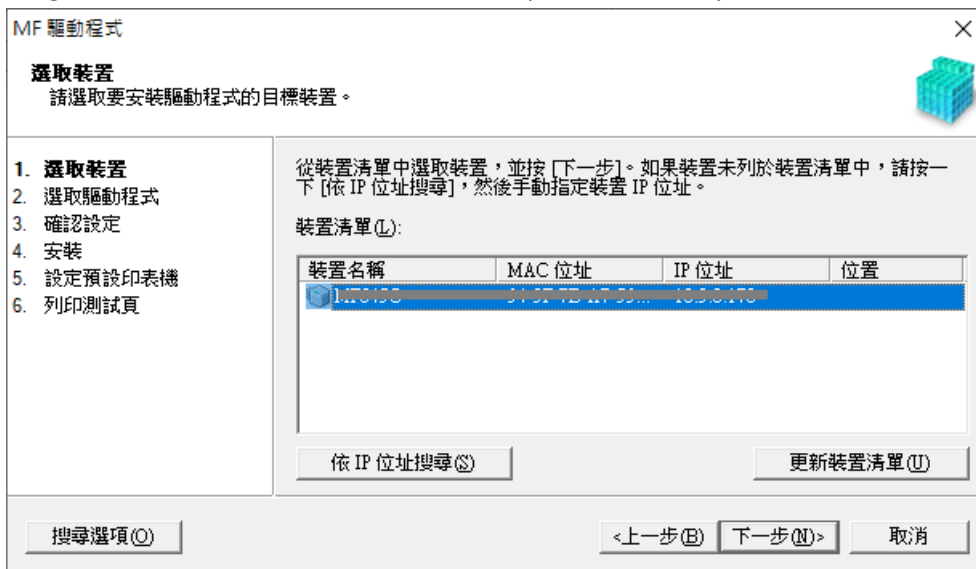

12. 按「下一步」

Click "Next"

MF 驅動程式

選取驅動程式
請選取所要安裝的驅動程式。

1. 選取裝置
2. **選取驅動程式**
3. 確認設定
4. 安裝
5. 設定預設印表機
6. 列印測試頁

目標裝置

要安裝的驅動程式:

印表機 (P)
 傳真(適用於受支援的型號) (F)
 掃描器 (S)
 Canon Driver Information Assist Service (C)

安裝此服務並使用共用或本機印表機時，可讓您取得裝置資訊的功能將會新增到您的電腦。

< 上一步 (B) 下一步 (N) > 取消

13. 按「下一步」

Click "Next"

MF 驅動程式

選取驅動程式
請選取所要安裝的驅動程式。

1. 選取裝置
2. **選取驅動程式**
3. 確認設定
4. 安裝
5. 設定預設印表機
6. 列印測試頁

目標裝置

要安裝的印表機驅動程式:

Generic Plus UFR II 印表機驅動程式 (U)
 Generic Plus PCL6 印表機驅動程式 (P)
 Generic Plus PS3 印表機驅動程式 (S)

< 上一步 (B) 下一步 (N) > 取消

14. 按「下一步」

Click "Next"

MF 驅動程式

確認設定
確認下列設定明細。

1. 選取裝置
2. 選取驅動程式
3. **確認設定**
4. 安裝
5. 設定預設印表機
6. 列印測試頁

您可以變更印表機名稱。若將此印表機指定為共用印表機，即可指定共用印表機名稱，以及設定其他驅動程式 (替代驅動程式)。
請確認設定，然後按 [下一步]。

印表機

連接埠: CNMFNP [redacted]
驅動程式: Canon Generic Plus UFR II V250
印表機名稱(P): [Canon [redacted] UFR II]

作為共用印表機(U)

共用名稱(S): [redacted]

要新增的驅動程式(D)...

目前的裝置: 1
要設定的裝置數: 2

<上一步(B) 下一步(N)> 取消

15. 按「啟動」

Click "Start"

MF 驅動程式

確認設定
安裝程式將以下列設定安裝驅動程式。

1. 選取裝置
2. 選取驅動程式
3. **確認設定**
4. 安裝
5. 設定預設印表機
6. 列印測試頁

確認設定，然後按一下 [啟動]，以開始進行安裝。


要安裝的項目:

連接埠: CNMFNP [redacted]
印表機: Canon [redacted] UFR II
驅動程式: Canon Generic Plus UFR II V250
連接埠: CNMFNPSCAN [redacted]
掃描器: Canon [redacted]
驅動程式: Canon [redacted]

<上一步(B) 啟動(S) 取消


16. 等待安裝程序完成

Waiting for the installation progress

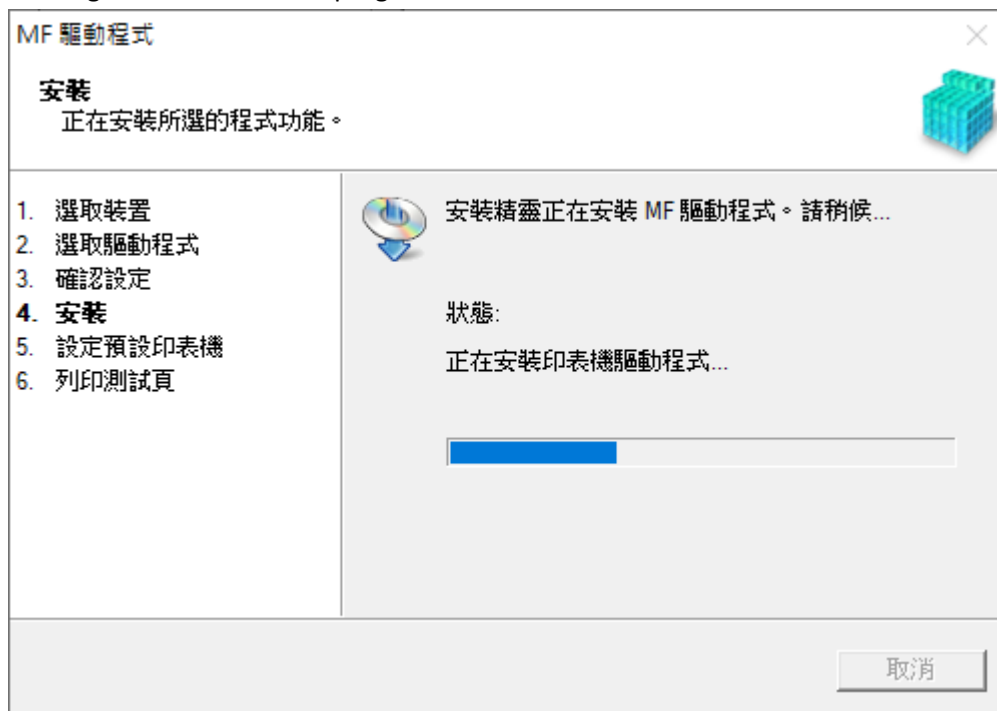


17. 選擇打印機，然後按「下一步」

Choose printer, then click "Next"

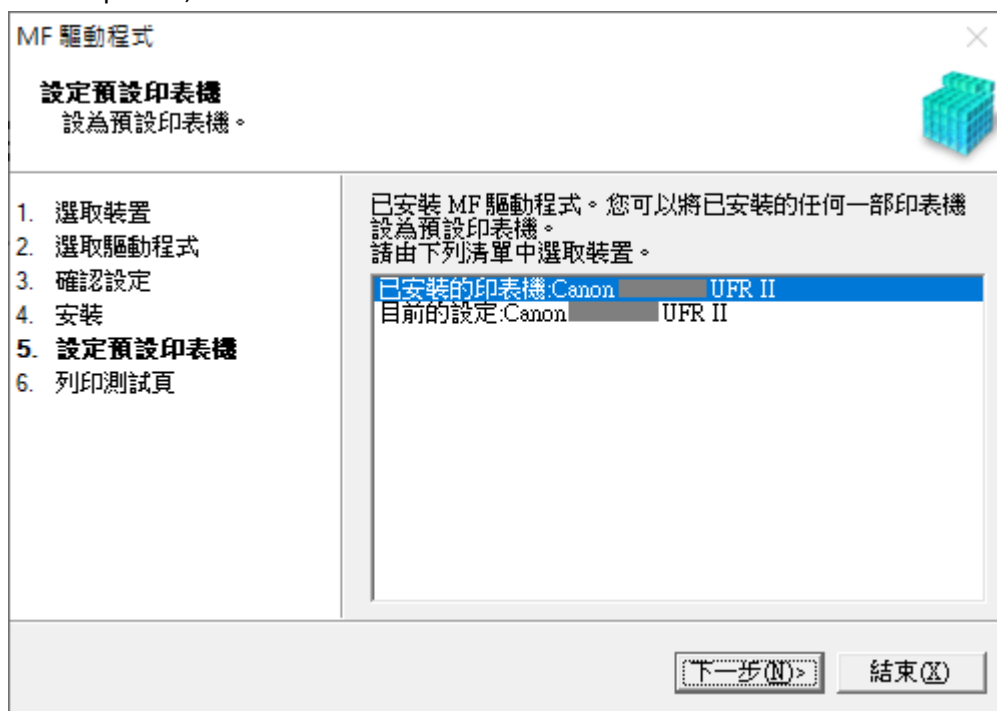


18. 按「結束」

Click "Exit"

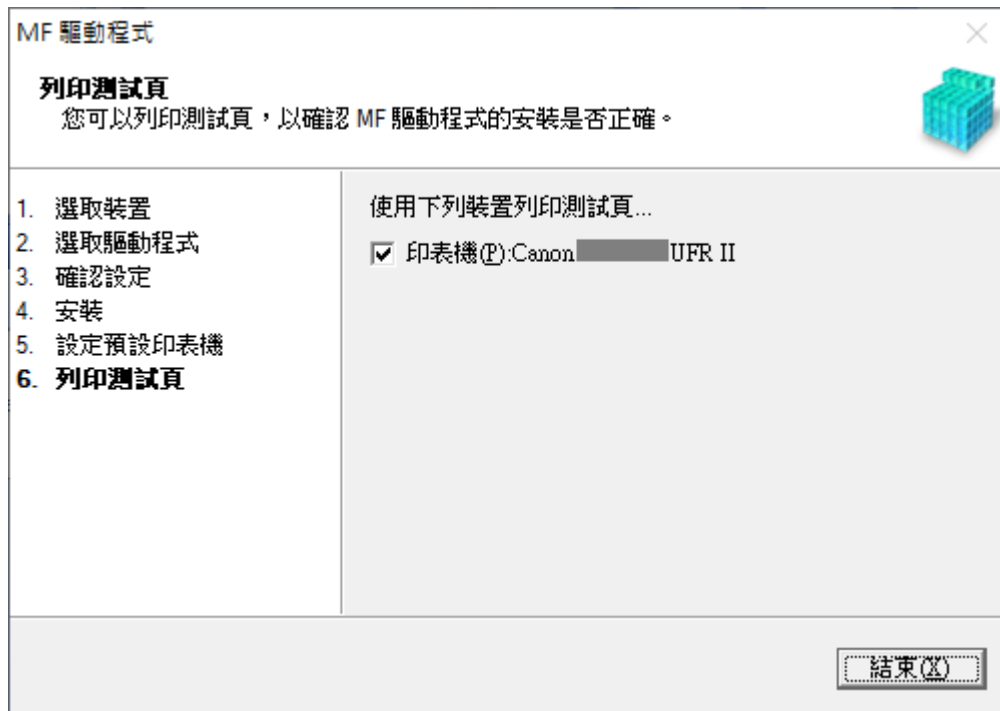


安裝掃描軟件MF Scan Utility
MF Scan Utility installation procedure

19. 執行檔案 [winmfscanutilityvxxxx.exe] 按「下一步」
Run the file [winmfscanutilityvxxxx.exe], click "Next"

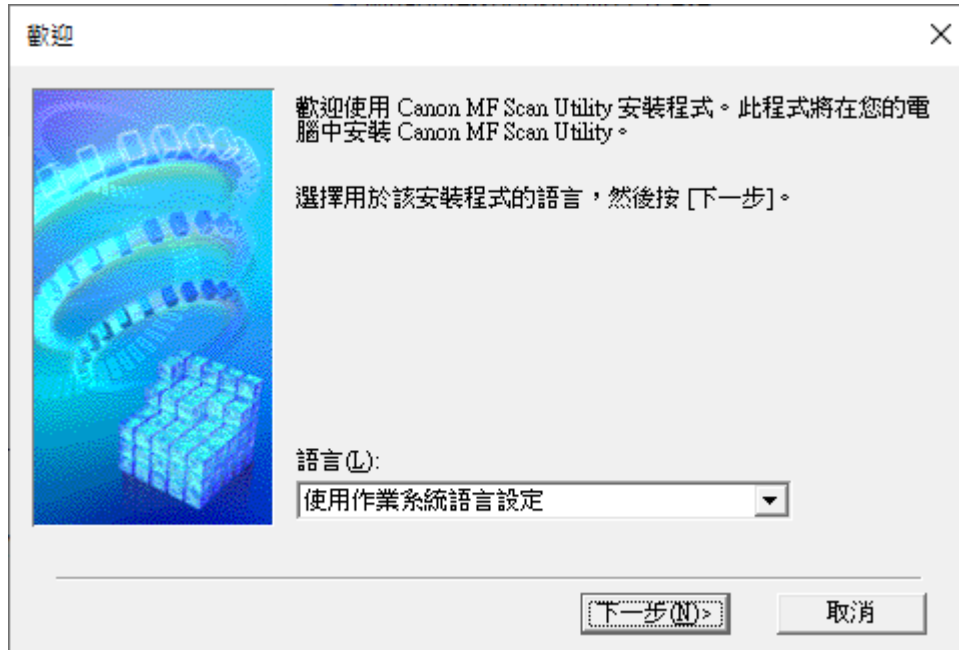


20. 按「是」
Click "Yes"

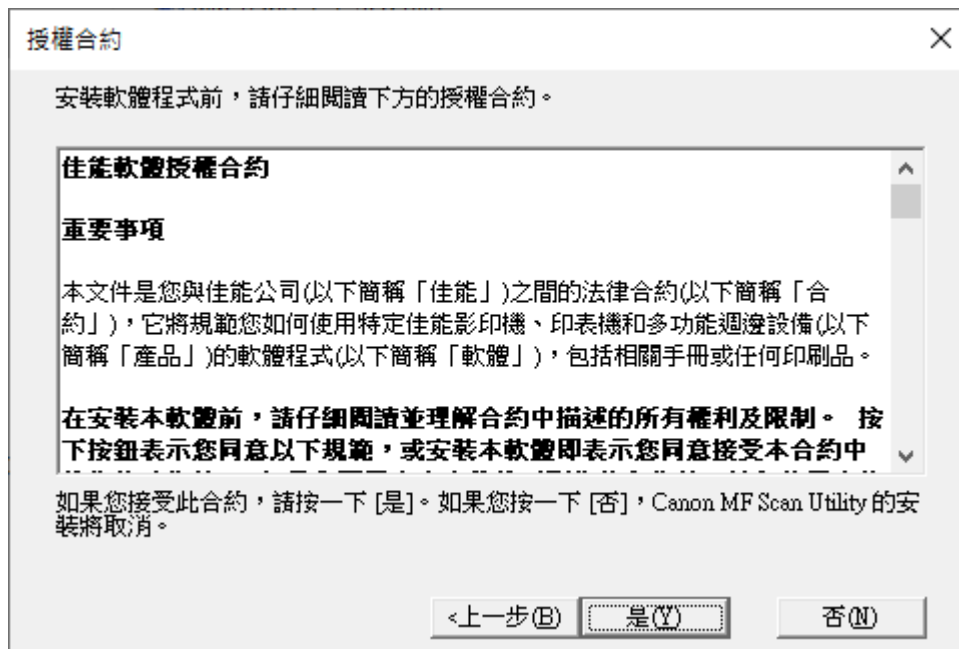

21. 等待安裝程序完成

Waiting for the installation progress

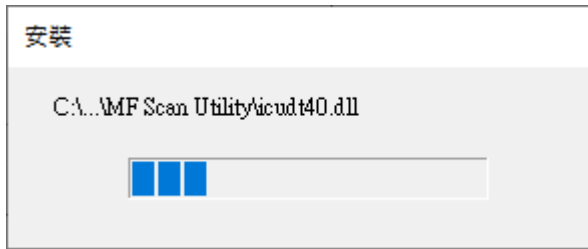

22. 按「完成」結束安裝

Click "Complete" to finish installation



-完-
-End-