

在 Windows 以無線方式安裝及連接 PIXMA G3730 打印機

Installing PIXMA G3730 on Windows via WiFi connection

以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。

The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.

無線設定 Wireless Setup

方法一：簡易無線連接 (透過手機)

Method 1: Easy Wireless Connect (via mobile device)

1. 確保在開始無線連接設定之前，印表機已開啟。

如果電源開啟，電源指示燈閃爍，然後持續亮起。

Make sure printer is turned on before starting wireless connection setup.

If the power is on, the ON lamp flashes and then remains lit.



2. 請按住 (無線連接) 約三秒鐘，直至 (Wi-Fi) 指示燈閃爍後鬆開。



Press and hold (Wireless connect) for about three seconds, and then release it when the (Wi-Fi) lamp flashes.



3. 根據手機作業系統按以下連結使用 Canon Print 設定無線

Referring to the mobile operation system and click the link below and setup wireless with Canon Print

Android:

https://www2.canon.com.hk/services/faq/210070_WiFi_Setup_Easy_Wireless_Connect_Android.pdf

iOS:

https://www2.canon.com.hk/services/faq/210071_WiFi_Setup_Easy_Wireless_Connect_iOS.pdf

方法二: WPS(按鈕) 連接

Method 2: WPS (Button) Connection

4. 確保可以按無線路由器上的 WPS 按鈕。

Make sure the WPS button on the wireless router is ready to be pressed.



5. 按住印表機上的 (Wi-Fi)，然後在 (Wi-Fi) 指示燈閃爍時鬆開。



Press and hold (Wi-Fi) on the printer, and then release it when the (Wi-Fi) lamp flashes.



6. 在 2 分鐘內按住無線路由器上的 WPS 按鈕。

Press and hold the WPS button on the wireless router within 2 minutes.

網路連接設定完成。

The network connection setup is now complete.



與無線路由器的連接完成後， (Wi-Fi) 指示燈將停止閃爍並保持點亮。



Once connection to the wireless router is complete, the (Wi-Fi) lamp stops flashing and stays lit.

下載及安裝步驟

Driver download and Installation procedure

7. 到以下佳能網站並下載印表機的驅動程式

Go to below Canon webpage and download the printer driver

<https://hk.canon/en/support/pixma%20g3730/model>

8. 選擇並下載以下檔案

Choose and download below file



Master Setup (Windows)

<https://hk.canon/en/support/0101116303>


9. 按網頁內的〔Download〕，下載完成後開啟該檔案安裝

Click [Download] in the webpage, and then execute the file after download was completed




10. 選擇語言，然後按〔OK〕

Choose the language, then click [OK]

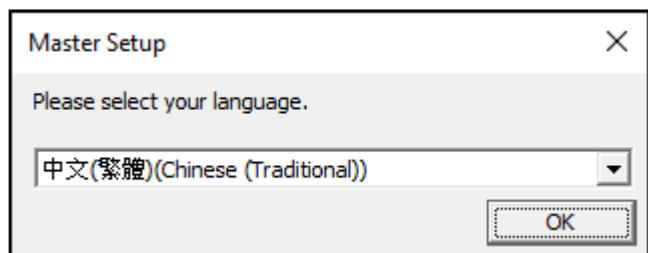

11. 選擇亞洲，然後按〔確定〕

Choose Asia, then click [OK]

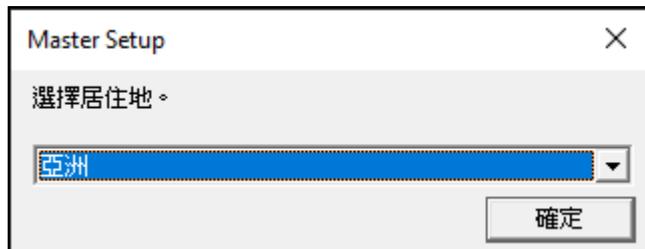

12. 按〔開始設定〕

Click [Start Setup]



13. 請等候

Please wait



14. 按〔是〕

Click [Yes]



15. 閱後按〔同意〕或〔不同意〕

Click [Agree] or [Do not agree] after reading



16. 請等候

Please wait



17. 確認印表機電源已開啟，再按〔下一步〕
Confirm power on the printer, then click [Next]



18. 請等候
Please wait




19. 選擇印表機，再按〔下一步〕，如未能偵測印表機，請檢查網路連線

Choose the printer, then click [Next], if printer cannot be found, please check the network connection



20. 成功偵查印表機後請等候安裝

Please wait for install after detect the printer

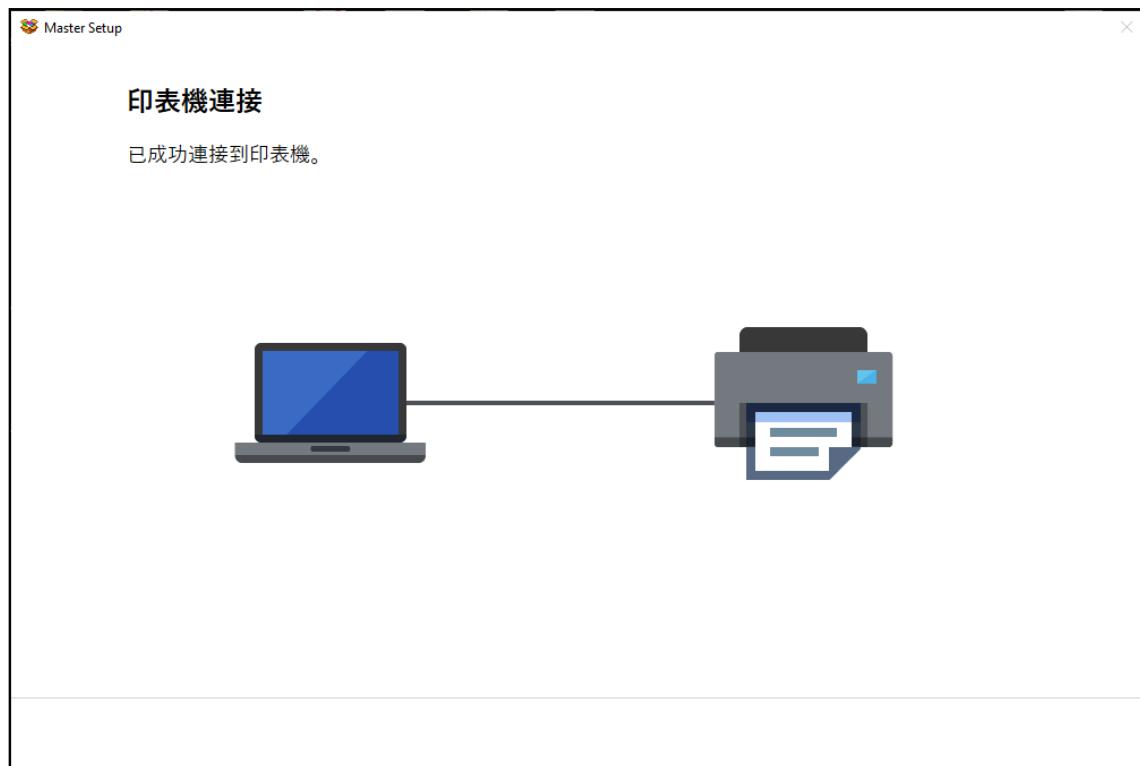


21. 按〔下一步〕

Click [Next]




22. 請等候安裝

Please wait for install

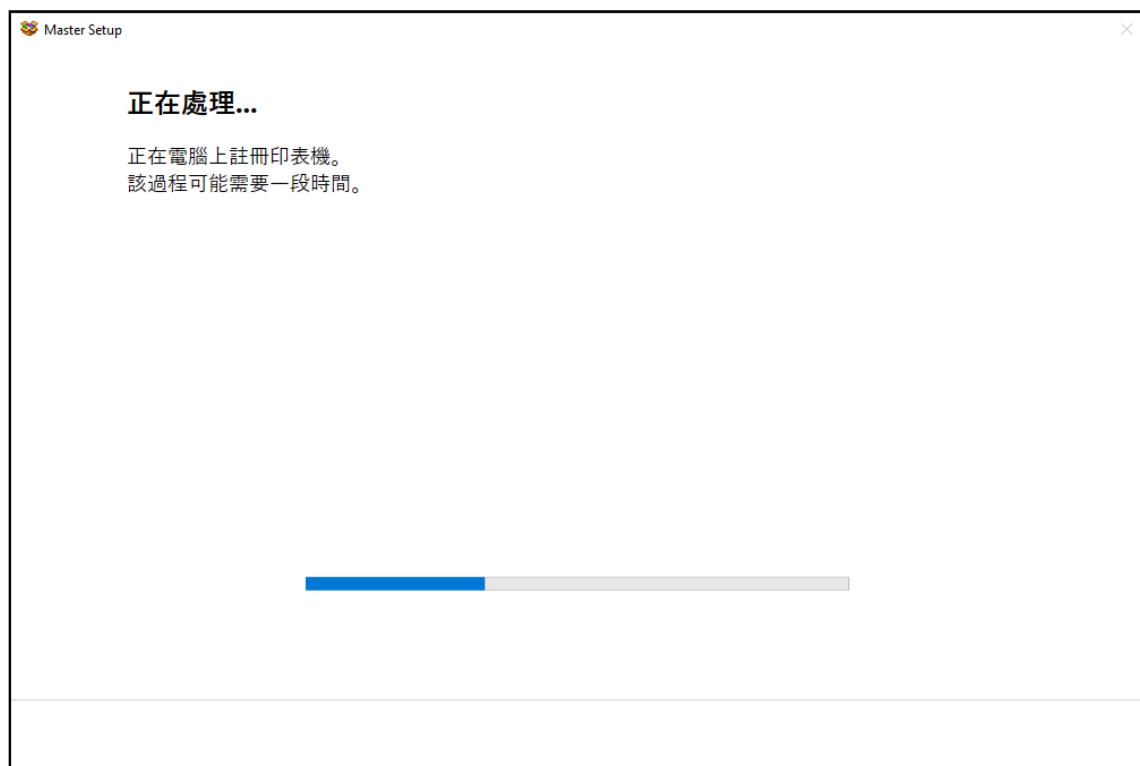

23. 按〔下一步〕

Click [Next]

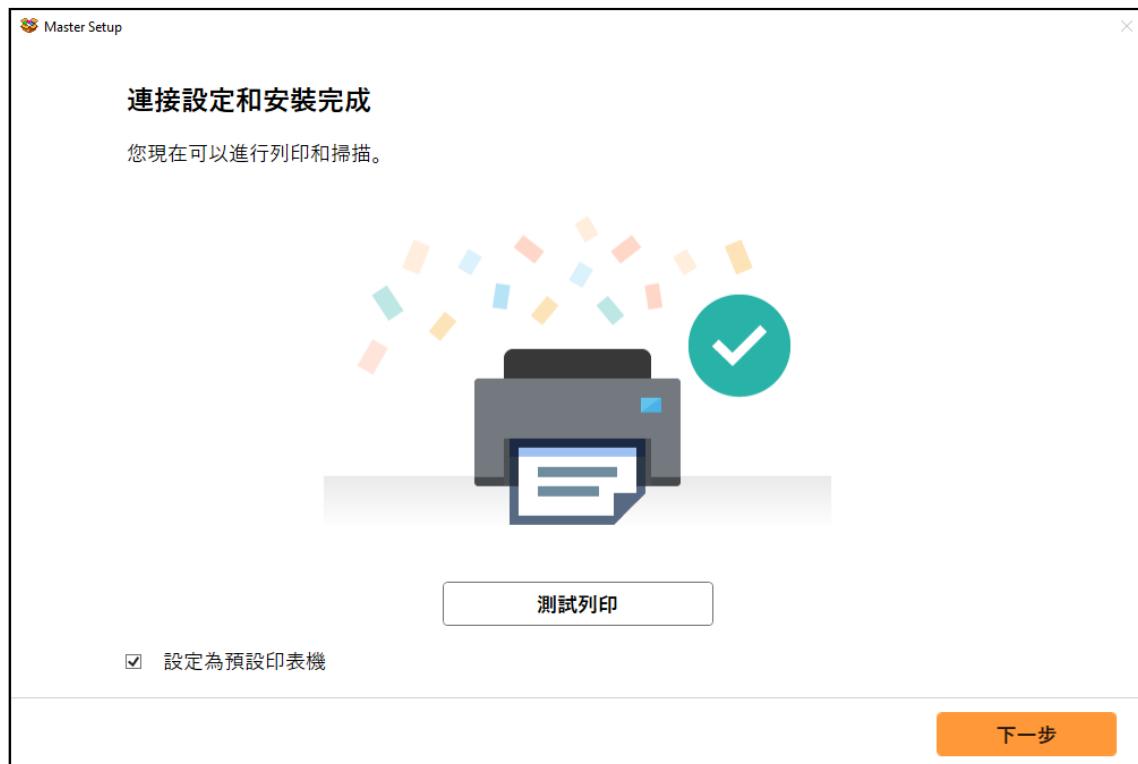

24. 安裝完成

Driver installation was completed



-完-

-End-