

**MF465dw 在 Windows 透過 Wi-Fi 連接印表機之驅動程式步驟**  
**Driver installation procedure for MF465dw in Windows (Via Wi-Fi)**

先將打印機連接到網路，詳細可參考以下步驟


Connect printer to network first, please refer to following procedure

1. 開啟印表機

Turn on the printer

2. 在主畫面中點選 [  ] (無線區域網路設定)


- 若顯示登入畫面，請輸入正確的系統管理員識別碼和 PIN，然後按 [ 登入 ]
- 若顯示 [ 是否啟用無線區域網路? ] 訊息，請選擇 [ 是 ]

On the operation panel, press [  ] (Wireless LAN Settings) in the [Home] screen

- If the login screen appears, enter the System Manager ID and PIN, and then press [Log In].
- If the message [Do you want to enable the wireless LAN?] appears, press [Yes].

3. 選擇要連接的無線區域網路路由器名稱(SSID)

Select the SSID of the wireless LAN to which you want to connect

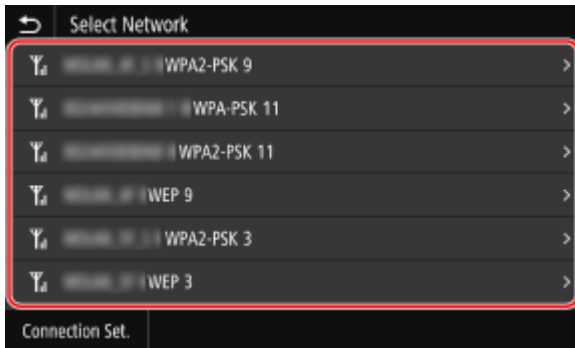

4. 輸入網路密碼，然後按 [ 套用 ]

Enter the network key, and press [Apply]

5. 等待主畫面顯示 [ 已連線。 ]，然後按 [ 關閉 ]

When [Connected.] is displayed on the operation panel, press [Close]

等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until IP address settings of the machine complete

## 下載及安裝步驟

### Driver download and Installation procedure

6. 到以下網站下載印表機的驅動程式及掃描軟件  
Go to below URL then download the printer driver and scanner software  
<https://hk.canon/en/support/imageclass%20mf465dw/model>


7. 選擇並下載以下檔案  
Choose and download below files:

- 打印機驅動程式 / Printer Driver



[Windows x32bit] MF469x/ MF465dw/ MF461dw MFDivers (Generic Plus UFR II / Generic Plus PCL6 / Generic Plus PS3 / Generic FAX / ScanGear)

- 掃描軟件 / Scanning Software

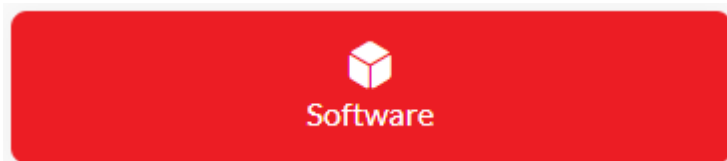


[Windows 32bit & 64bit] MF Scan Utility Ver.\*.\*

8. 執行檔案 [MF460SeriesMFDriverVxxxxxx.exe] 按「下一步」  
Run File [MF460SeriesMFDriverVxxxxxx.exe], click "Next"




9. 按「是」  
Click "Yes"

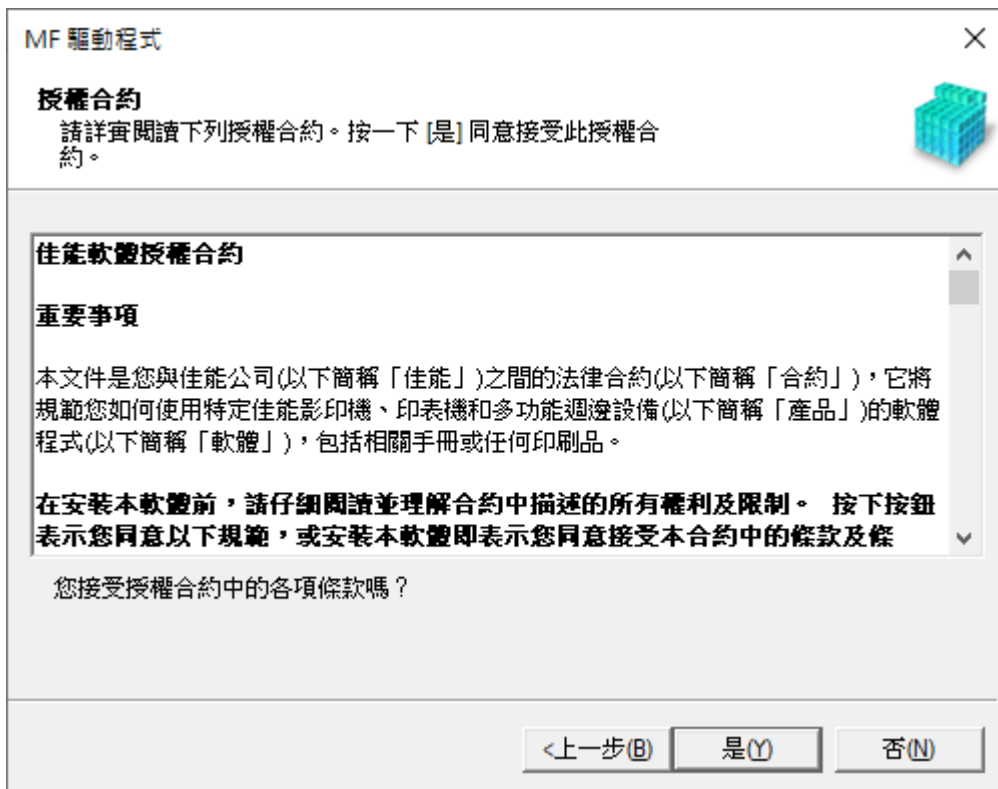

10. 選擇「網路連線(適用於網路型號)」，按「下一步」  
Choose “Network connection (for Network Models)”, click “Next”



11. 程式會自動偵測網絡上的印表機，選擇後按「下一步」  
Program will automatic detect the network printer, choose printer and click “Next”

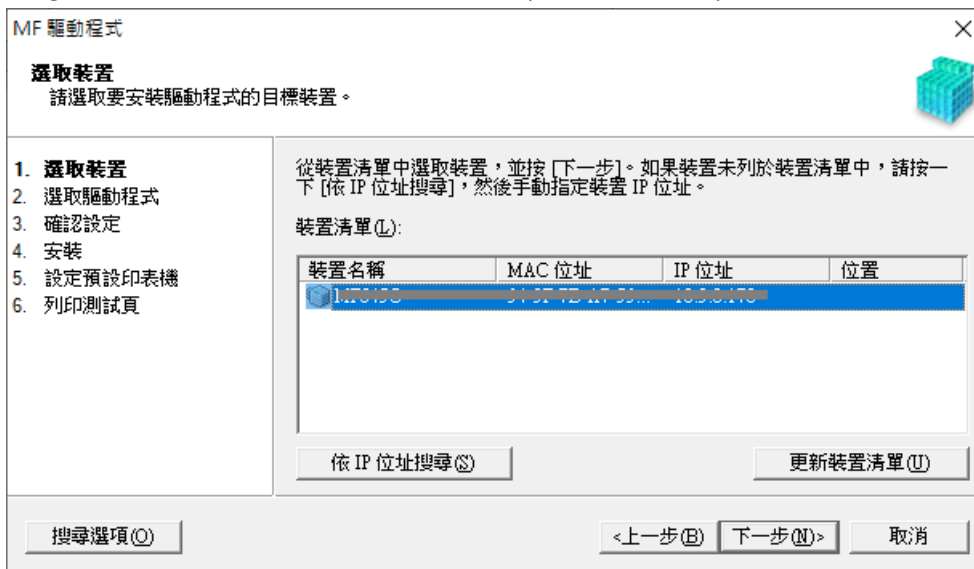

12. 按「下一步」

Click "Next"

MF 驅動程式

選取驅動程式  
請選取所要安裝的驅動程式。

1. 選取裝置  
2. **選取驅動程式**  
3. 確認設定  
4. 安裝  
5. 設定預設印表機  
6. 列印測試頁

目標裝置  
[REDACTED]

要安裝的驅動程式:

印表機 (P)  
 傳真 (適用於受支援的型號) (F)  
 掃描器 (S)  
 Canon Driver Information Assist Service (C)

安裝此服務並使用共用或本機印表機時，可讓您取得裝置資訊的功能將會新增到您的電腦。

< 上一步 (B)   下一步 (N) >   取消

13. 按「下一步」

Click "Next"

MF 驅動程式

選取驅動程式  
請選取所要安裝的驅動程式。

1. 選取裝置  
2. **選取驅動程式**  
3. 確認設定  
4. 安裝  
5. 設定預設印表機  
6. 列印測試頁

目標裝置  
[REDACTED]


要安裝的印表機驅動程式:

Generic Plus UFR II 印表機驅動程式 (U)  
 Generic Plus PCL6 印表機驅動程式 (P)  
 Generic Plus PS3 印表機驅動程式 (S)

< 上一步 (B)   下一步 (N) >   取消

14. 按「下一步」

Click "Next"

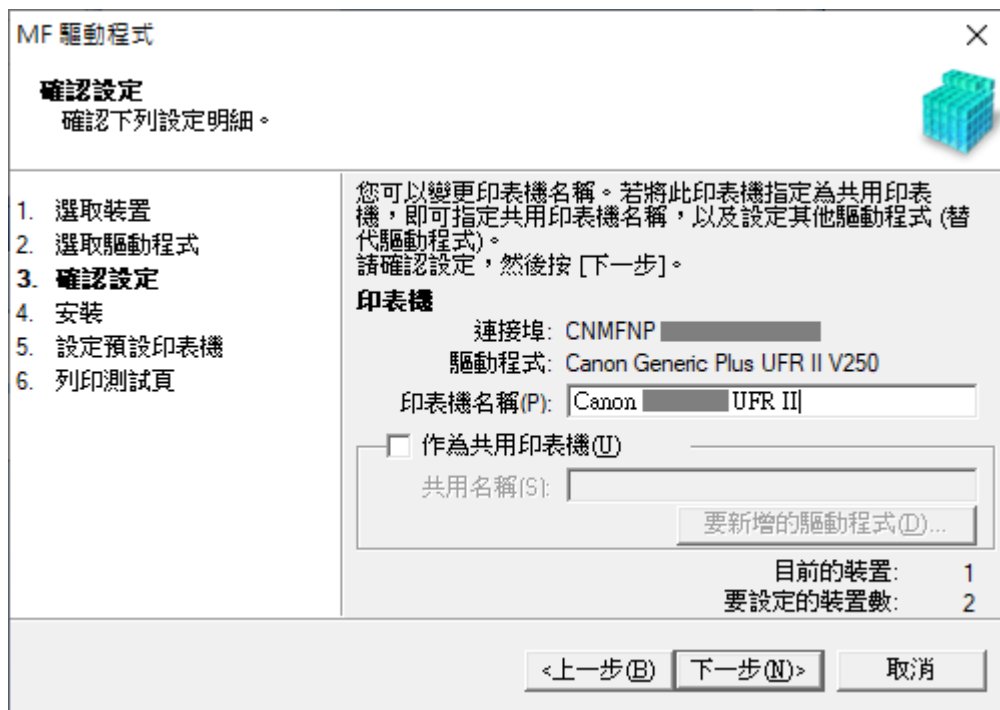

**MF 驅動程式**

**確認設定**  
確認下列設定明細。

1. 選取裝置  
2. 選取驅動程式  
3. **確認設定**  
4. 安裝  
5. 設定預設印表機  
6. 列印測試頁

您可以變更印表機名稱。若將此印表機指定為共用印表機，即可指定共用印表機名稱，以及設定其他驅動程式 (替代驅動程式)。  
請確認設定，然後按 [下一步]。

**印表機**

連接埠: CNMFNP  
驅動程式: Canon Generic Plus UFR II V250  
印表機名稱(P): Canon UFR II


作為共用印表機(U)  
共用名稱(S):  
要新增的驅動程式(D)...

目前的裝置: 1  
要設定的裝置數: 2

<上一步(B) 下一步(N)> 取消

15. 按「下一步」

Click "Next"



**MF 驅動程式**

**確認設定**  
確認下列設定明細。

1. 選取裝置  
2. 選取驅動程式  
3. **確認設定**  
4. 安裝  
5. 設定預設印表機  
6. 列印測試頁

您可以變更傳真機名稱。若將此傳真機指定為共用傳真機，即可指定共用傳真機名稱，以及設定其他驅動程式 (替代驅動程式)。  
請確認設定，然後按 [下一步]。

**傳真機**


連接埠: CNMFNP  
驅動程式: Canon Generic FAX Driver (FAX)  
傳真機名稱(F): Canon Fax

作為共用傳真機(U)  
共用名稱(S):  
要新增的驅動程式(D)...


目前的裝置: 2  
要設定的裝置數: 2

<上一步(B) 下一步(N)> 取消


16. 按「啟動」  
Click "Start"

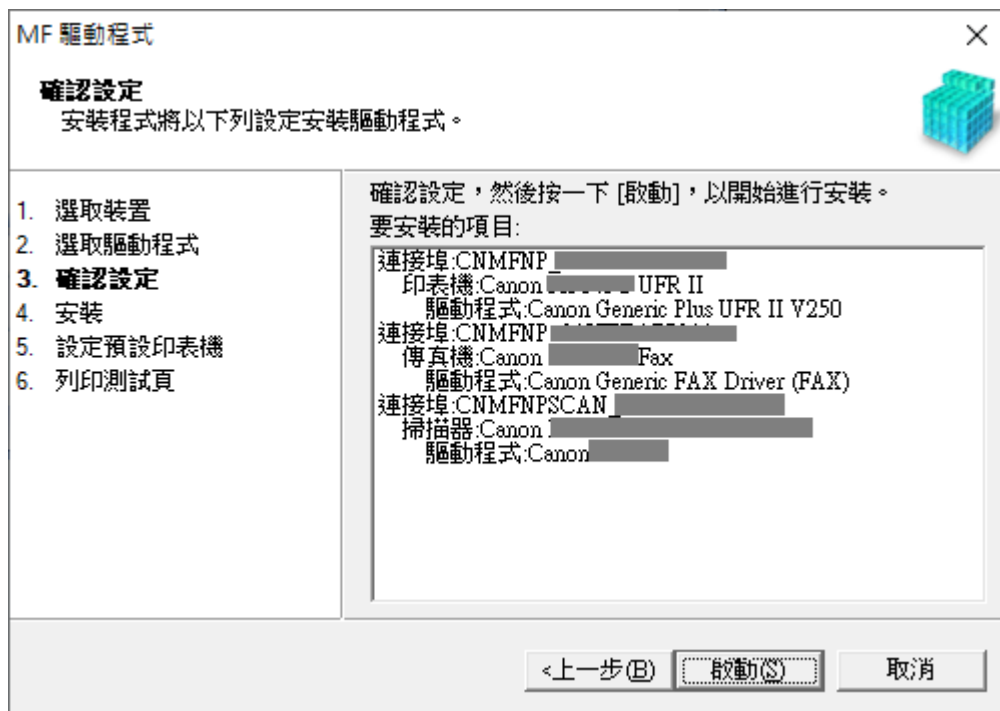


17. 等待安裝程序完成  
Waiting for the installation progress

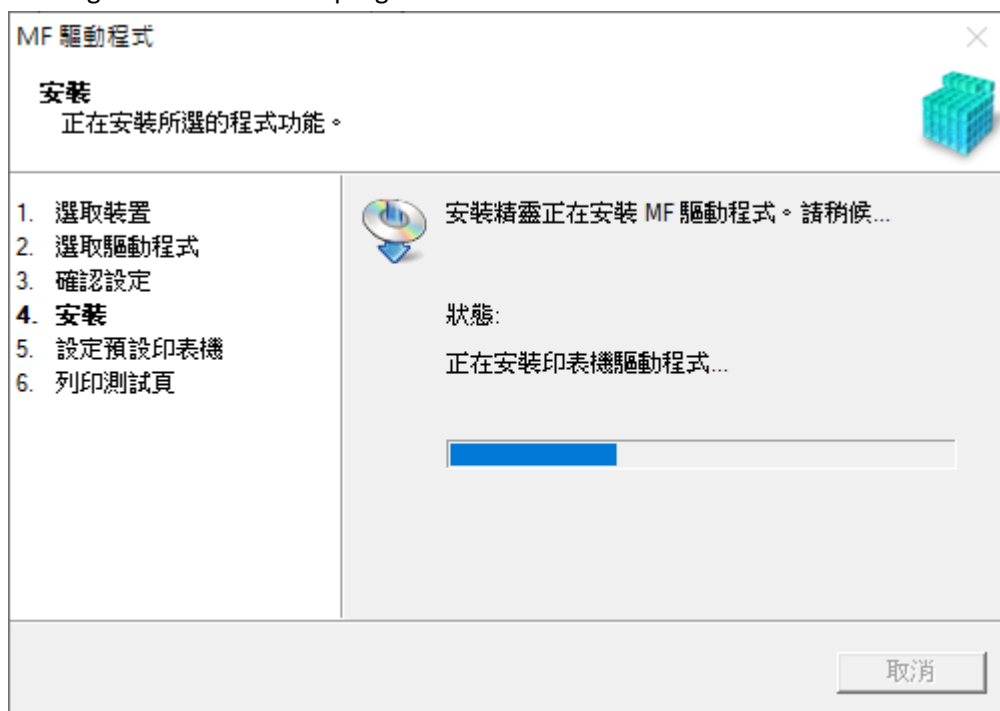

18. 選擇打印機，然後按「下一步」  
Choose printer, then click “Next”

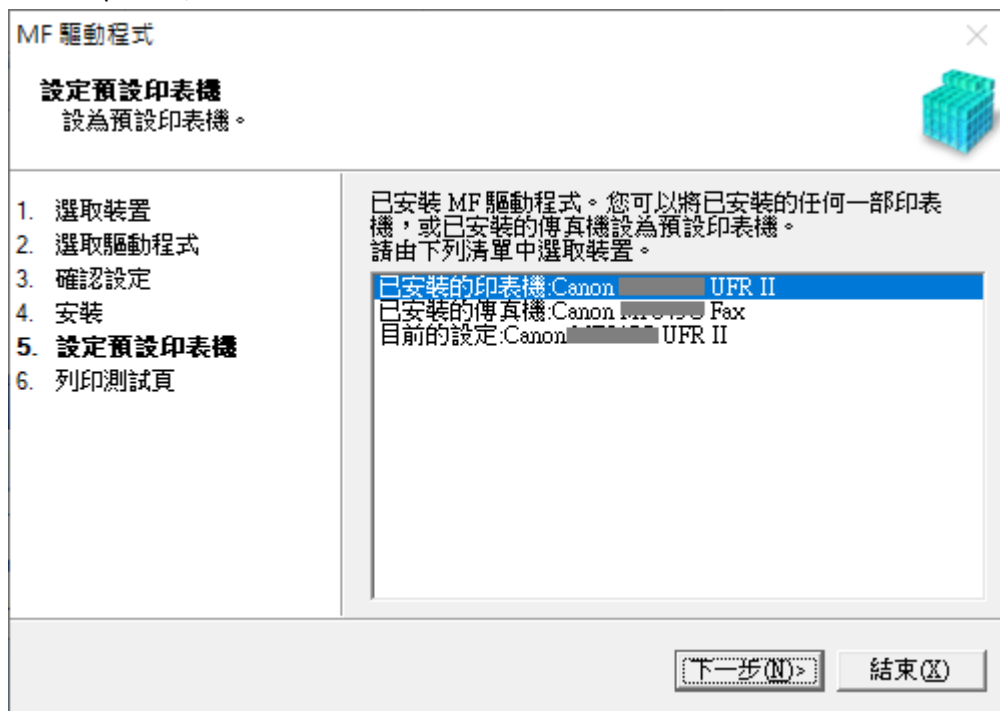


19. 按「結束」  
Click “Exit”

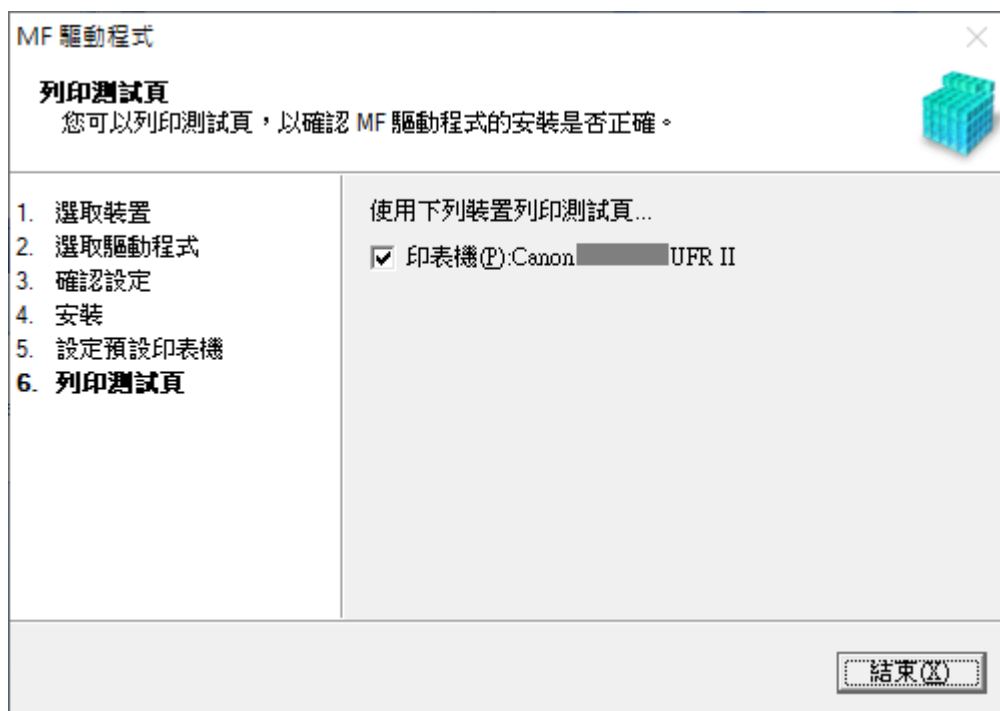




安裝掃描軟件MF Scan Utility  
MF Scan Utility installation procedure

20. 執行檔案〔winmfscanutilityvxxxx.exe〕按「Next」  
Run the file [winmfscanutilityvxxxx.exe], click “Next”

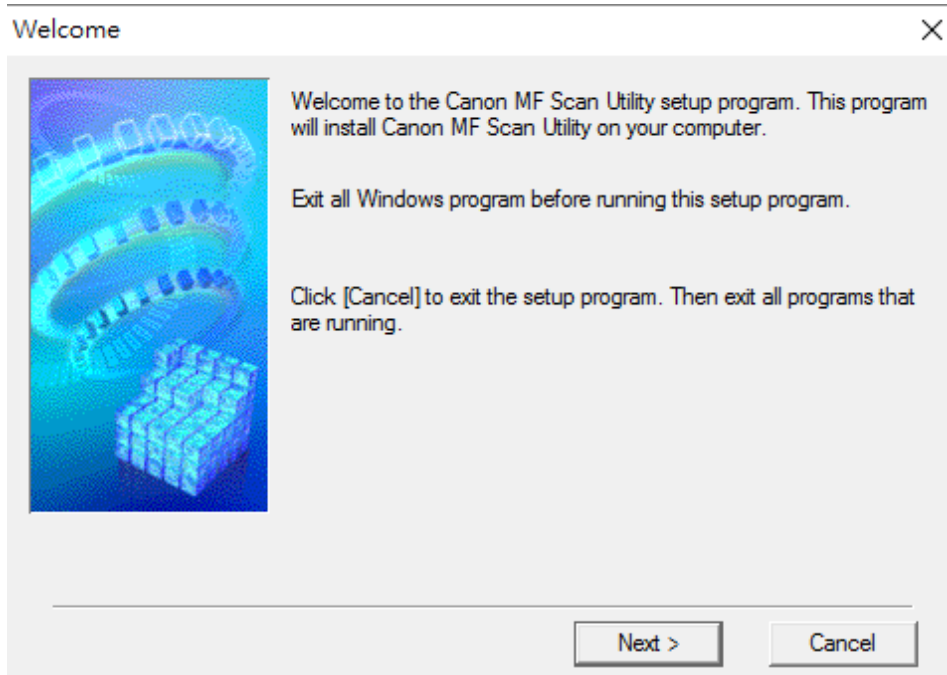


21. 按「Yes」  
Click “Yes”

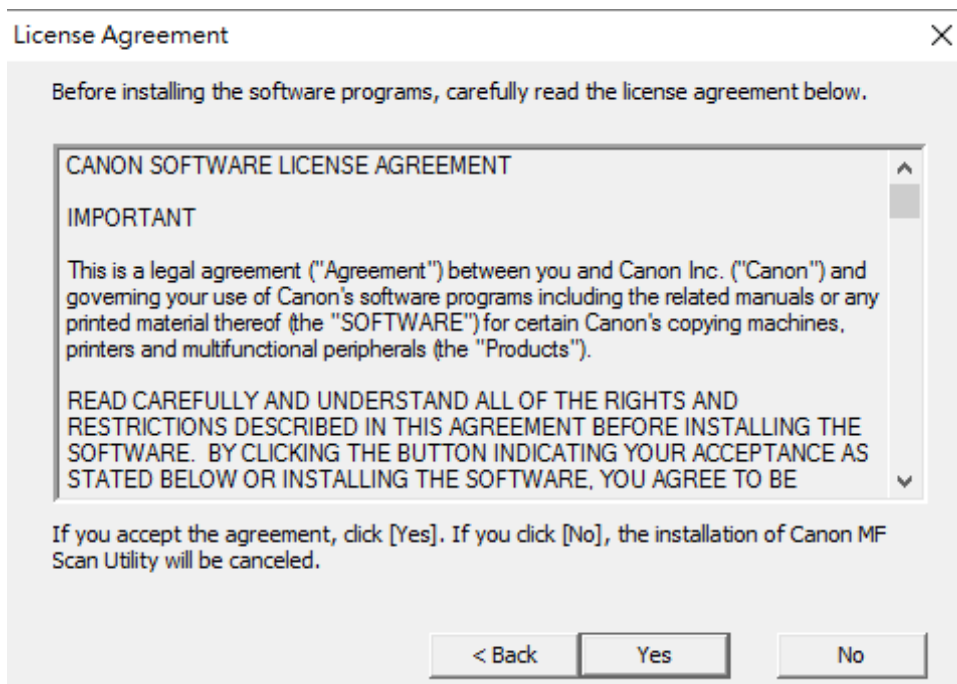


22. 等待安裝程序完成  
Waiting for the installation progress

Install

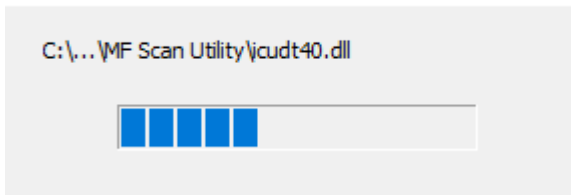

23. 按「Complete」完成安裝  
Click "Complete" to finish installation

Installation Complete

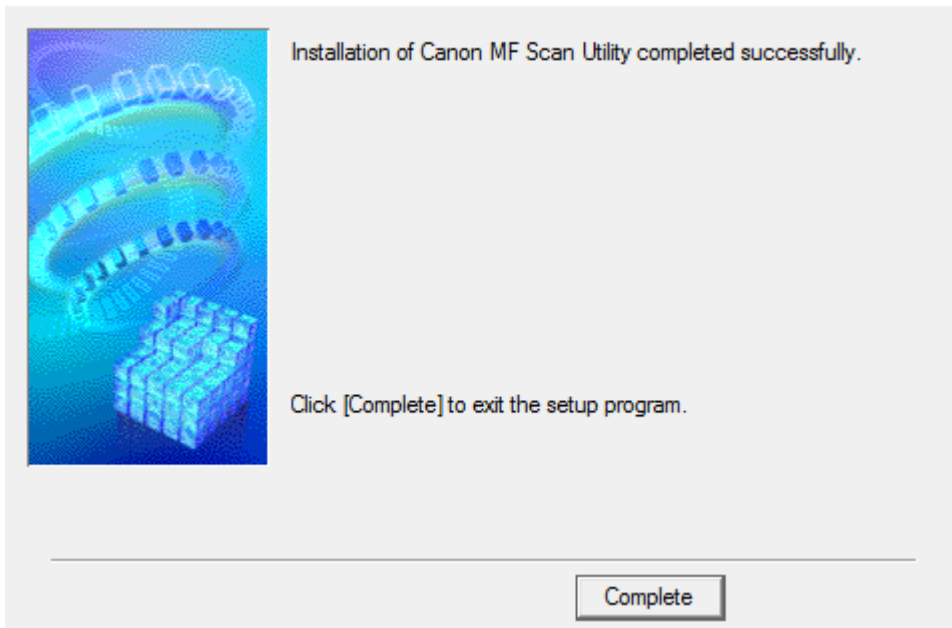

-完-  
-End-