

MF289dw 在 macOS 透過有線 LAN 連線連接印表機之驅動程式步驟

Driver installation procedure for MF289dw in macOS via LAN

以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。

The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.

先將打印機連接到網路，詳細可參考以下步驟


Connect printer to network first, please refer to following procedure

1. 開啟印表機

Turn on the printer

2. 在控制面板上，按下 [首頁] 畫面中的 [功能表]

On the control panel, press [Menu] in the [Home] screen

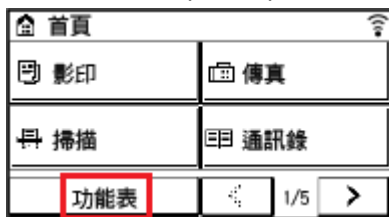

3. 按下 [參數選擇] ► [網路] ► [選擇有線/無線區域網路]


Press [Preferences] ► [Network] ► [Select Wired/Wireless LAN]

4. 選擇 [有線區域網路]

Select [Wired LAN]

5. 使用區域網路纜線將本機連接到路由器，推入接頭，直至聽到喀嗒聲

Connect the machine to router by using a LAN cable, push the connector in until it clicks into place

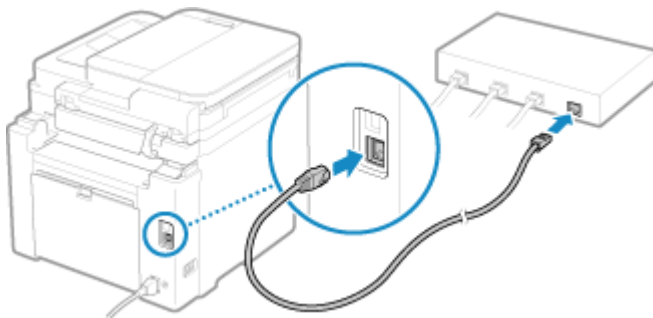

等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until IP address settings of the machine complete

下載及安裝步驟

Driver download and installation procedure

6. 到以下網站下載印表機的驅動程式及掃描軟件

Go to below URL then download the printer driver and scanner software

<https://hk.canon/en/support/imageCLASS%20MF289dw/model>

7. 選擇並下載以下檔案

Choose and download the files below

- 打印機驅動程式 / Printer Driver

UFR II/UFR II LT Printer Driver & Utilities for Mac Vxx.xx.xx [macOS xxxx - macOS xxxx]


- 傳真驅動程式 / FAX Driver

Fax Driver & Utilities for Macintosh VXXXXXX

- 掃描器驅動程式 / Scanner Driver

Scanner Driver & Utilities for Mac Vx.xx.xx [macOS xxxx - macOS xxxx]


8. 下載完成後開啟檔案〔 mac-UFR II-LIPSLX-XXXXXX.dmg 〕，按「 UFR II_LT_LIPS_LX_Installer.pkg 」
Open the downloaded file〔 mac-UFR II- LIPSLX-XXXXXX.dmg 〕, click “UFR II_LT_LIPS_LX_Installer.pkg”

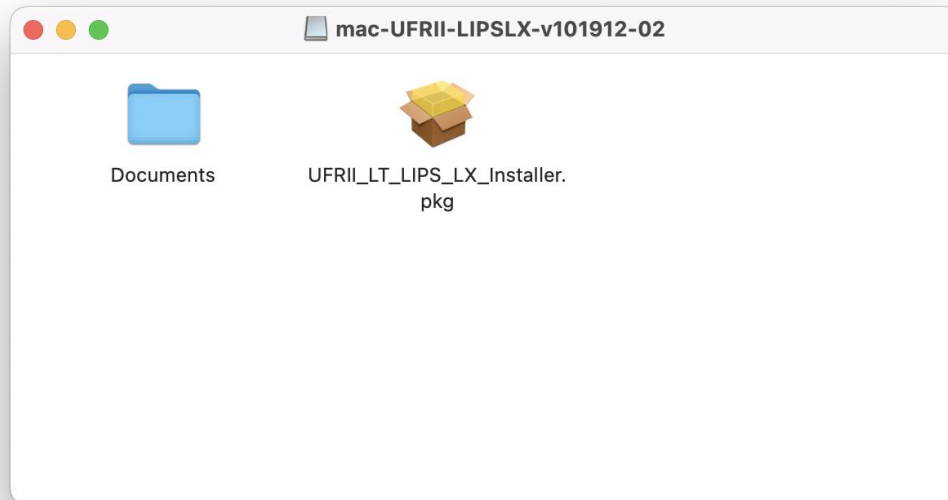


9. 按「繼續」
Click “Continue”



10. 按「繼續」然後按「同意」
Click “Continue” and then click “Agree”

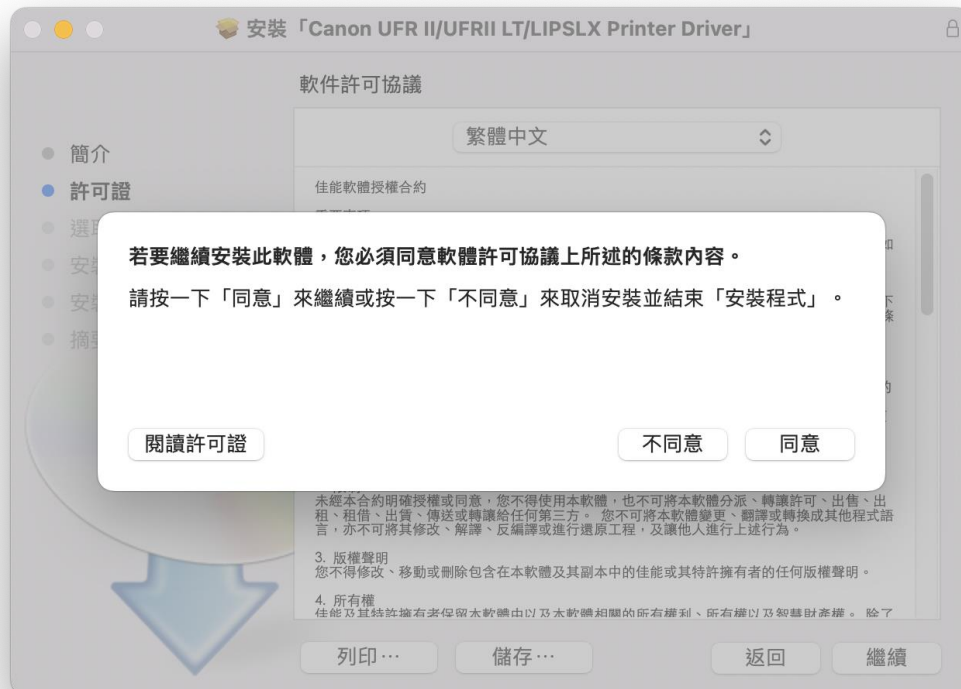

11. 按「安裝」
Click "Install"

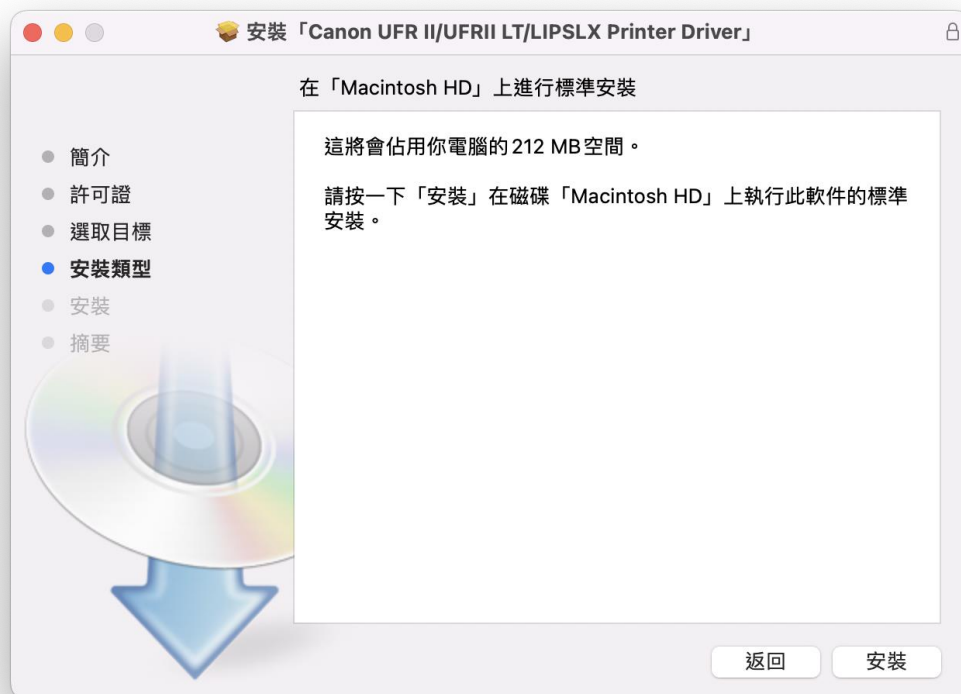


12. 輸入電腦帳戶密碼然後按「安裝軟體」
Input computer account password, then click "Install Software"




13. 等待安裝程序完成
Waiting for the installation progress



14. 按「關閉」
Click "Close"

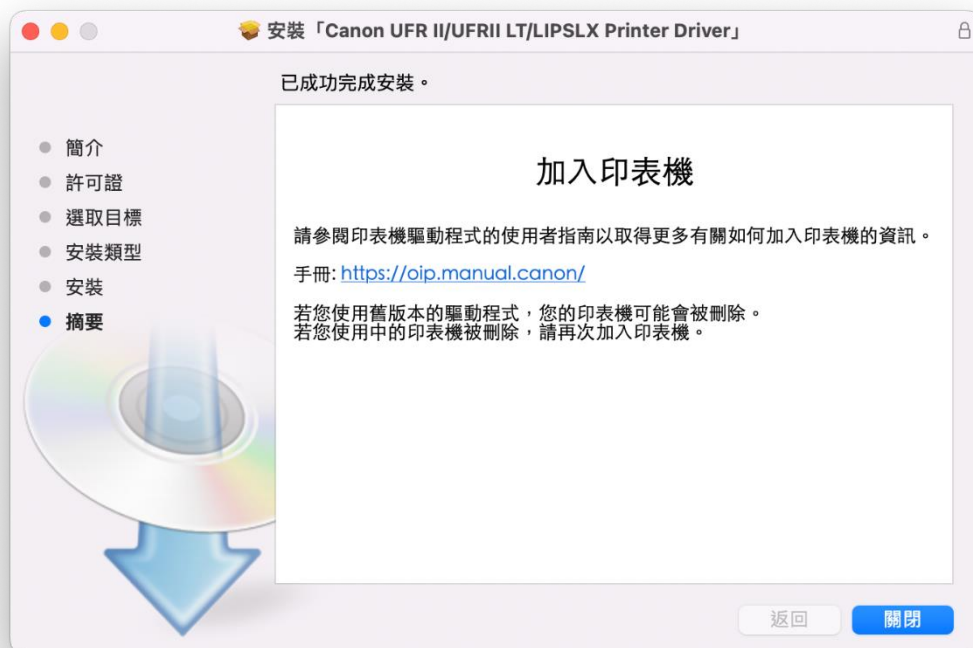

15. 開啟檔案〔 mac-fax-vXXXXXX.dmg 〕，按「Canon_FAX_Installer.pkg」
Open the file〔 mac-fax-vXXXXXX.dmg 〕，click “Canon_FAX_Installer.pkg”)

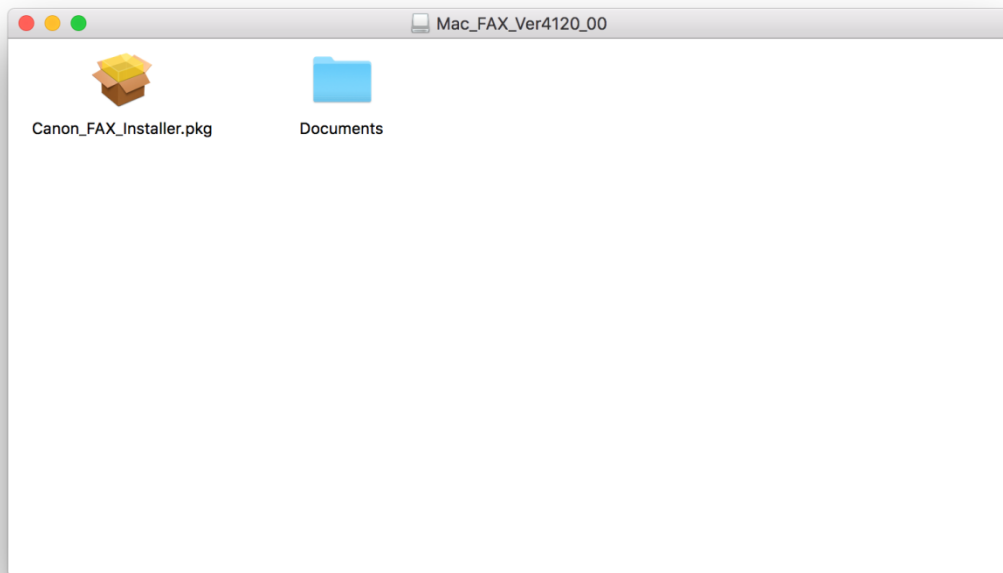

16. 按「繼續」
Click “Continue”




17. 按「繼續」然後按「同意」
Click “Continue” and then click “Agree”




18. 按「繼續」
Click “Continue”



19. 輸入電腦帳戶密碼然後按「安裝軟件」
Input computer account password, then click "Install Software"

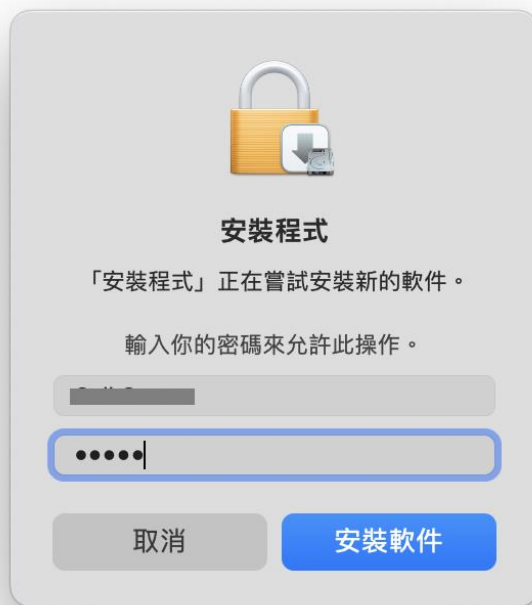


20. 等待安裝程序完成
Waiting for the installation progress

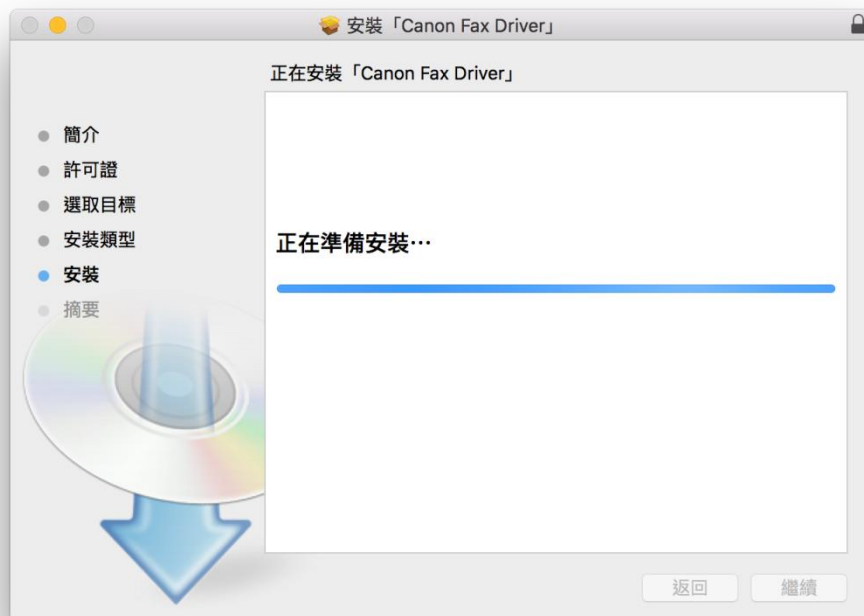

21. 按「關閉」
Click “Close”



22. 開啟檔案〔 mac-scan-vXXXXXX.dmg 〕, 按「Canon_ScanGear_MF.pkg」
Open file〔 mac-scan-vXXXXXX.dmg 〕, click “Canon_ScanGear_MF.pkg”

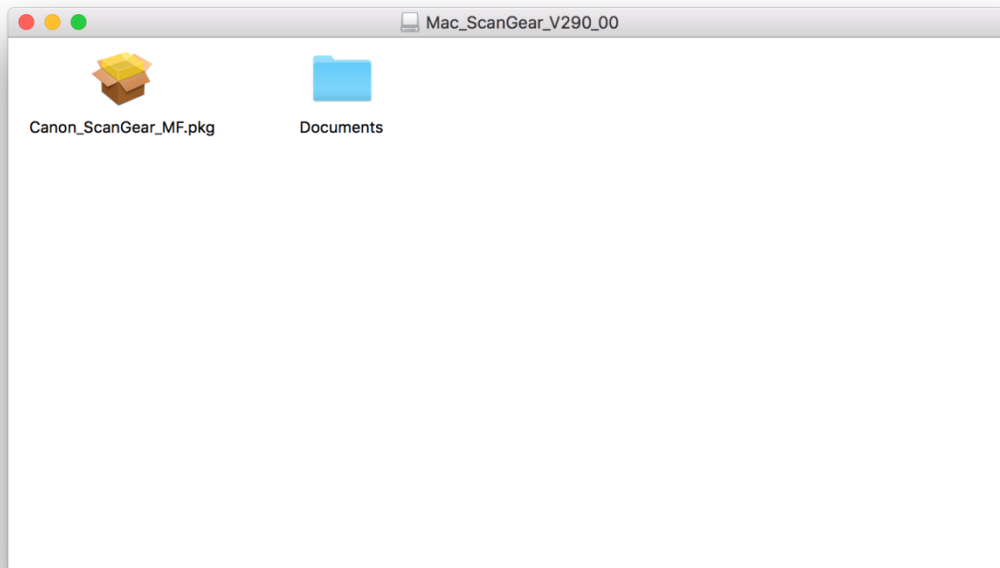

23. 按「繼續」
Click “Continue”




24. 按「繼續」然後按「同意」
Click “Continue” and then click “Agree”




25. 按「安裝」
Click "Install"




26. 輸入電腦帳戶密碼然後按「安裝軟件」
Input computer account password, then click "Install Software"

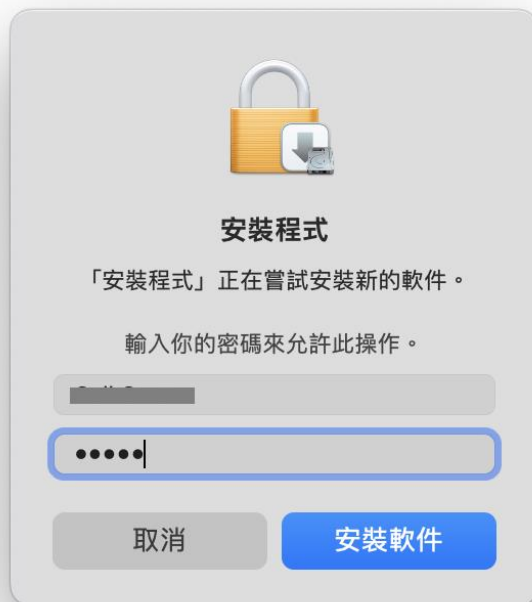

27. 等待完成安裝程序
Waiting for the installation progress

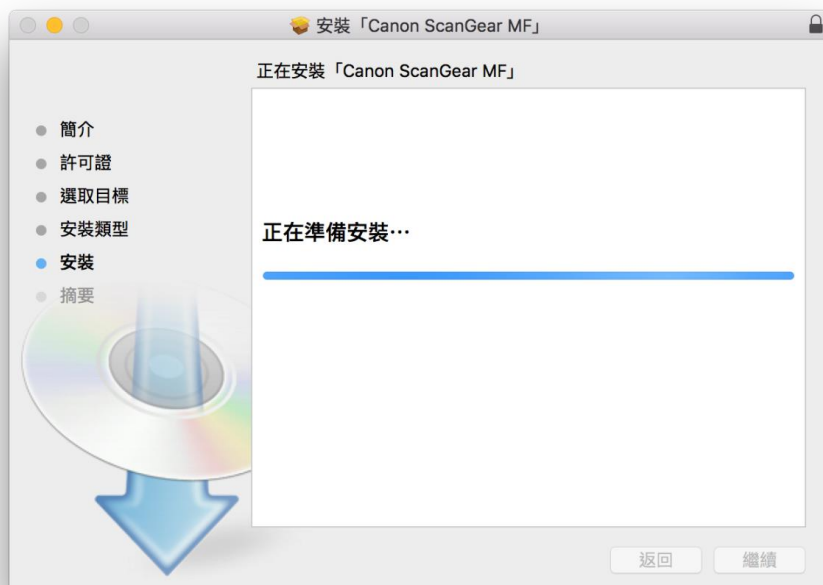

28. 按「關閉」
Click "Close"

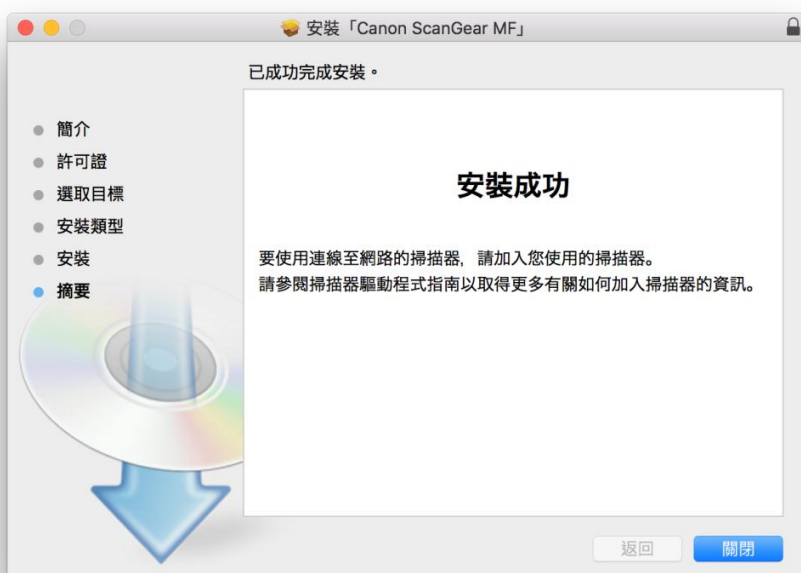


29. 完成安裝驅動程式後需新增印表機，到「系統偏好設定」，選「印表機與掃描器」
Go to “System Preferences” and open “Printer and Scanner”



30. 選取左下角「+」按鈕，選「加入印表機或掃描器」
Click the “+” button and select “Add printer or Scanner”




31. 選擇印表機，然後按「加入」
Choose the printer, then click “Add”

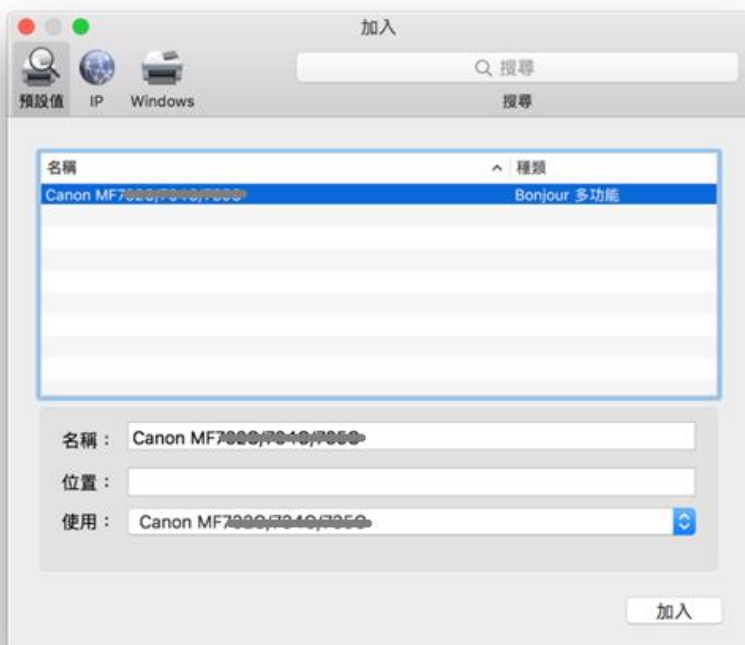

32. 如要加入傳真功能，請再一次按左下角「+」按鈕，選「加入印表機或掃描器」，使用選擇「Canon MF280 Series FAX」按「加入」
If need to add FAX function, please click the “+” button and select “add printer or scanner”, select “Canon MF280 Series FAX” in “Use”, then click “Add”



33. 網絡掃描需新增掃描器到 MF Scan Utility，到應用程式 > Canon MF Utilities 開啟 MF Scan Utility，第一次開啟時會出現下圖錯誤字句，網路掃描器視窗會自動開啟，按左下角「+」號新增掃描器
A network scanner need to add into MF Scan Utility, go to “Application” -> “Canon MF Utilities” and run the MF Scan Utility, below error message will show when first time launch, network Scanner Setting windows open automatic, click the “+” button add scanner

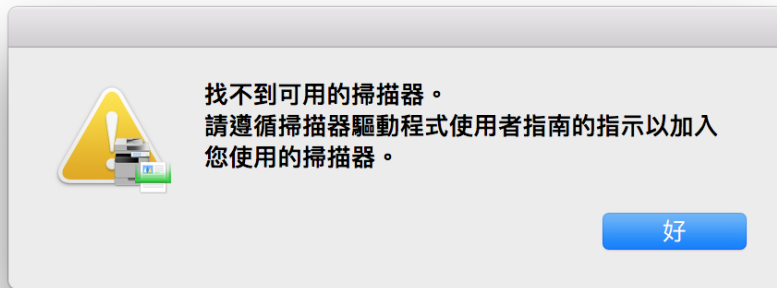

34. 選擇打印機，然後按「新增」
Choose the printer and then click “Add”



35. 完成以上設定後已可使用印表機作打印及掃描功能
Setup completed. Print and scan functions are ready to use

-完-
-End-