

MF756Cx II 在 macOS 透過有線 LAN 連線連接印表機之驅動程式步驟 **Driver installation procedure for MF756Cx II in macOS (Via Wired LAN)**


以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。
The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.

先將打印機連接到網路，詳細可參考以下步驟

Connect printer to network router first, please refer to following procedure

1. 開啟印表機
Turn on the printer
2. 在主畫面中點選「有線 / 無線」[] / []
Tap "Wired / Wi-Fi" icon in the Home Screen [] / []
3. 點選 <有線區域網路>
Tap "Wired LAN"

4. 使用區域網路纜線將本機連接到路由器
推入接頭，直至聽到喀嗒聲
Connect the machine to router by using a LAN cable, push the connector in until it clicks into place

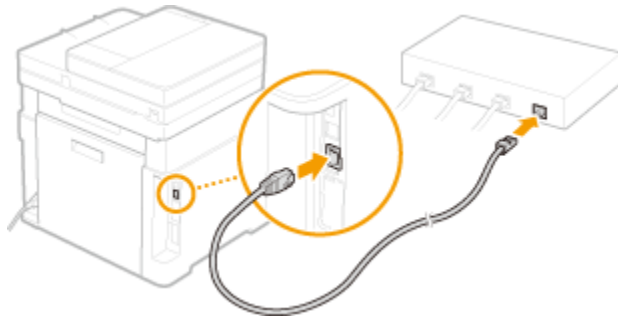

等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until the IP address settings of the machine are completed

下載及安裝步驟


Driver download and installation procedure

5. 到佳能香港網站下載印表機的驅動程式及掃描軟件
Go to Canon Hong Kong URL below download the printer driver and scanner software
<https://hk.canon/en/support/imageCLASS%20MF756Cx%20II/model>

Drivers

6. 選擇並下載以下檔案
Choose and download below files:
 - 打印機驅動程式 / Printer Driver
〔 [UFR II/UFR II LT Printer Driver & Utilities for Macintosh VXXXXXX](#) 〕
 - 掃描器驅動程式 / Scanner Driver
〔 [Scanner Driver & Utilities for Macintosh VXXXXXX](#) 〕

7. 下載完成後開啟檔案〔 mac-UFR11-vXXXXXX 〕，按「 MF_Printer_Installer.pkg 」
Open the downloaded file〔 mac-UFR11-vXXXXXX 〕, press “MF_Printer_Installer.pkg”

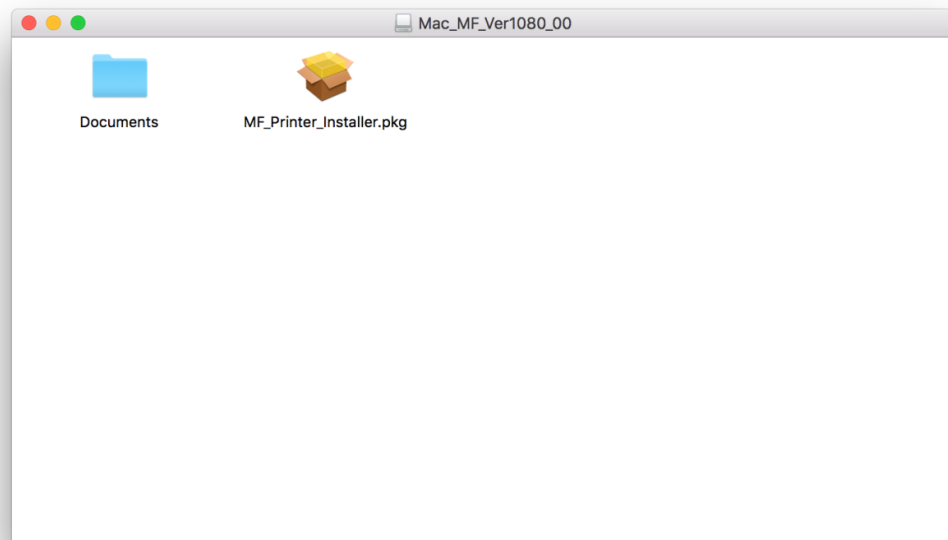


8. 按「繼續」
Choose “Next”



9. 按「繼續」然後按「同意」
Choose “Next” and then choose “Agree”



10. 按「安裝」
Choose “Install”

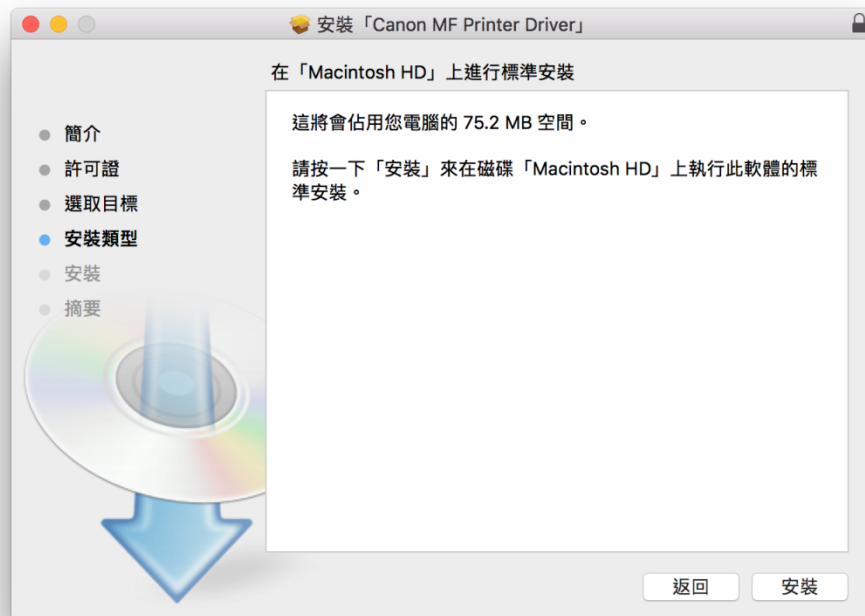


11. 等待安裝程序完成

Waiting for the installation progress




12. 按「關閉」

Choose "Close"

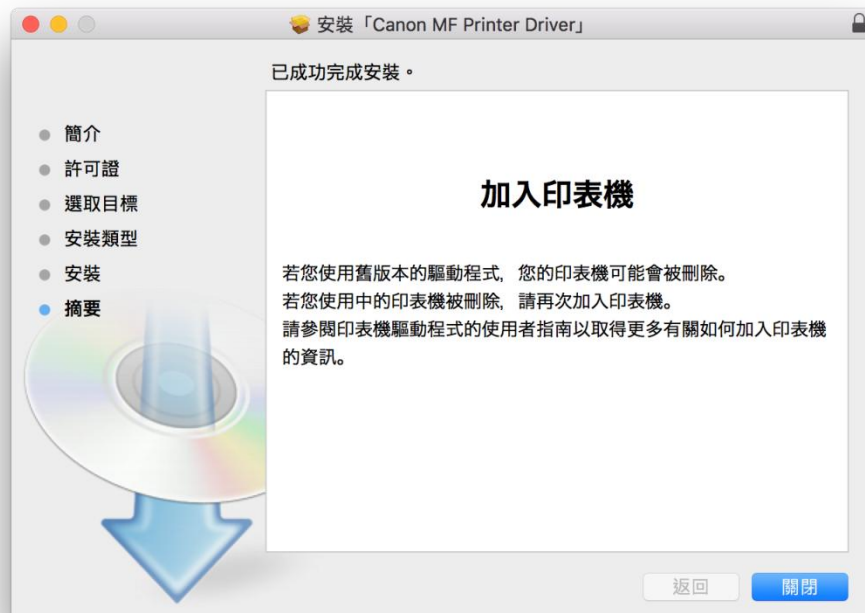

13. 開啟檔案〔 mac-scan-vXXXXXX 〕，按「 Canon_ScanGear_MF.pkg 」
Open file〔 mac-scan-vXXXXXX 〕, press “Canon_ScanGear_MF.pkg”

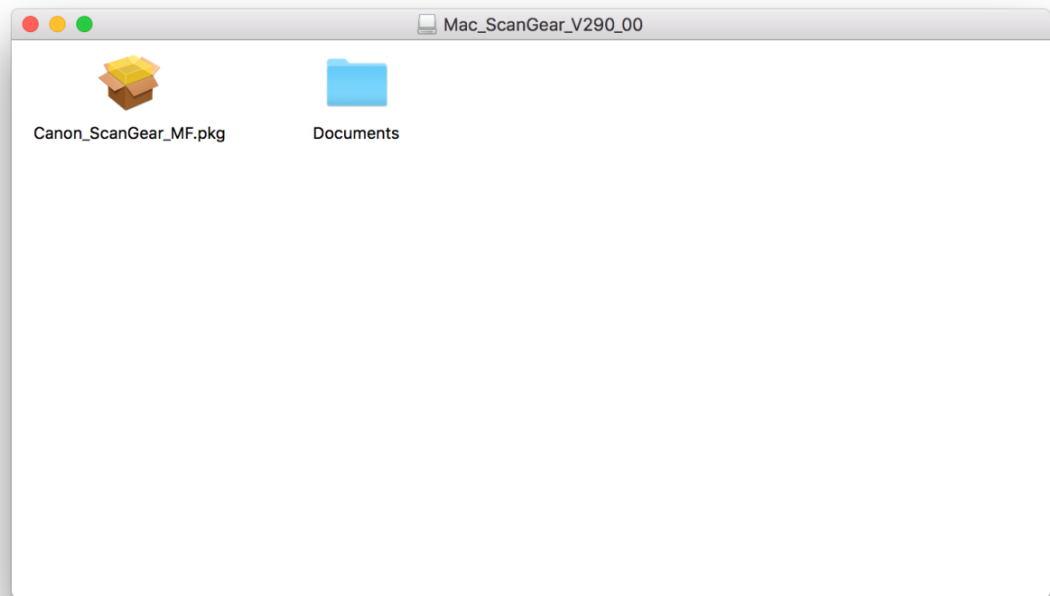


14. 按「繼續」
Choose “Continue”



15. 按「繼續」然後按「同意」
Choose “Continue” and then choose “Agree”



16. 按「安裝」
Choose “Install”

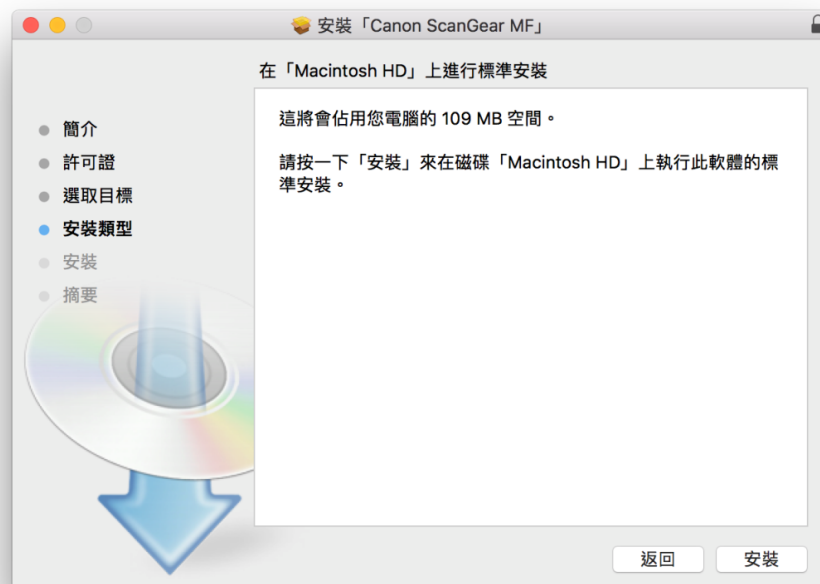


17. 等待完成安裝 程序

Waiting for the installation progress



18. 按「關閉」

Choose "Close"

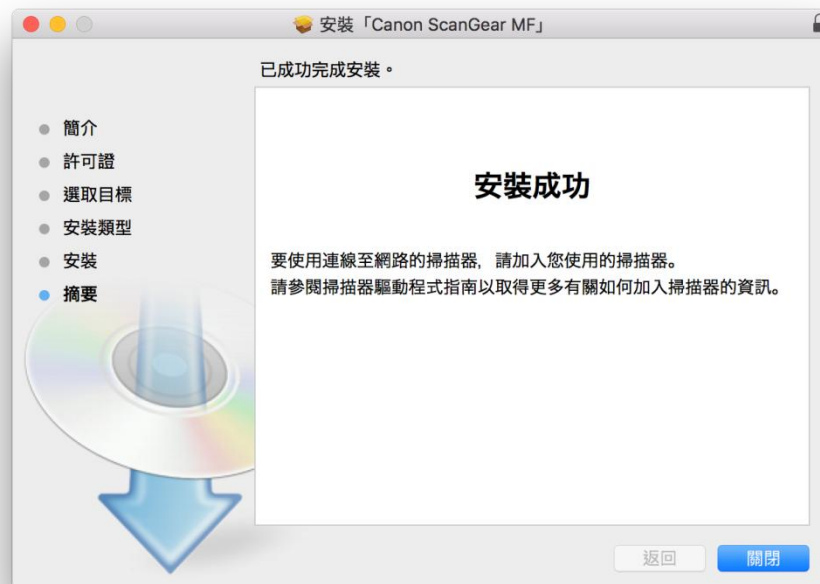


19. 完成安裝驅動程式後需新增印表機，到「系統偏好設定」，選「印表機與掃描器」
Go to “System Preferences” and open “Printer and Scanner”



20. 選取左下角「+」按鈕，選「加入印表機或掃描器」
Click the “+” button and select “Add printer or Scanner”



21. 名稱選擇「Canon MF756」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF750 series」按「加入」，新增印表機驅動程式
Choose the Name “Canon MF756” with “Bonjour multifunction”, and confirm selected “Canon MF750 series” in “Use”, then click “Add”

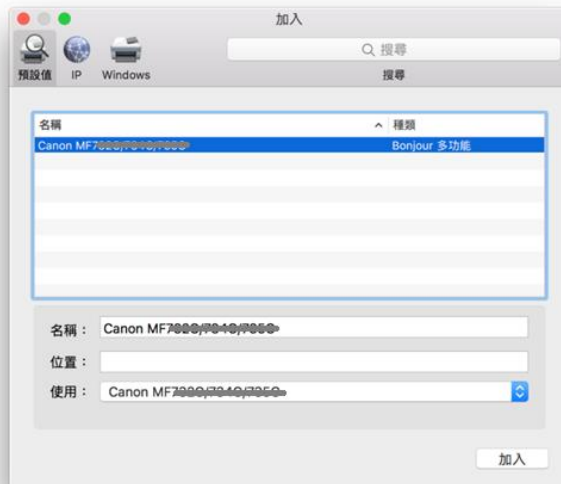


22. 再一次按左下角「+」按鈕，選「加入印表機或掃描器」，名稱選擇「Canon MF756」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF750 Series FAX」按「加入」，新增傳真驅動程式
To add FAX driver, click the “+” button and select “add printer or scanner, choose the name “Canon MF756” with “Bonjour multifunction”, and confirm selected “Canon MF750 Series FAX” in “Use”, then click “Add”



23. 網絡掃描需新增掃描器到 MF Scan Utility，到應用程式 > Canon MF Utilities 開啟 MF Scan Utility，第一次開啟時會出現下圖錯誤字句，網路掃描器視窗會自動開啟，按左下角「+」號新增掃描器

A network scanner need to add into MF Scan Utility, go to "Application" -> "Canon MF Utilities" and run the MF Scan Utility, below error message will show when first time launch, network Scanner Setting windows open automatic, click the "+" button add scanner

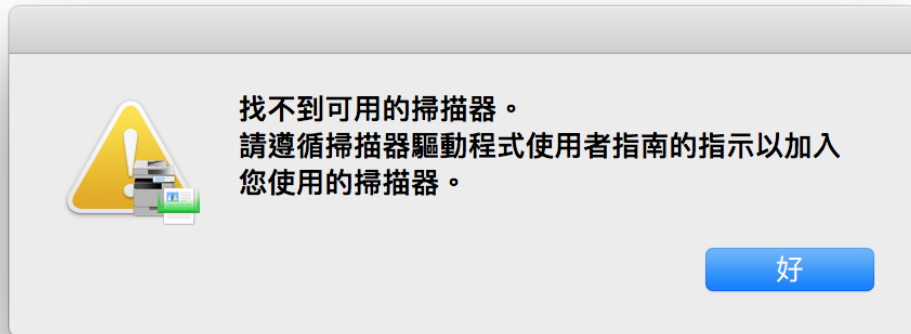

24. 選擇「Canon MF756」，按「新增」
Choose “Canon MF756” and then click “Add”



25. 完成以上設定後已可使用印表機作打印、傳真及掃描功能
Setup completed. Print, fax and scan functions are ready to use

-完-
-End-