#### 透過USB連接安裝LBP843Cx印表機的驅動程式步驟 (以Win 10作示範) LBP843Cx printer driver Installation Guide via USB connection (Win 10 as example)

#### \*\*注意:安裝驅動程式前請勿接駁USB線,以免系統發生錯誤\*\*

\*\* Please don't plug the USB cable until the driver asked to do so

1. 到佳能網站<u>http://support-hk.canon-asia.com/</u> ,選擇相關的印表機型號及下載印表機的驅動程式

(Go to: <u>http://support-hk.canon-asia.com/</u>, select related printer model, and download the printer driver)

2. 下載的文件以自解壓縮檔檔案(.exe格式)保存在指定的文件夾中 The self extractor file (.exe format) is saved to specified folder

📙   🛃 📜 🖛   Dow	nloa	ds				_		) ×
檔案 常用 共	用	檢視						~ ?
$\leftarrow \rightarrow \land \uparrow$	> Do	ownloads	~	U	搜尋	<sup>‡</sup> Downlo	ads	Q
📌 快速存取	^	名稱		修改	日期			類型
鳥 泉面 🖌 🖌	*	🕵 UFRII_Driver_V2170_W64_uk_EN_20		23/5	/2016	5 17:11		應用程式
🖡 下載 🛛 🖌	*							
📔 文件 🗾 🦻	r							
▶ 圖片 🚽	r							
🌸 iCloud 照片 ,	r							
iCloud Drive 🗴	r							
📙 CIG								
📜 imagecapture								
📜 LBP151dw								
📜 ScreenShot	~	<						>
2 個項目								

 打開「UFRII\_Driver\_\*\*\*.exe」檔案。將在同一文件夾中創建新文件夾,如打開文件解壓縮時出現「使用 者帳戶控制」選項,按「是」,打開「UFRII\_Driver \_\*\*\*」文件夾 Open "UFRII\_Driver \_\*\*\*.exe" file, a new folder will be created. If "User Account Control" window shows up, click "Yes", and open "UFRII\_Driver \_\*\*\*" file folder

🛃 📜 🖛   De	ownloa	ads				_		$\times$
檔案常用	共用	檢視						$\sim$ (
← → · <b>↑</b> 🖡	> D	ownloads			ٽ ×	搜尋 Downloa	ıds	م
📌 快速存取	^	名稱		^	修改	日期	類型	
📙 桌面	*	💐 UFR	II Driver V217(	EN_20	23/5	5/2016 17:11	應用	程式
📜 下載	*	UFR	II_Driver_V2170	)_W64_uk_EN_20	23/5	5/2016 17:11	檔案	資料水
📔 文件	*							
┣┛ 圖片	*							
🌸 iCloud 照片	*							
iCloud Driv	e 🖈							
📜 CIG								
📜 imagecaptu	ure							
📜 LBP151dw								
📜 ScreenShot								
2 個項目								

#### 4. 開啓"Setup.exe"檔案

Open '	"Setup.	exe"	file
--------	---------	------	------

📜   🛃 📜 🗢   UFRII_Dr	iver_V2170_W64_uk_EN_20	_	
檔案 常用 共用	檢視		~ ?
$\leftarrow \rightarrow \checkmark \uparrow \blacksquare \rightarrow D$	ownlo > UFRII_Driver_V2170_W64_uk_EN_20	✔ U 搜尋 UFRII_Driv	ver_V21 🔎
▲ 快速存取	名稱 ^	修改日期	類型
📜 桌面 🛛 🖈	📙 Driver	23/5/2016 17:11	檔案資料夾
📜 下載 🛛 🖈	Installation_Guide	23/5/2016 17:11	檔案資料夾
文件 🖌 🖈	📜 misc	23/5/2016 17:11	檔案資料夾
▶ 圖片 ★	📑 Readme	14/3/2016 14:12	HTML 應用程
● iCloud 照片 🖈	Setup	1/3/2016 0:00	應用程式
	🛐 Setup	1/3/2016 0:00	組態設定
iCloud Drive 🖈			
CIG			
📜 imagecapture			
📜 LBP151dw			
📜 ScreenShot 🗸	<		>
6 個項目			

#### 5. 按「Yes」

#### Click "Yes"

뽳 UFR II Printer Driver - Ver. 21.70

#### License Agreement

Please read the following license agreement completely and carefully. Click [Yes] to agree to the license agreement.

#### CANON SOFTWARE LICENSE AGREEMENT

#### IMPORTANT

This is a legal agreement ("Agreement") between you and Canon Inc. ("Canon") and governing your use of Canon's software programs including the related manuals or any printed material thereof (the "SOFTWARE") for certain Canon's copying machines, printers and multifunctional peripherals (the "Products").

 $\times$ 

## READ CAREFULLY AND UNDERSTAND ALL OF THE RIGHTS AND RESTRICTIONS DESCRIBED IN THIS AGREEMENT BEFORE ~

Yes


No

Do you agree to the terms in license agreement?


選「USB Connection」,按「Next >」 6. Choose "USB Connection", and click "Next >" 뽳 UFR II Printer Driver - Ver. 21.70  $\times$ The UFR II printer driver will be installed on your computer. Select a setup method, and then click [Next]. Printer Setup ) Standard Search for printers on the network and install. Reactivate Printers in the Sleep Mode and Search ) Custom Specify a port or an IP address manually to install drivers of local or network printers. You can also specify other settings, such as setting a printer as a shared printer USB Connection Connect the printer with a USB cable and install. < Back Next > Cancel

7. 按「是(Y)」

### Click "Yes(Y)"

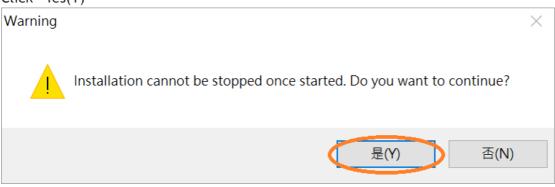

# 以USB線接駁印表機及電腦,然後開啟印表機 Connect printer and computer with the USB cable, and then turn on the printer USB Connection



Follow the steps below to install the printer driver:

Status:

- 1. Connect the USB cable to the computer.
- 2. Connect the USB cable to the printer.

3. If the printer power is off, turn on the printer. The printer will be recognized automatically and installation of printer drivers will start.

If the printer is not automatically recognized even with the USB cable connected, disconnect the cable from the printer after turning off the printer, and then connect the cable again.

	Sk	cip

9. 安裝完成,建議剔選「Restart My Computer Now」,按「Restart」重新開機 Installation is completed. We recommend to choose "Restart My Computer Now", and click "Restart" to reboot computer

📚 UFR II Printer Driver - Ver	r. 21.70	$\times$
OFR II Printer Driver - Ver	Installation is complete.	×
	Restart	$\mathbf{D}$

-完-

-End-