


MF249dw在MAC OSX 透過有線LAN連線連接印表機之驅動程式步驟 The Driver installation procedure for MF249dw in MAC OSX (Via LAN)

先將打印機連接到網路，詳細可參考以下步驟


Connect printer to network router first, refer to following procedure

1. 開啟印表機
Switch on the Printer

2. 在主畫面中點選c. 「功能表」
Tap c. “Menu” in the Home Screen

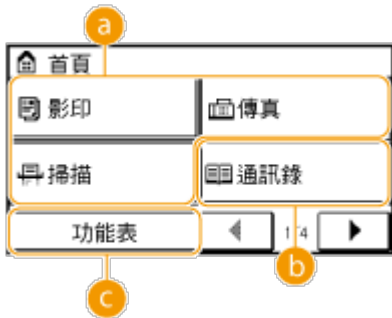

3. 點選「網路設定」
Tap “Network Settings”
若顯示PIN碼輸入畫面，請使用數字鍵輸入PIN碼，然後點選「套用」
If a screen for entering a PIN is displayed, enter the PIN with the numeric keys and tap “Apply”

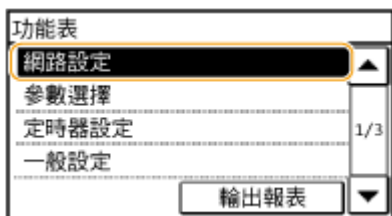

4. 點選「有線區域網路」
Tap “Select Wired/Wireless LAN” and tap Wired LAN




5. 將打印機連接路由器，詳細可參考以下步驟
Connect printer to network router, refer to following procedure

6. 使用區域網路纜線將本機連接到路由器

推入接頭，直至聽到喀嗒聲

Connect the machine to a router by using a LAN cable, push the connector in until it clicks into place

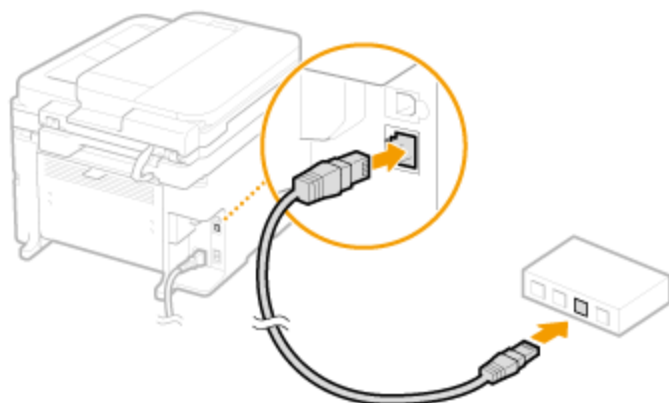

7. 等待約 2 分鐘

Wait approximately 2 minutes

等待時，會自動設定 IP 位址

While you wait, the IP address is set automatically

下載及安裝步驟

Download and Driver Installation Procedure

8. 到佳能網站<http://support-hk.canon-asia.com/>，選擇相關的印表機型號及下載印表機的驅動程式

Go to: <http://support-hk.canon-asia.com/> , select related printer model, then download the printer driver

SUPPORT & DOWNLOAD

Select your product from the menus below:

1. Choose a product category

Laser Printers

2. Choose a product series

ImageCLASS


3. Choose a product model

imageCLASS MF249dw

4. Choose type of document

Drivers & Softwares

9. 下載完成後開啟該檔案，按「MF_Printer_Installer.pkg」
Open file after download finished, press “MF_Printer_Installer.pkg”

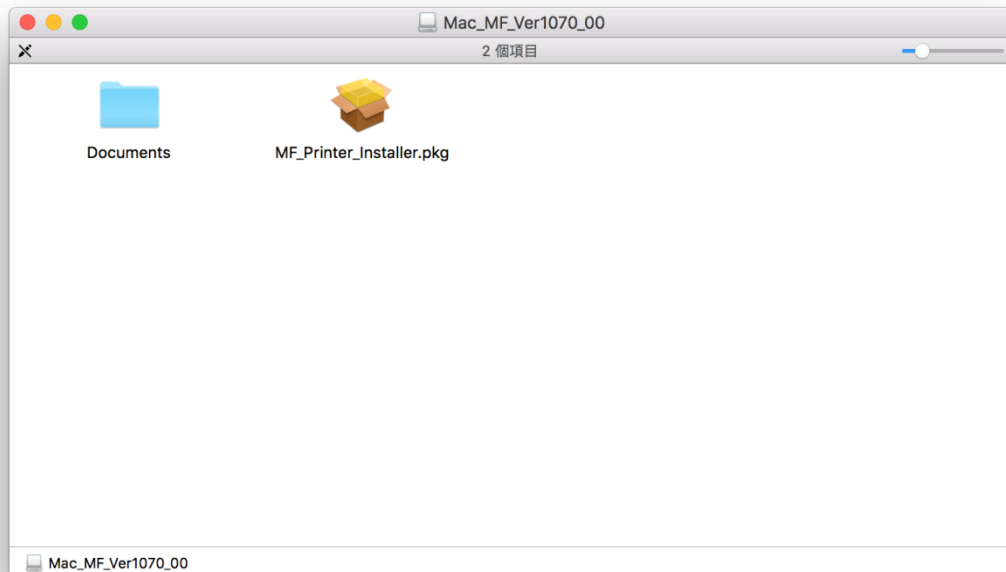


10. 按「繼續」
Choose “Next”




11. 按「繼續」然後按「同意」
Choose “Next” and then choose “Agree”



12. 按「安裝」
Choose "Install"

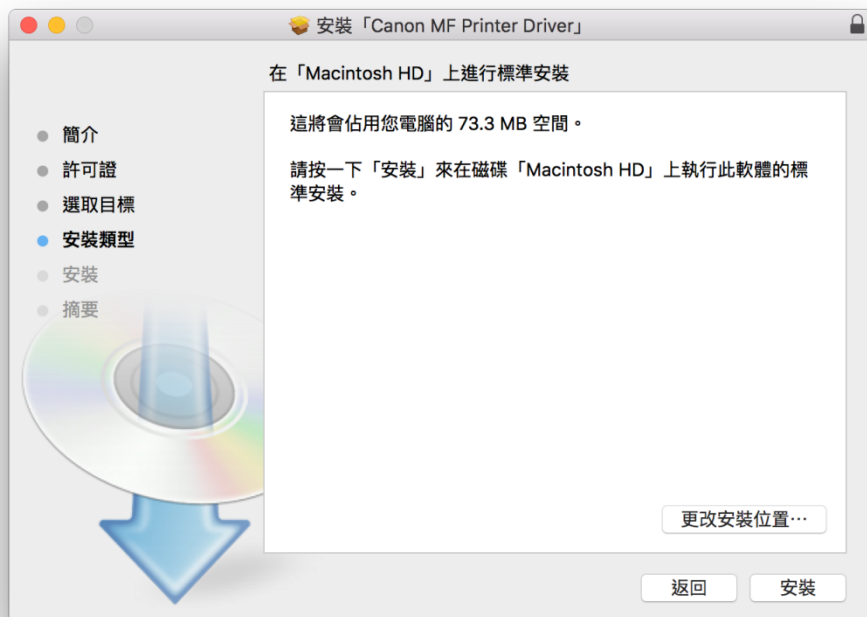

13. 等待安裝程序完成
Waiting for the installation progress

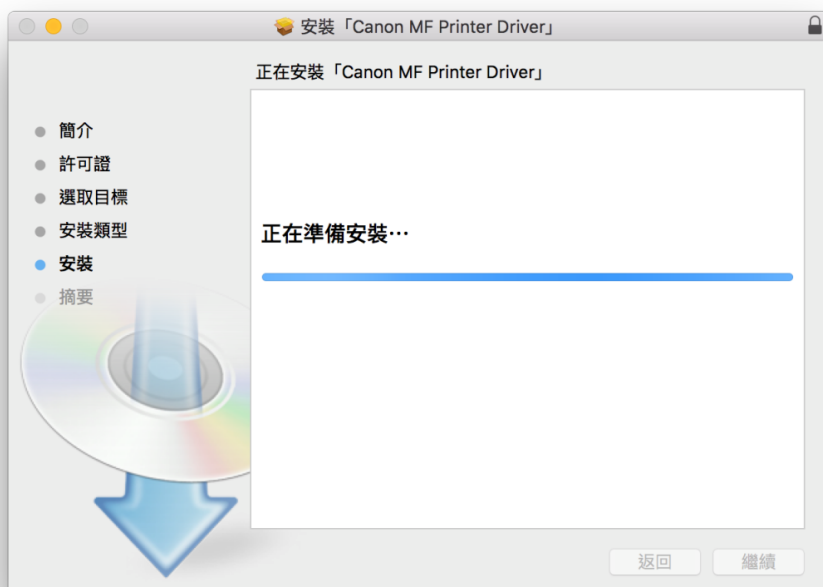

14. 按「關閉」
Choose “Close”




15. 到佳能網站<http://support-hk.canon-asia.com/>，選擇相關的印表機型號及下載印表機的驅動程式
Go to: <http://support-hk.canon-asia.com/> , select related printer model, then download the printer driver

SUPPORT & DOWNLOAD

Select your product from the menus below:

1. Choose a product category
2. Choose a product series
3. Choose a product model
4. Choose type of document

16. 下載完成後開啟該檔案，按「Canon_FAX_Installer.pkg」
Open file after download finished, press “Canon_FAX_Installer.pkg”)

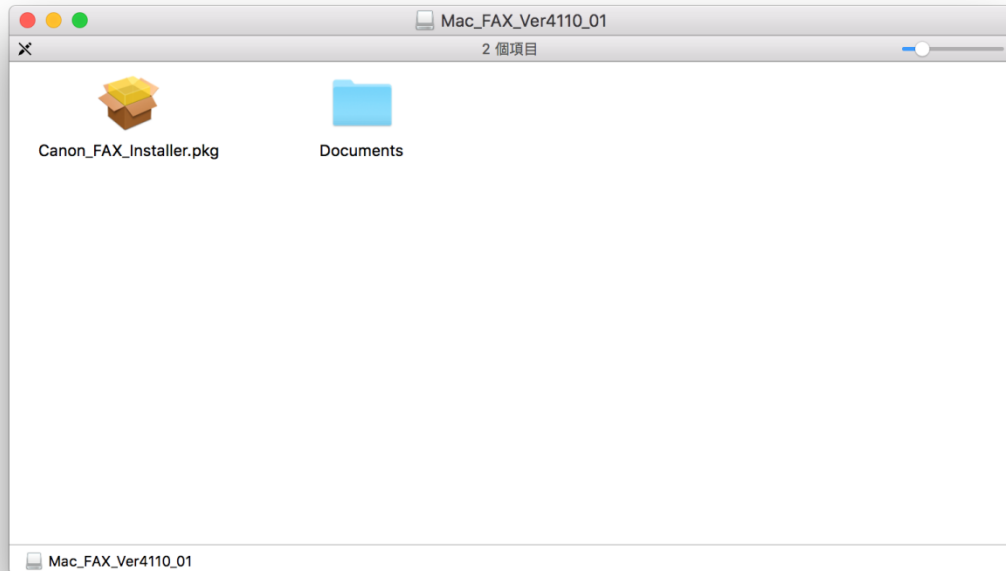

17. 按「繼續」
Choose “Continue”




18. 按「繼續」然後按「同意」
Choose “Continue “and then choose” Agree”



19. 按「安裝」
Choose Install



20. 等待安裝程序完成
Waiting for the installation progress

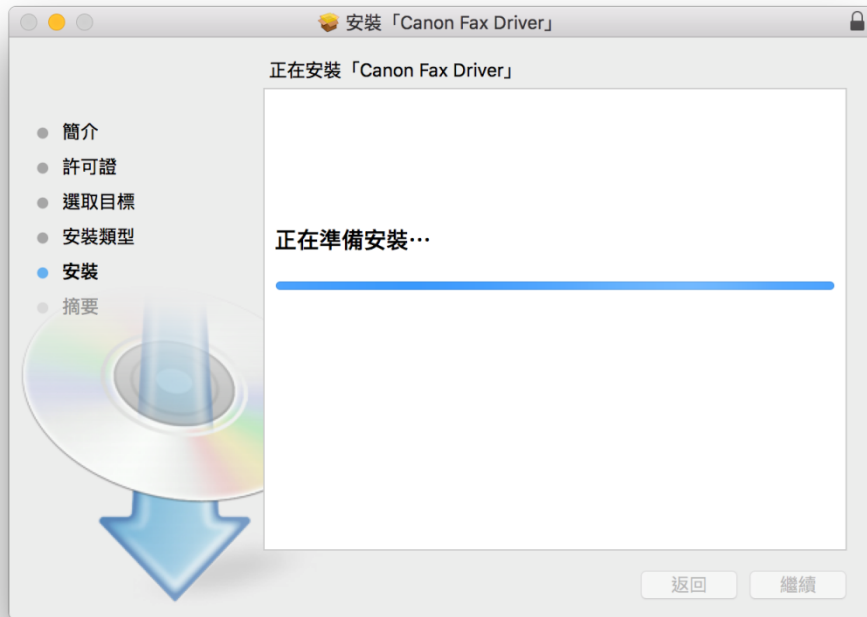

21. 按「關閉」
Choose "Close"



22. 到佳能網站<http://support-hk.canon-asia.com/>，選擇相關的印表機型號及下載印表機的驅動程式

Go to: <http://support-hk.canon-asia.com/> , select related printer model, then download the printer driver

SUPPORT & DOWNLOAD

Select your product from the menus below:

1. Choose a product category

Laser Printers

2. Choose a product series

ImageCLASS


3. Choose a product model

imageCLASS MF249dw


4. Choose type of document

Drivers & Softwares

23. 下載完成後開啟該檔案，按「Canon_ScanGear_MF.pkg」
Open file after download finished, press
“Canon_ScanGear_MF.pkg”

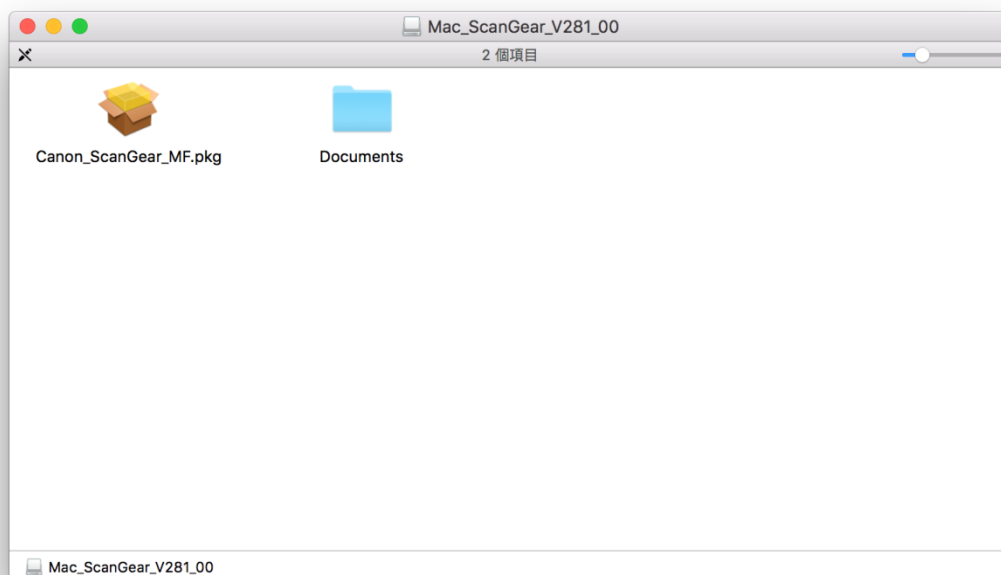


24. 按「繼續」
Choose “Continue”

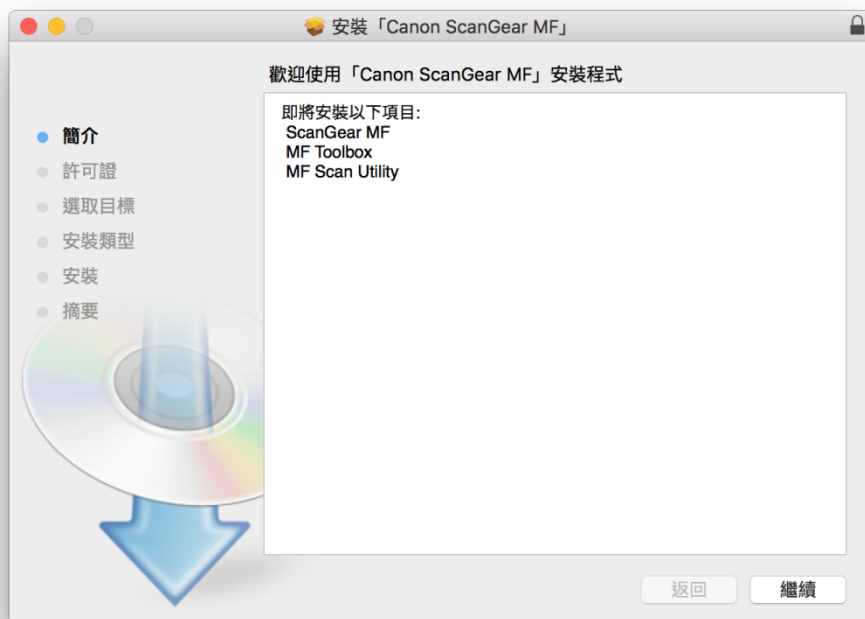


25. 按「繼續」然後按「同意」
Choose “Continue” and then choose “Agree”




26. 按「安裝」
Choose “Install”

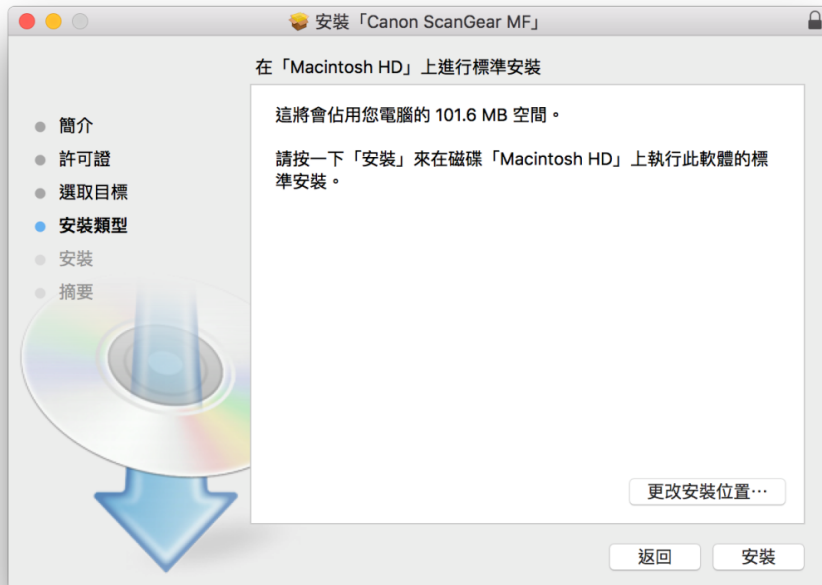

27. 等待完成安裝 程序
Waiting for the installation progress

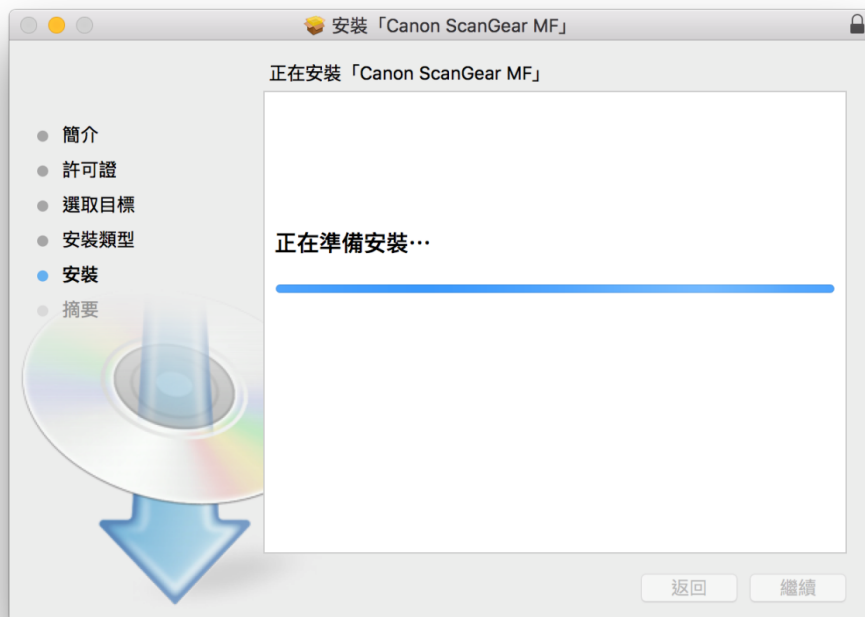

28. 按「關閉」
Choose “Close”

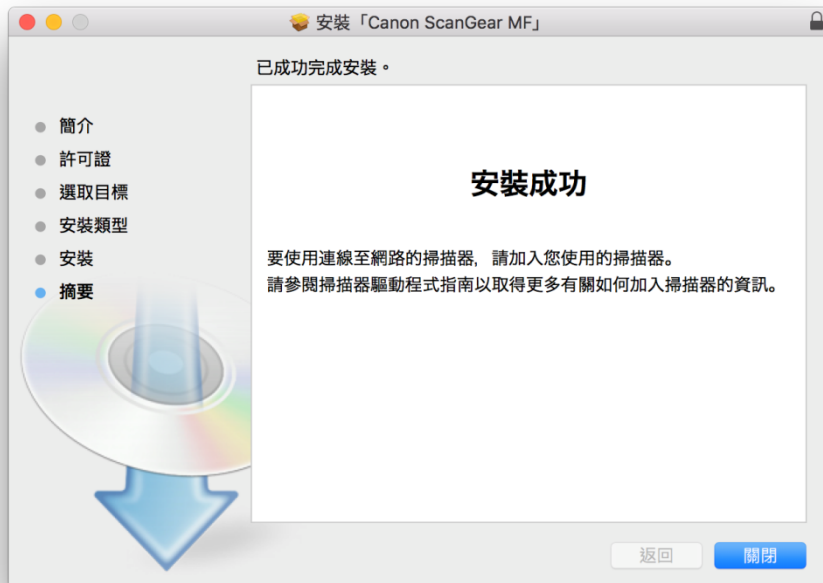


29. 完成安裝驅動程式後需新增印表機，到「系統偏好設定」，選「印表機與掃描器」 Go to “System Preferences” and choose “Print and Scan”



30. 選取左下角「+」按鈕，選「加入印表機或掃描器」
Click the “+” button and choose “Add printer or Scanner”




31. 名稱選擇「Canon MF240」，種類選擇「Bonjour多功能」，使用選擇「Canon MF240 series」按「加入」，新增印表機驅動程式（下圖以MF230為例）
Choose the Name with Canon MF 240 Series in “Use”, “Kind” as “Bonjour multifunction”, then click “Add” (below use MF230 series as example)

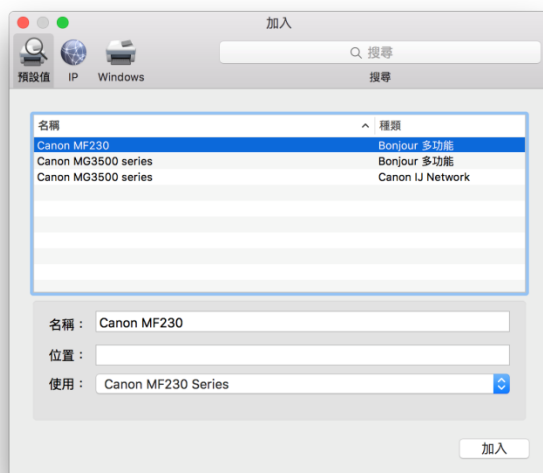

32. 再一次按左下角「+」按鈕，選「加入印表機或掃描器」，名稱選擇「Canon MF 240」，種類選擇「Bonjour多功能」，使用選擇「Canon MF240 Series FAX」按「加入」，新增傳真驅動程式（下圖以MF230作例）

Click the “+” button and select “add printer or scanner”, choose the Name with Canon MF 240 Series Fax in “Use”, “Kind” as “Bonjour multifunction”, then Click “Add” (below use MF230 series as example)

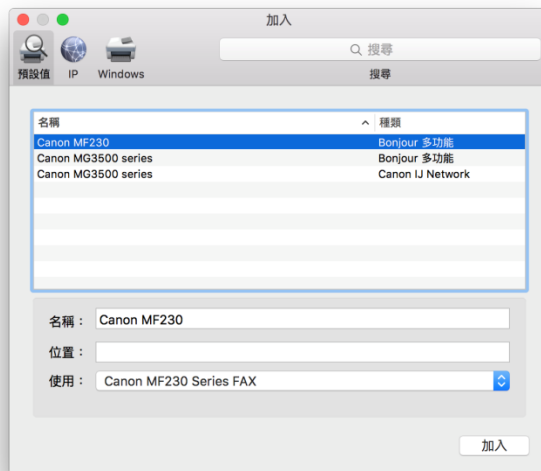

33. 網絡掃描需新增掃描器到MF Scan Utility，到應用程式 > Canon MF Utilities開啟MF Scan Utility，按左上角Canon MF Scan Utility，選擇網路掃描器設定...

Need to add the network scanner to the MF toolbox, go to “Application “-> “Canon MF Utilities” to run the MF Scan Utility, click the “Canon MF Scan Utility” on the top left corner, and choose Network Scanner Setting...”



34. 按左下角「+」號新增掃描器
Click the “+” button add scanner



35. 選擇「Canon MF240」，按「新增」（下圖以MF230作例）
Choose “Canon MF240” and then click “Add” (below use MF230 series as example)



36. 完成以上設定後已可使用印表機作打印、傳真及掃描功能
Setup completed. Print, fax and scan functions are ready to use