


MF249dw 在 MAC OSX 透過無線 LAN 連線連接印表機之驅動程式步驟 The Driver installation procedure for MF249dw in MAC OSX (Via Wi-Fi)


先將印表機連接到網路，詳細可參考以下步驟

Connect printer to network router first, refer to following procedure

1. 開啟印表機
Switch on the Printer
2. 在主畫面中點選 c. 「功能表」
Tap c. "Menu" in the Home Screen

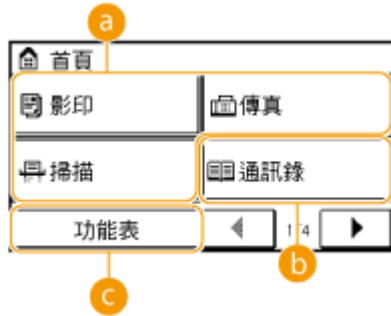

3. 點選「網路設定」
Tap "Network Settings"
若顯示 PIN 碼輸入畫面，請使用數字鍵輸入 PIN 碼，然後點選「套用」
If a screen for entering a PIN is displayed, enter the PIN with the numeric keys and tap "Apply"

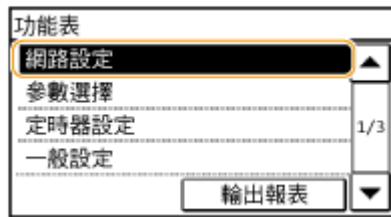

4. 點選「無線區域網路」
Tap "Select Wired/Wireless LAN" and tap Wireless LAN




5. 點選 <SSID 設定>
Tap “SSID setting”



6. 點選 <選擇存取點>
Tap “Select Access Point”




7. 選擇無線區域網路路由器，選擇與您記下的 SSID 相符的路由器
Select the router who's SSID matches the one that you have written down

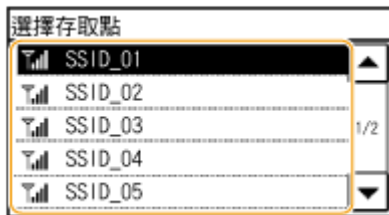


8. 使用數字鍵輸入網路金鑰（路由器密碼），然後點選 <套用>
Enter the network key using the numeric keys, and tap “Apply”

WEP

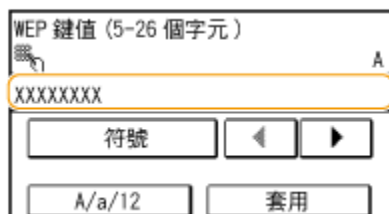

WPA-PSK 或 WPA2-PSK

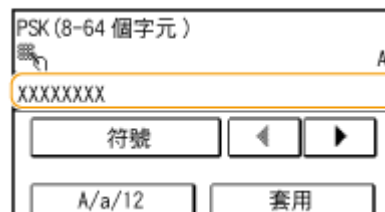


9. 點選 <是>

Tap "Yes"



10. 偵測到無線路由器時，Wi-Fi 指示燈閃爍
(The Wi-Fi indicator blinks when a wireless router is detected)

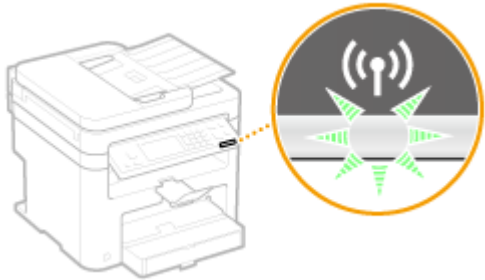

11. 設定完成時，會顯示以下畫面，約 2 秒後 Wi-Fi 指示燈隨即亮起

When the setup is completed, the screen below is displayed, and approximately 2 seconds later, the Wi-Fi indicator lights up




等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until the IP address settings of the machine are completed

下載及安裝步驟

Download and Driver Installation Procedure

1. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF249dw/model>，選擇及下載印表機的驅動程式 **MF Printer Driver & Utilities for Macintosh**
(Go to <https://hk.canon/en/support/imageCLASS%20MF249dw/model>, select and download the printer driver **MF Printer Driver & Utilities for Macintosh**)
2. 下載完成後開啟該檔案，按「MF_Printer_Installer.pkg」
Open file after download finished, press “MF_Printer_Installer.pkg”

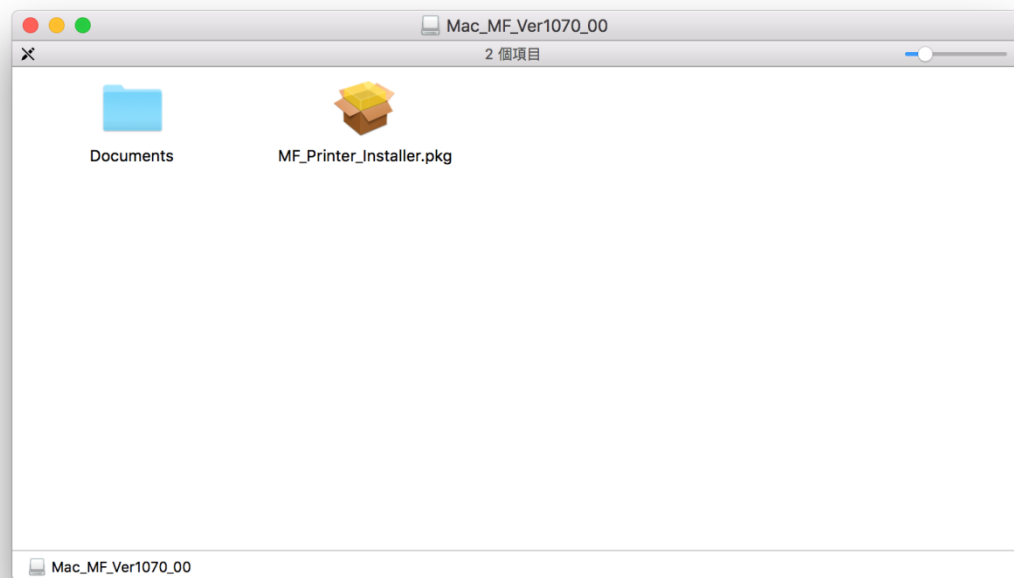

3. 按「繼續」
Choose “Next”




4. 按「繼續」然後按「同意」
Choose “Next” and then choose “Agree”



- 按「安裝」
Choose "Install"



- 等待安裝程序完成
Waiting for the installation progress

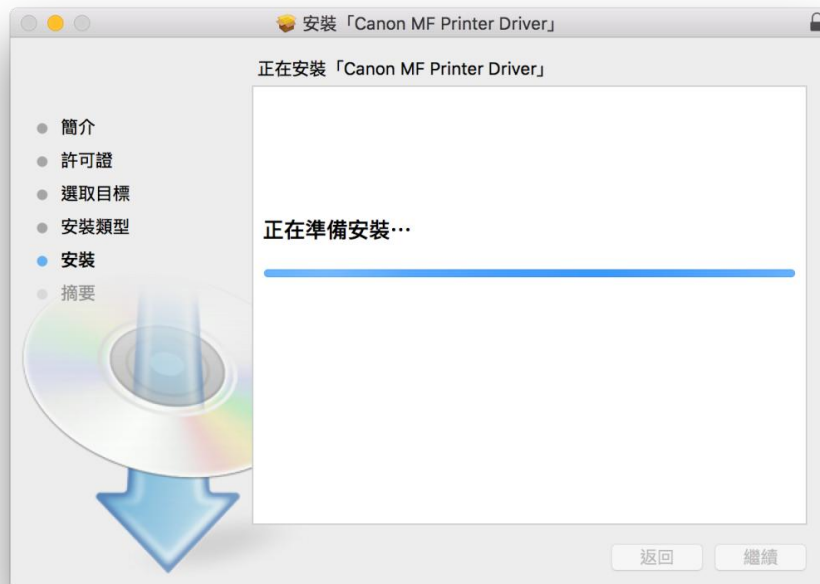


- 按「關閉」
Choose “Close”



- 到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF249dw/model>，選擇及下載印表機的驅動程式 **Fax Driver & Utilities for Macintosh**
Go to: <https://hk.canon/en/support/imageCLASS%20MF249dw/model> , select and download the printer driver **Fax Driver & Utilities for Macintosh**

9. 下載完成後開啟該檔案，按「Canon_FAX_Installer.pkg」
Open file after download finished, press “Canon_FAX_Installer.pkg”)

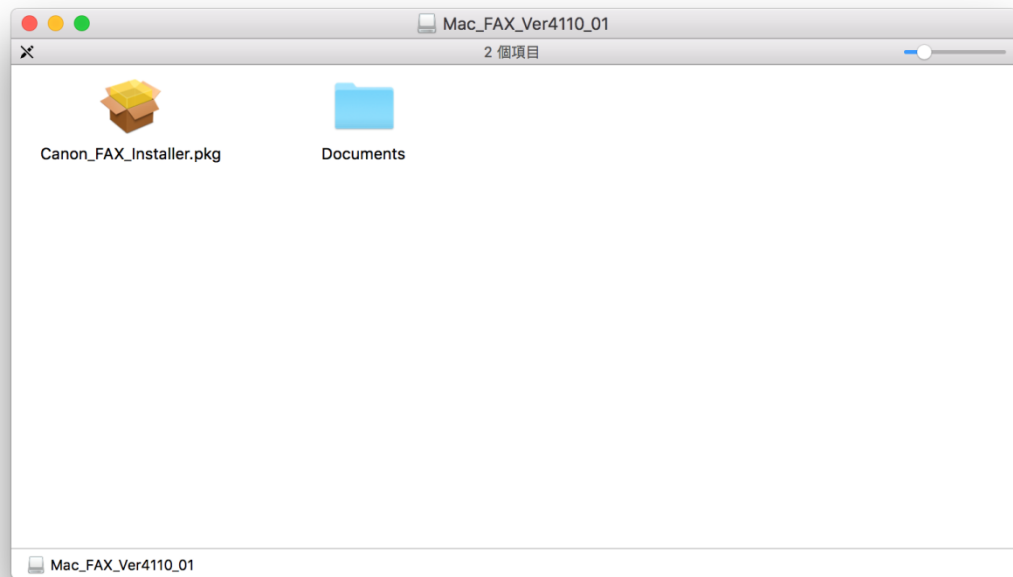


10. 按「繼續」
Choose “Continue”




11. 按「繼續」然後按「同意」
Choose “Continue” and then choose “Agree”



12. 按「安裝」
Choose Install

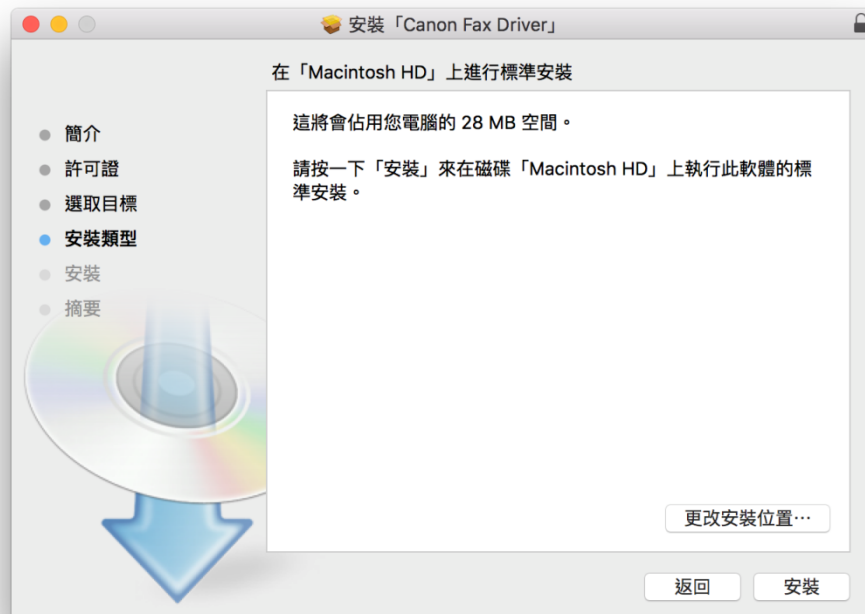


13. 等待安裝程序完成
Waiting for the installation progress

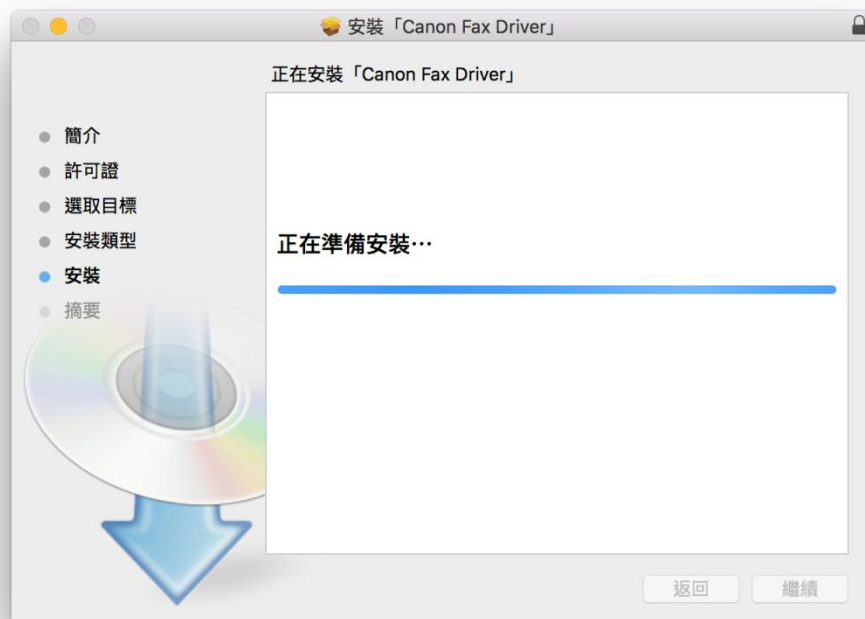

14. 按「關閉」
Choose "Close"



15. 到佳能網站 <https://hk.canon/en/support/imageCLASS%20MF249dw/model>，選擇及下載印表機的驅動程式 **Scanner Driver & Utilities for Macintosh**
Go to: <https://hk.canon/en/support/imageCLASS%20MF249dw/model> , select and download the printer driver **Scanner Driver & Utilities for Macintosh**
16. 下載完成後開啟該檔案，按「Canon_ScanGear_MF.pkg」
Open file after download finished, press “Canon_ScanGear_MF.pkg”

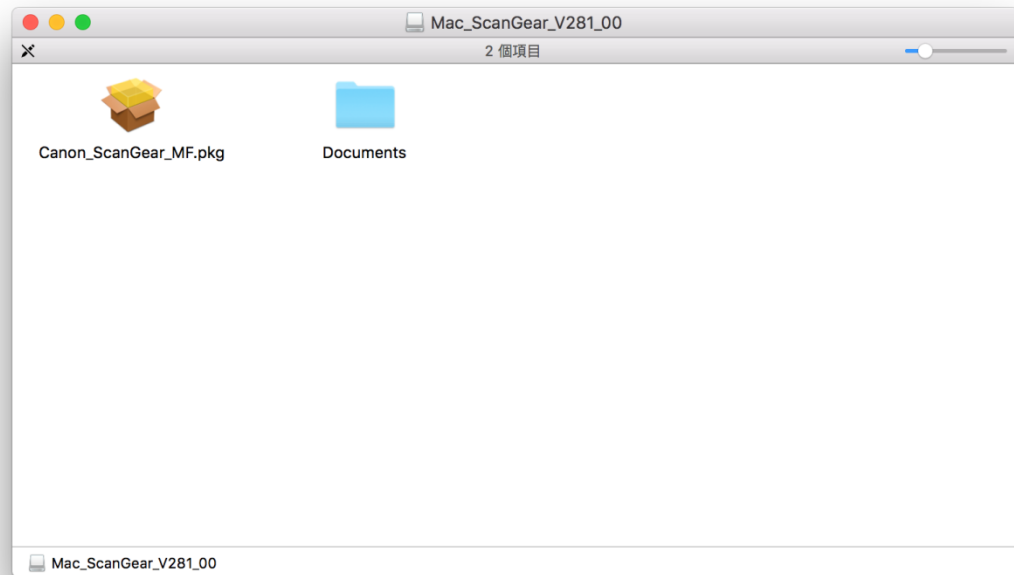


17. 按「繼續」
Choose “Continue”



18. 按「繼續」然後按「同意」
Choose “Continue” and then choose “Agree”




19. 按「安裝」
Choose "Install"

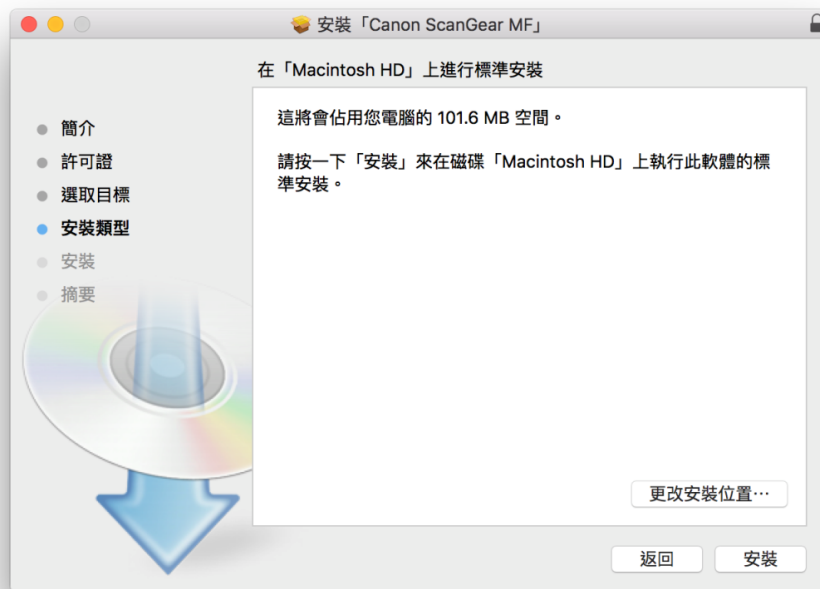

20. 等待完成安裝 程序
Waiting for the installation progress



21. 按「關閉」
Choose “Close”

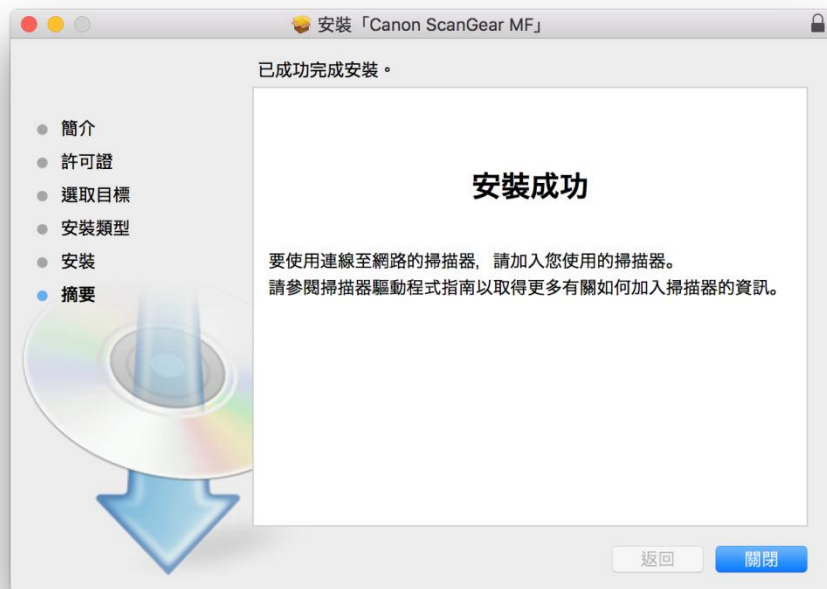


22. 完成安裝驅動程式後需新增印表機，到「系統偏好設定」，選「印表機與掃描器」
Go to “System Preferences” and choose “Print and Scan”



23. 選取左下角「+」按鈕，選「加入印表機或掃描器」
Click the “+” button and choose “Add printer or Scanner”



24. 名稱選擇「Canon MF240」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF240 series」按「加入」，新增印表機驅動程式（下圖以 MF230 為例）
Choose the Name with Canon MF 240 Series in “Use”, “Kind” as “Bonjour multifunction”, then click “Add” (below use MF230 series as example)

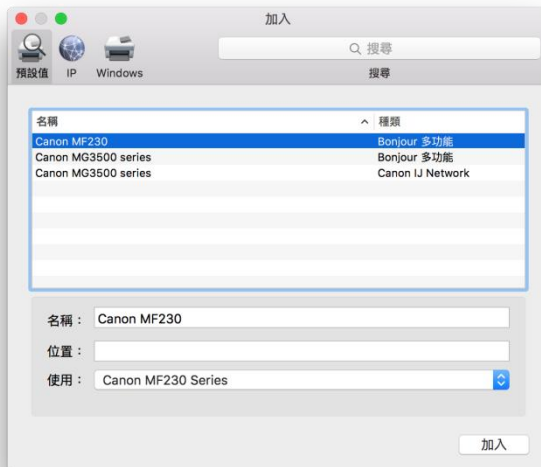

25. 再一次按左下角「+」按鈕，選「加入印表機或掃描器」，名稱選擇「Canon MF 240」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF240 Series FAX」按「加入」，新增傳真驅動程式（下圖以 MF230 作例）

Click the “+” button and select “add printer or scanner”, choose the Name with Canon MF 240 Series Fax in “Use”, “Kind” as “Bonjour multifunction”, then click “Add” (below use MF230 series as example)




26. 網絡掃描需新增掃描器到 MF Scan Utility，到應用程式 > Canon MF Utilities 開啟 MF Scan Utility，按左上角 Canon MF Scan Utility，選擇網路掃描器設定...

Need to add the network scanner to the MF toolbox, go to “Application “-> “Canon MF Utilities” to run the MF Scan Utility, click the “Canon MF Scan Utility” on the top left corner, and choose Network Scanner Setting...”



27. 按左下角「+」號新增掃描器
Click the “+” button add scanner

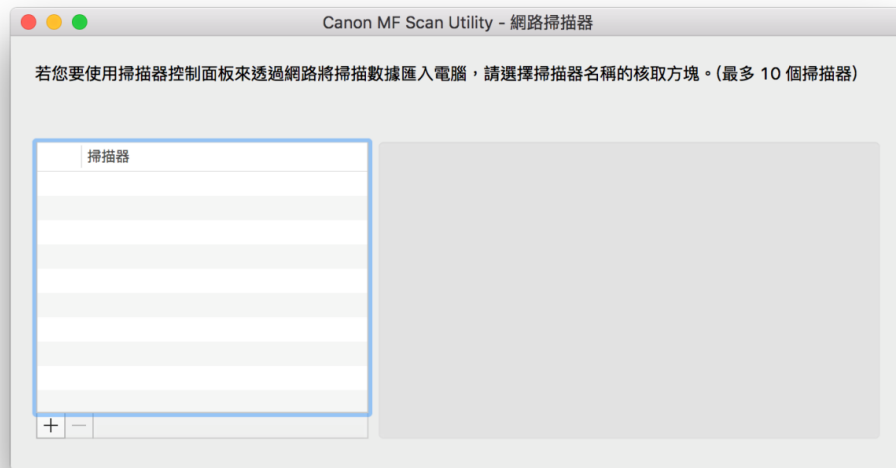

28. 選擇「Canon MF240」，按「新增」（下圖以 MF230 作例）
Choose “Canon MF240” and then click “Add” (below use MF230 series as example)



29. 完成以上設定後已可使用印表機作打印、傳真及掃描功能
Setup completed. Print, fax and scan functions are ready to use

-完-
-End-