

在 Mac OS 以有線 LAN 方式安裝及連接 PIXMA PRO-200S 打印機

Installing PIXMA PRO-200S on Mac OS via wired LAN connection

以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。

The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.


有線設定 Wired LAN Setup

1. 確保在開始有線連接設定之前，印表機已開啟。

如果電源開啟，電源指示燈將亮起。


Make sure printer is turned on before starting wired connection setup.

If the power is on, the **ON** lamp will be lit.

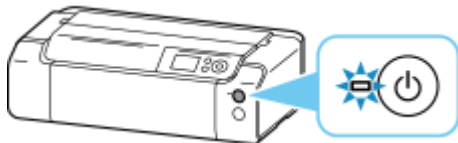


2. 需要乙太網路電纜線(另行出售)。

You will need an Ethernet cable (sold separately).

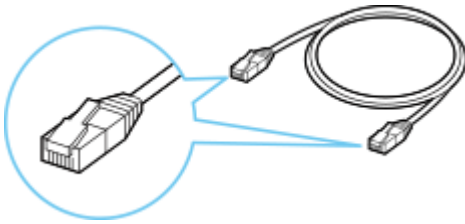


3. 取下位於印表機後部左側連接埠的蓋。

Remove the Cap from the port located on the left side at the back of the printer.

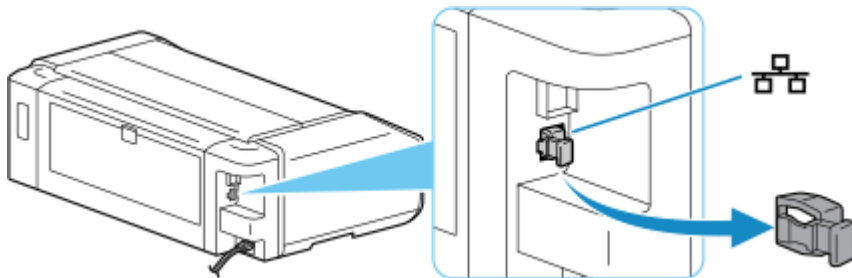

4. 使用乙太網路電纜線連接印表機和網路裝置(路由器等)。
請勿連接到任何其他連接埠。


Connect the printer and a network device (router, etc.) with an Ethernet cable.
Do not connect to any other port.

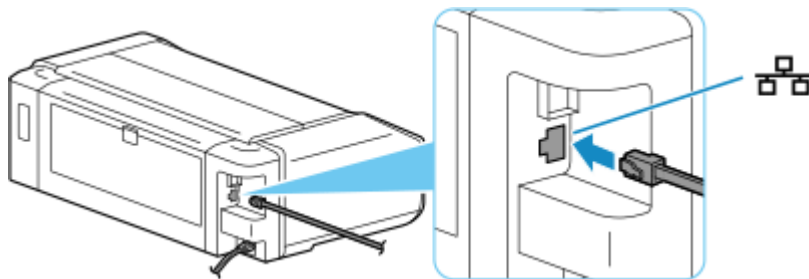

5. 在印表機按主頁按鈕。
Press the **HOME** button on the printer.




6. 使用上或下 (▼▲) 按鈕選擇 **LAN 設定**，然後按 **OK** 按鈕。
Use the up or down (▼▲) button to select **LAN settings** and press the **OK** button.

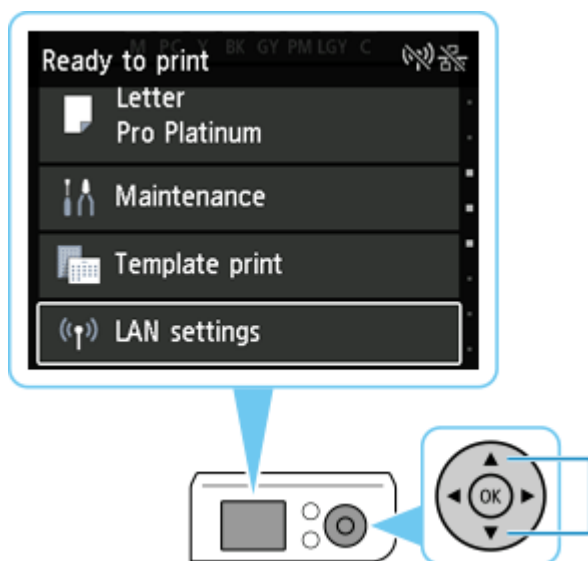


7. 選擇**有線 LAN** 並按 **OK** 按鈕。

Select **Wired LAN** and press the **OK** button.

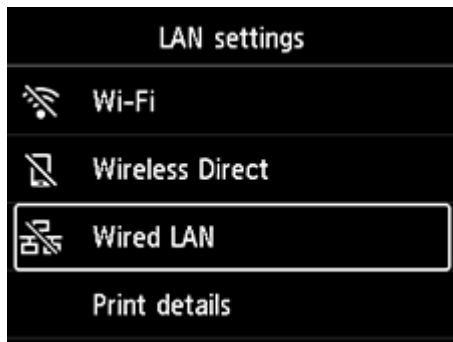


8. 選擇**設定**並按 **OK** 按鈕。

Select **Settings** and press the **OK** button.

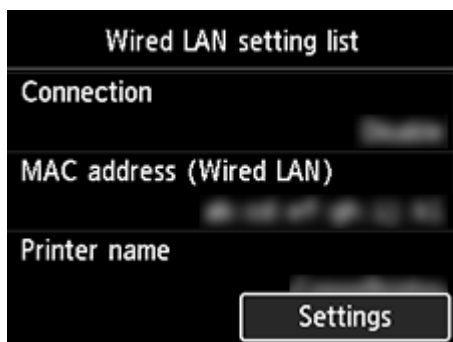


9. 選擇**啟用/禁用有線 LAN** 並按 **OK** 按鈕。

Select **Enable/disable Wired LAN** and press the **OK** button.

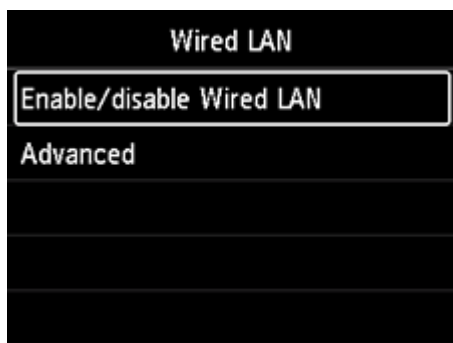


10. 選擇**啟用**並按 **OK** 按鈕。
Select **Enable** and press the **OK** button.

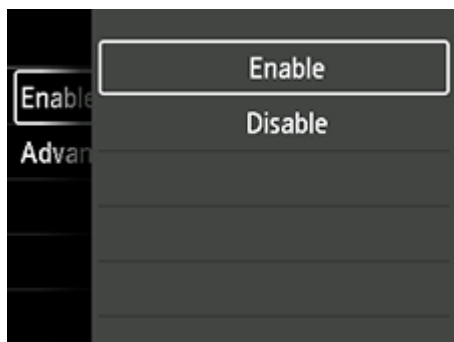


如果顯示以下螢幕

If the following screen appears

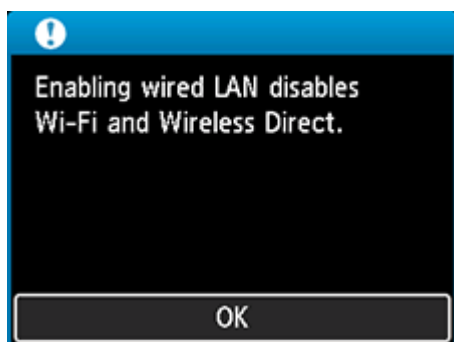

按 **OK** 按鈕，然後繼續執行步驟 11。
Press the **OK** button, and then proceed to step 11.

11. 按**主頁**按鈕。
Press the **HOME** button.

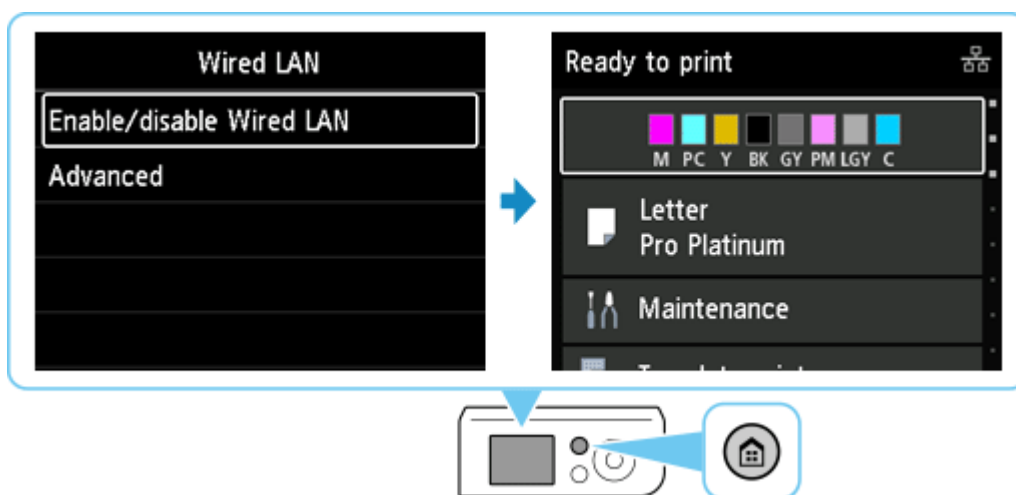

網路連接設定完成。

連接完成後，有線連線標誌  顯示在螢幕的右上方。

The network connection setup is now complete.

Once the connection is complete, the wired LAN icon  appears at the upper right of the screen.

下載及安裝步驟

Driver download and Installation procedure


12. 點擊以下連結下載有關之驅動程式：

Click the link below to download printer driver:

<https://hk.canon/en/support/pixma%20pro-200s/model>

13. 選擇並下載以下檔案

Choose and download the file below

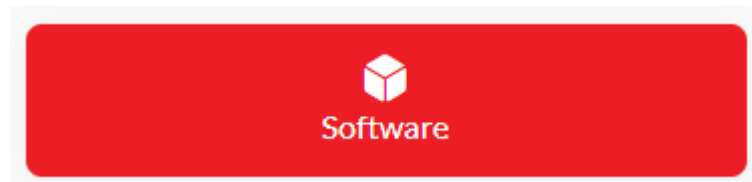


Master Setup (Mac)

<https://hk.canon/en/support/0200641904>

14. 按網頁內的〔Download〕按鈕，下載完成後開啟該檔案安裝

Click [Download] button in the webpage, and then execute the file after download was completed

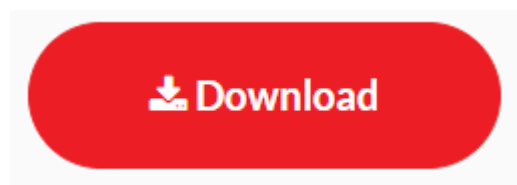

16. 打開軟件後按〔 Master Setup 〕
Click [Master Setup] after open the software



17. 請輸入電腦帳號密碼，再按〔安裝輔助程式〕

Please type in the password of computer account, then click [Install Helper]



18. 在設定新印表機的視窗按〔開始設定〕

Click [Start Setup] on the windows of setting up new printer



19. 正在下載，請等候

Downloading, please wait



20. 按〔是〕同意許可協定

Click [Yes] to accept the license agreement




21. 可選擇是否同意傳送資訊至佳能，按〔同意〕或〔不同意〕

Click [Agree] or [Do not agree] for sending information to Canon Extended Survey Program



22. 請等候


Please wait

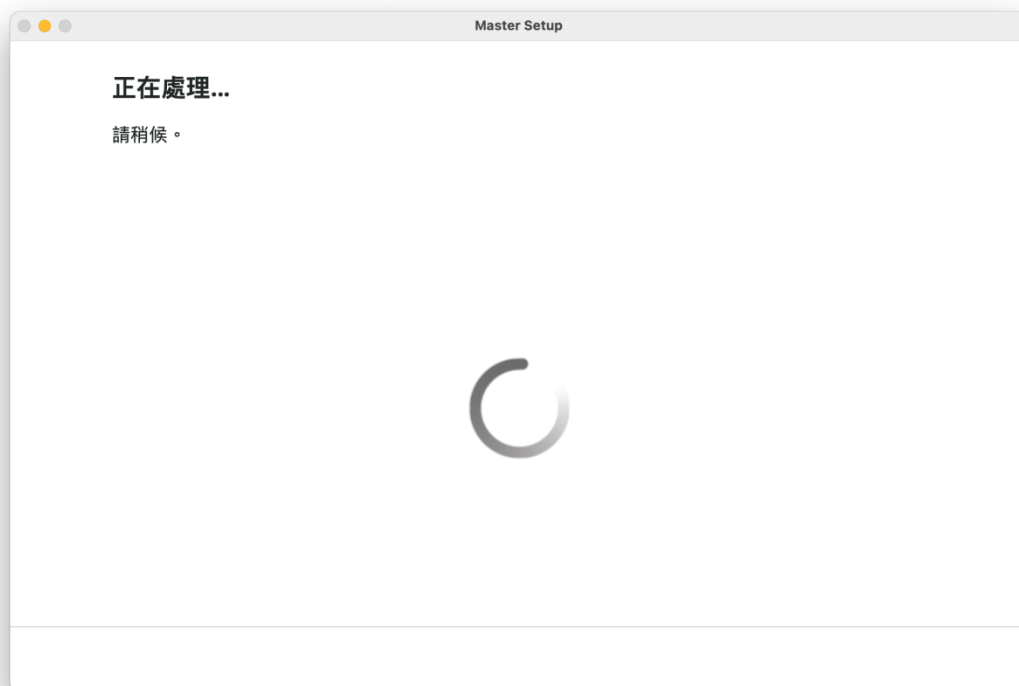


23. 確認印表機電源已開啟，再按〔下一步〕
Confirm power on the printer, then click [Next]



24. 請等候印表機偵測
Please wait for printer detection

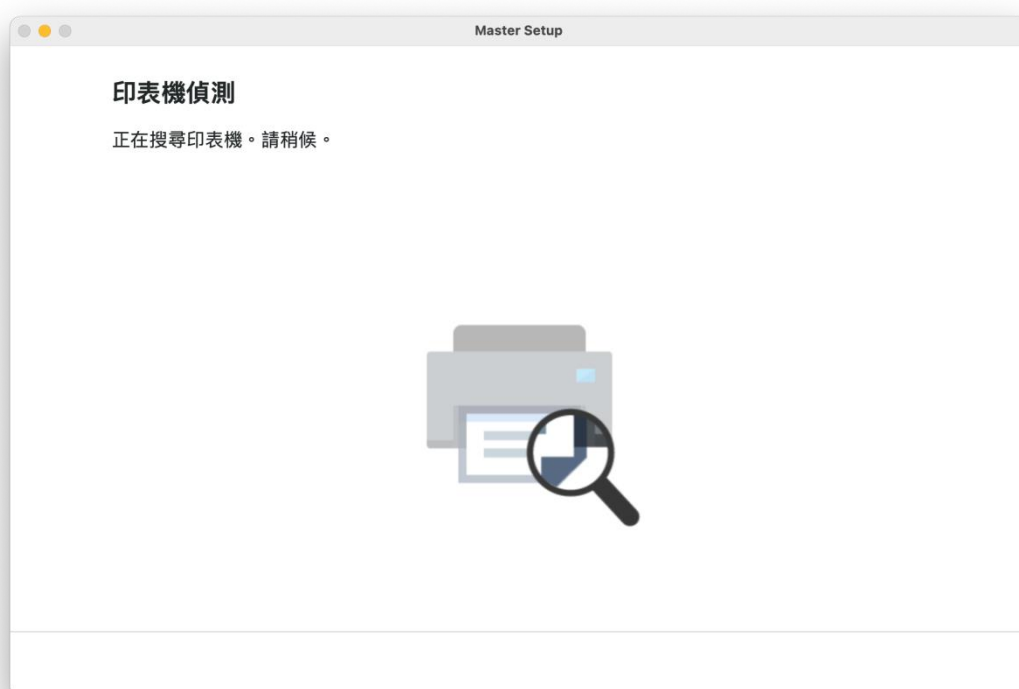

25. 從清單中選擇印表機，再按〔下一步〕
Choose the printer from the list, then click [Next]

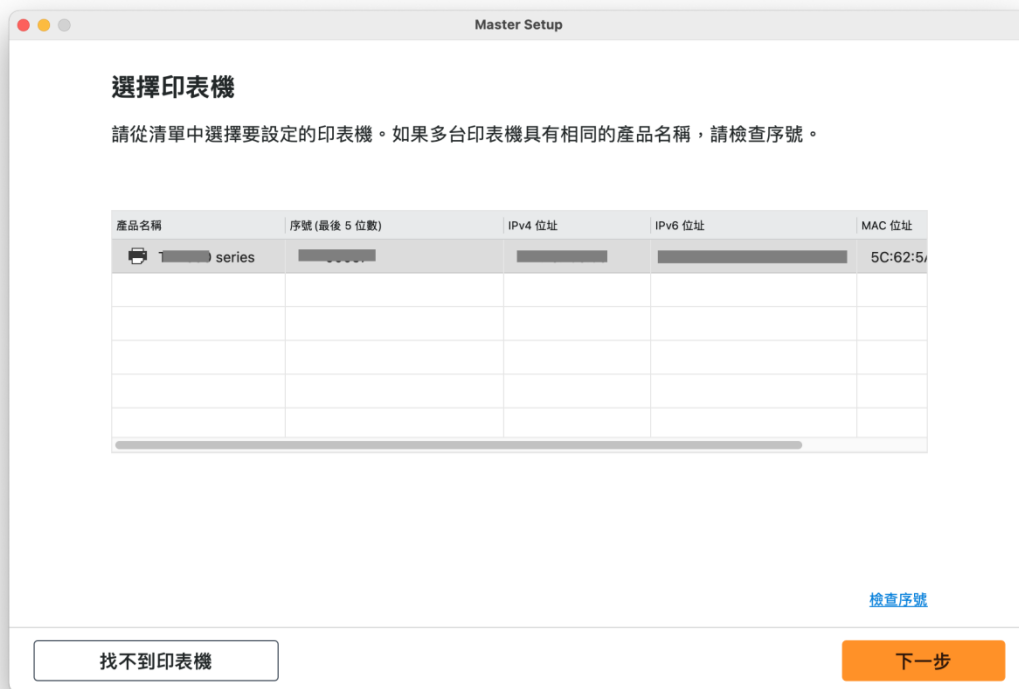

26. 再按〔繼續〕
Click [Continue] again



27. 成功偵查印表機後請等候安裝

Please wait for install after detect the printer




28. 請等候下載及安裝

Please waiting for download and install




29. 安裝後按〔新增印表機〕

Click [Add Printer] after installation

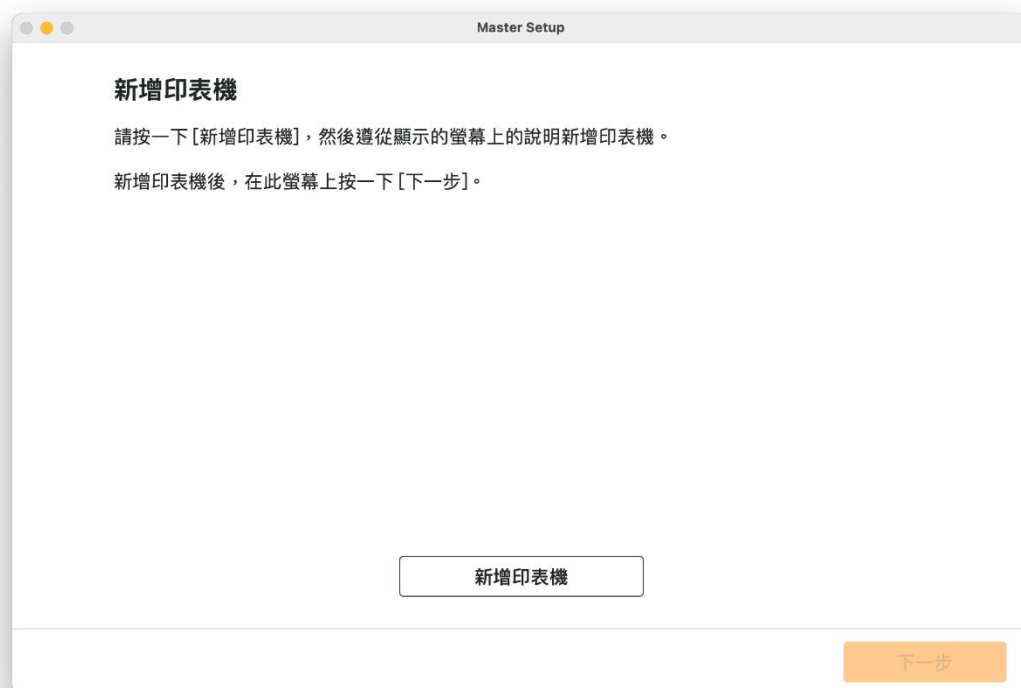


30. 選擇〔Canon PRO-200S series〕，再按〔加入〕

Choose [Canon PRO-200S series], then click [Add]

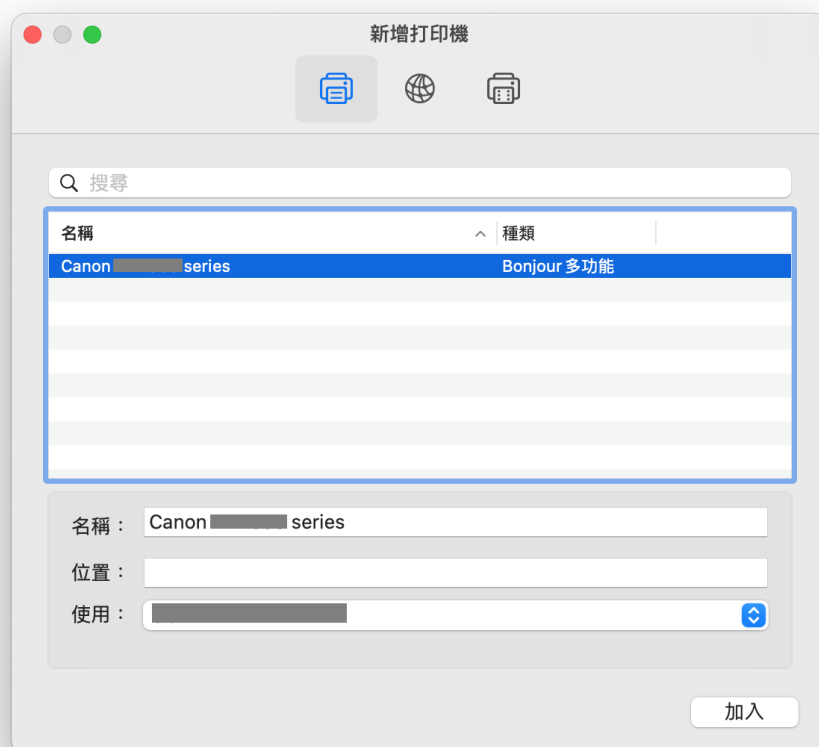

31. 請等候
Please wait

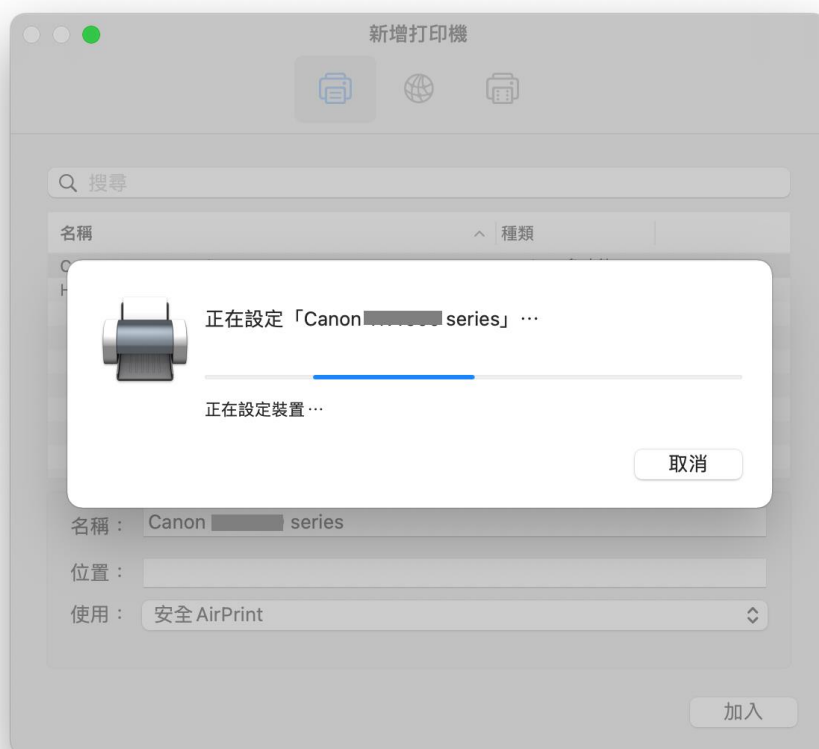


32. 新增印表機後按〔下一步〕
Click [Next] after add printer




33. 按〔下一步〕繼續

Click [Next] to continue

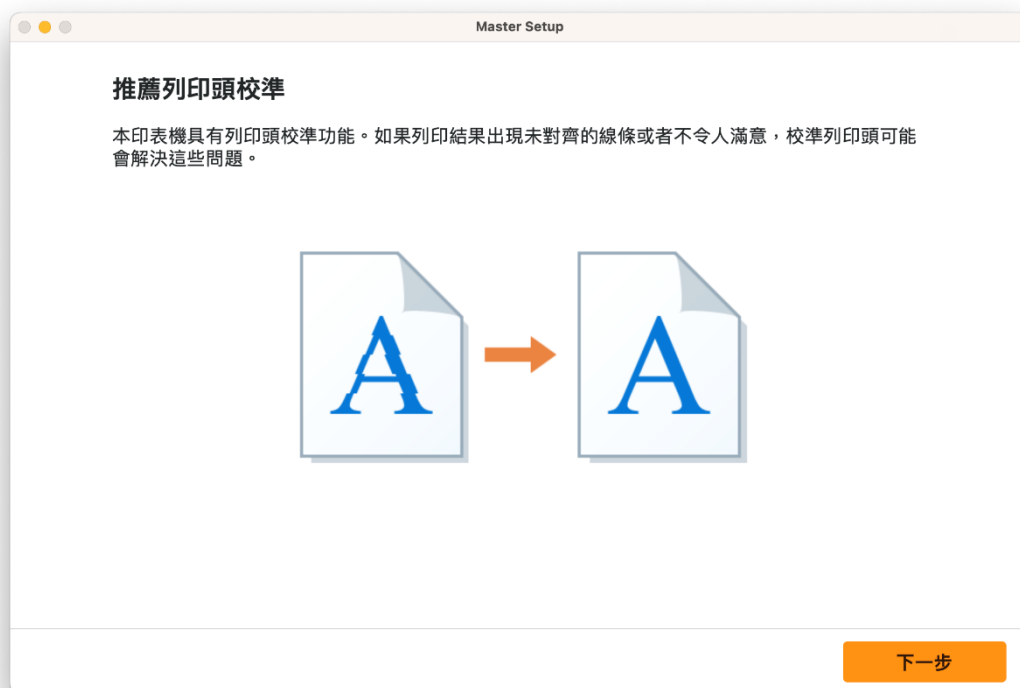


34. 請等候

Please wait

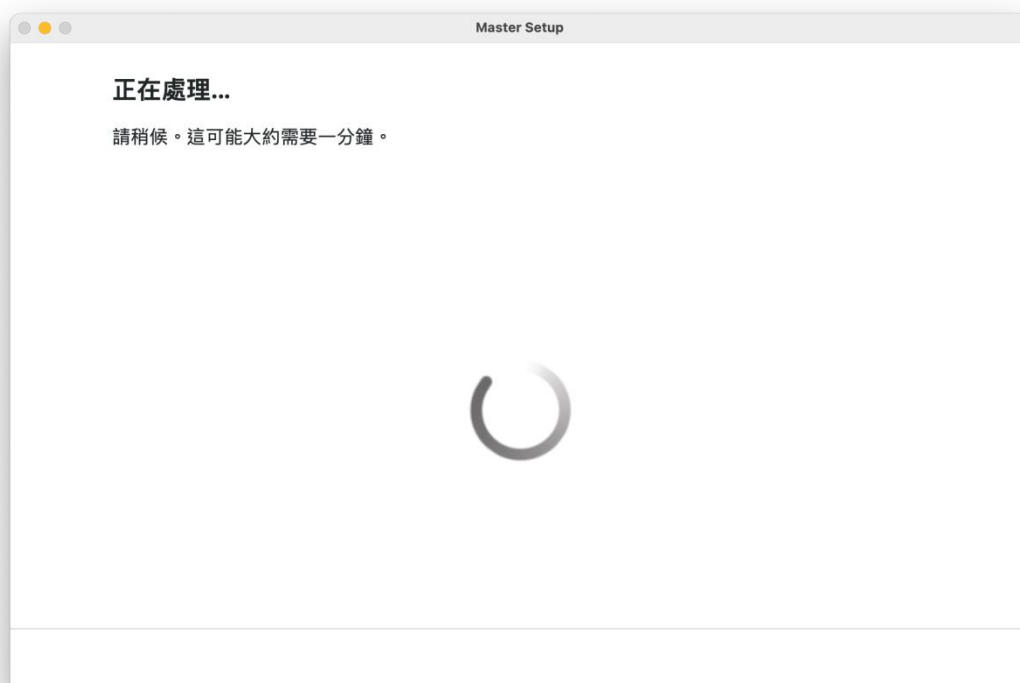

35. 安裝完成，按〔下一步〕
Installation complete, click [Next]

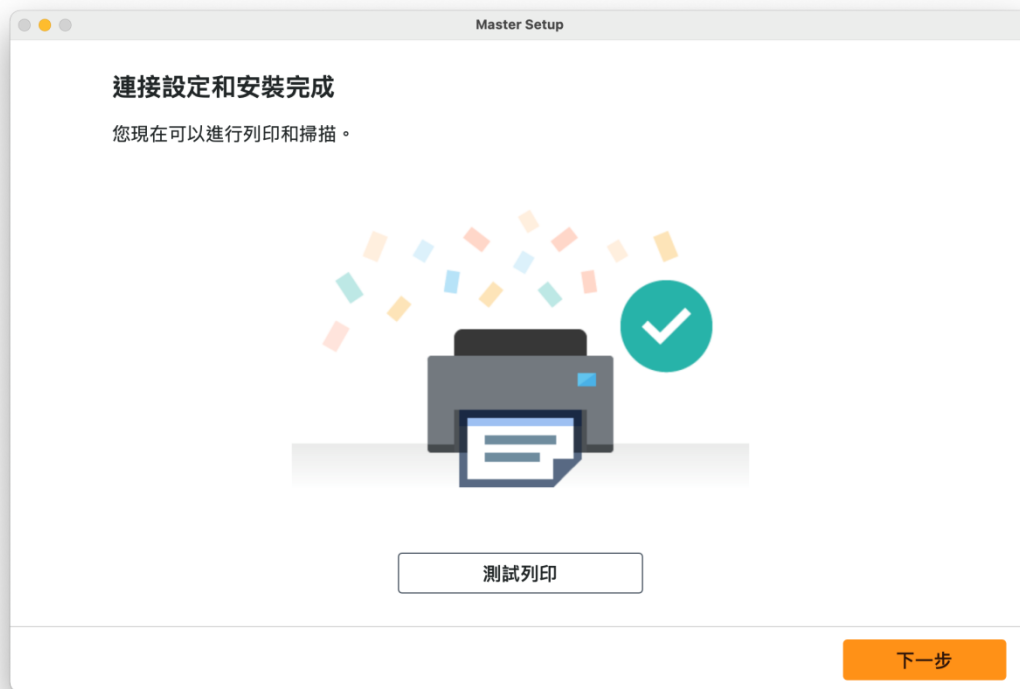

36. 安裝完成
Driver installation was completed



-完-
-End-