

MF664Cdw, MF465dw II 在 Windows 透過 WiFi 連線連接印表機之驅動程式步驟
Driver installation procedure for MF664Cdw, MF465dw II in Windows (Via Wi-Fi)


以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。
The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.



先將打印機連接到網路，詳細可參考以下步驟

Connect printer to network first, please refer to following procedure

1. 開啟印表機

Turn on the printer

2. 在主畫面中點選「有線 / 無線」 [] / []

Tap “Wired / Wi-Fi” icon in the Home Screen [] / []

3. 點選 <Wi-Fi 設定>

Tap “Wi-Fi Settings”

4. 選擇無線區域網路路由器名稱(SSID)

Select the wireless router’s signal (SSID)



5. 使用數字鍵輸入網路金鑰（路由器密碼），然後點選 <套用>

Enter the network key using the numeric keys, and tap “Apply”

6. 設定完成時，會顯示「已連線」

Wait until message “Connected” is displayed

等待約 2 分鐘，直到本機的 IP 位址設定完成


Wait approximately 2 minutes until the IP address settings of the machine complete

下載及安裝步驟

Driver download and installation procedure

7. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式

Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver

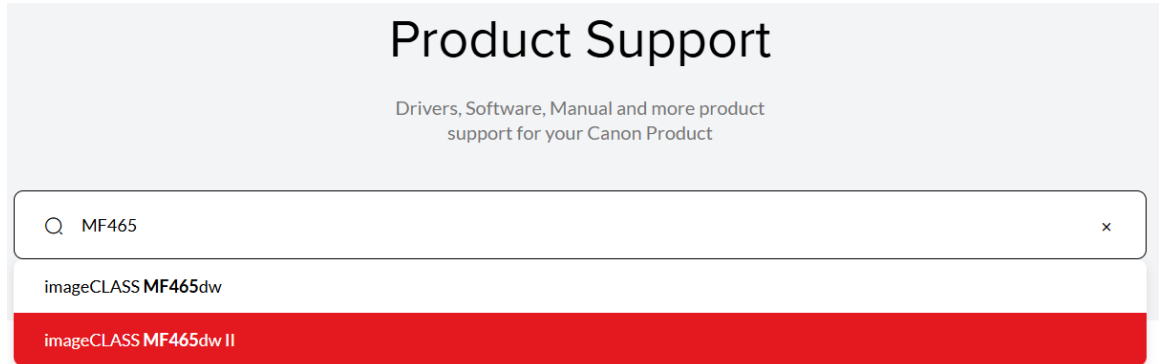


8. 選擇並下載以下檔案

Choose and download below files:


- 打印機驅動程式 / Printer Driver
[\[Windows 64bit\] Generic Plus UFR II Printer Driver VX.XX](#)
- 掃描驅動程式 / Scanner Driver
[\[Windows 64bit\] MF660 Series ScanGear MF Ver.XX.X.X.X.mfXX](#)
- 掃描軟件 / Scanning Software
[\[Windows 32bit & 64bit\] MF Scan Utility Ver.*.*](#)

9. 執行檔案[Windows 64bit] Generic Plus UFR II Printer Driver VX.XX 內的 Setup.exe 按「Next」


Run File Setup.exe in [Windows 64bit] Generic Plus UFR II Printer Driver VX.XX, click "Next"

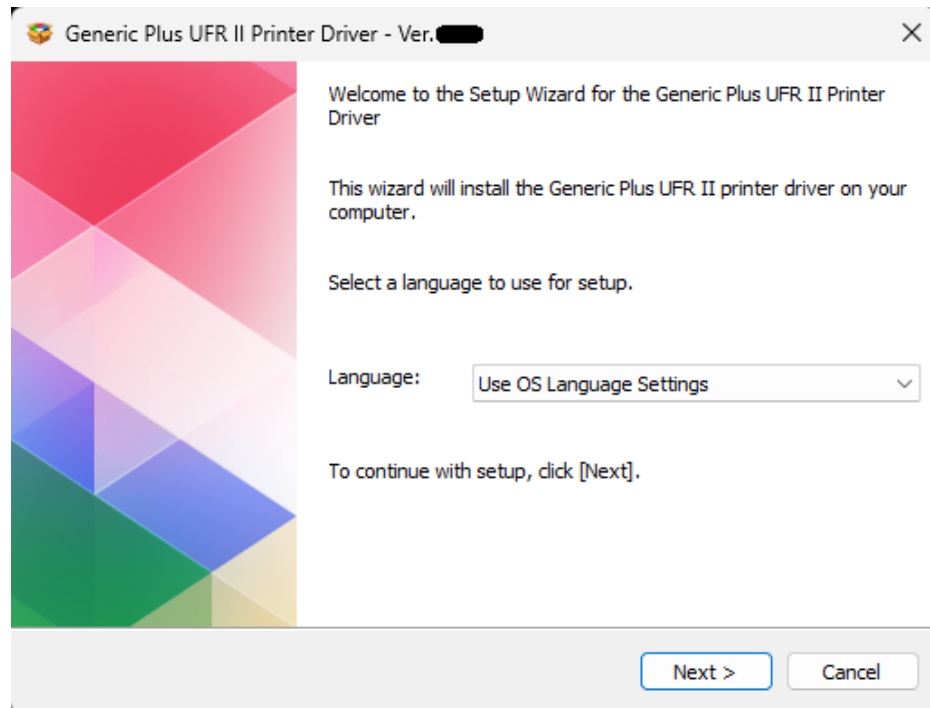


10. 按「Yes」
Click "Yes"

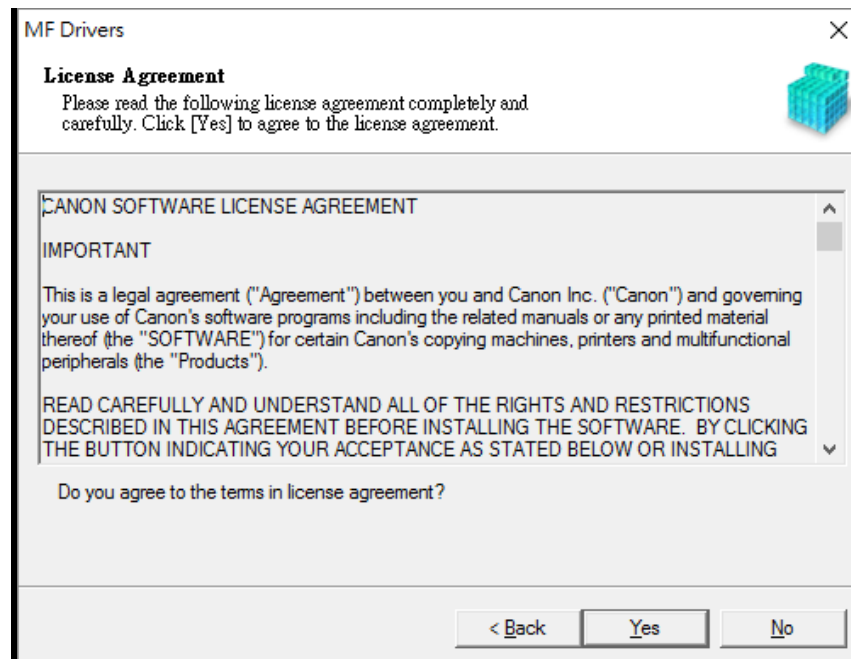


11. 選擇「Standard」，按「Next」
Choose "Standard", click "Next"

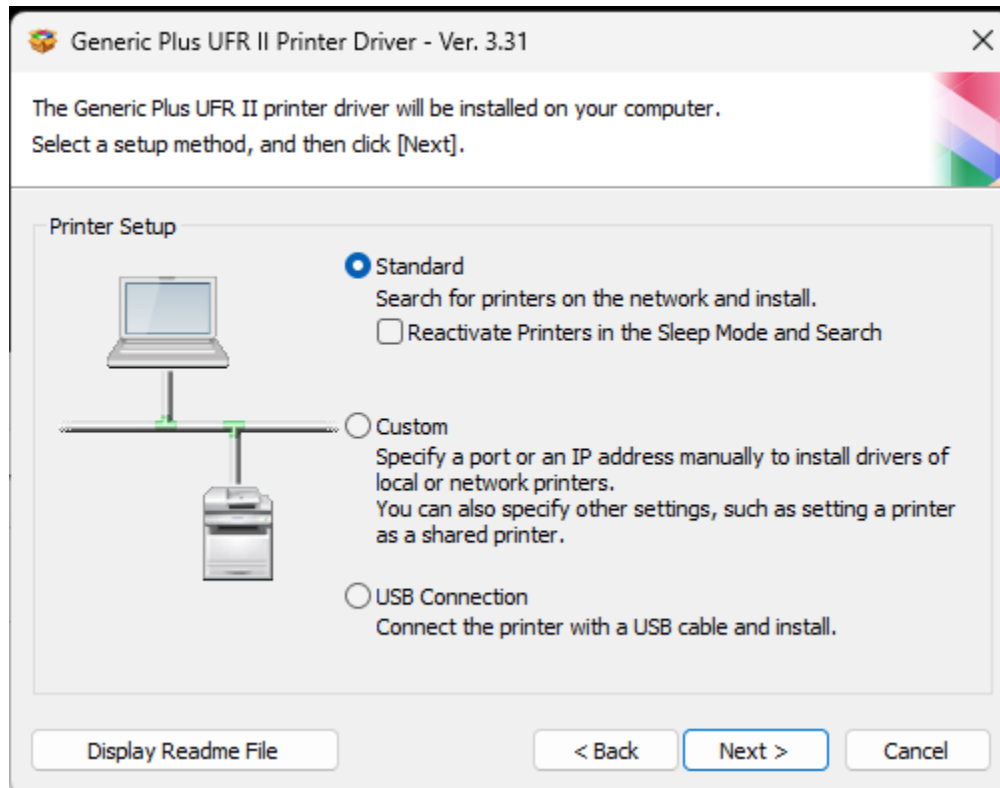


12. 按「是」
Click "Yes"

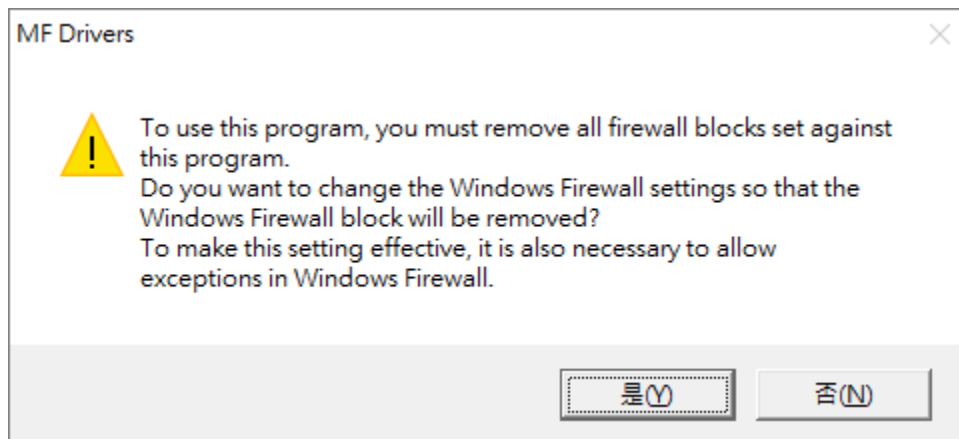

13. 程式會自動偵測網絡上的印表機，選擇後按「Next」
Program will automatic detect the network printer, choose printer and click "Next"

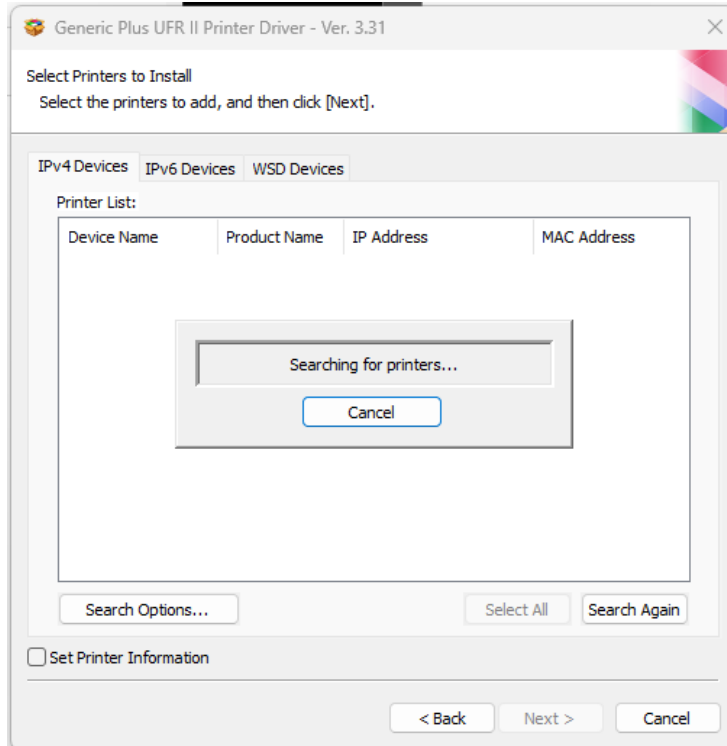


14. 按「Start」
Click "Start"

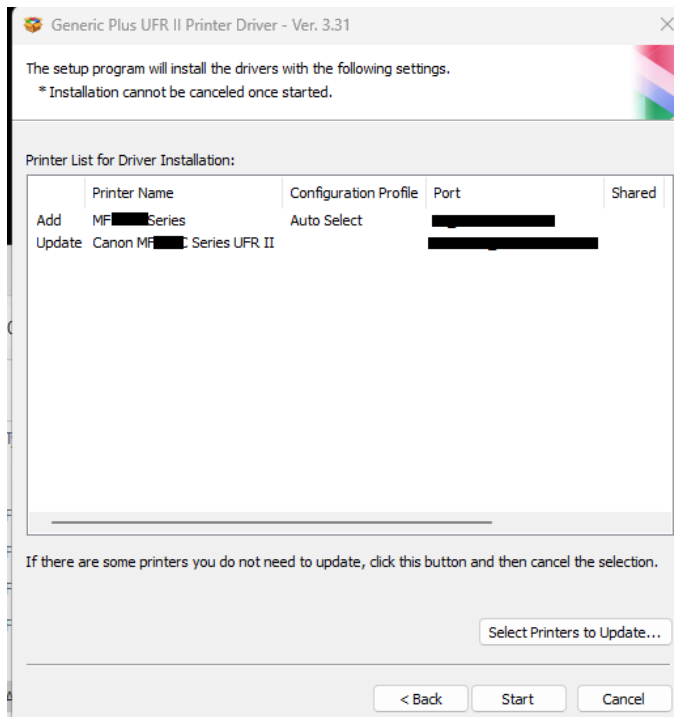


15. 等待安裝程序完成

Waiting for the installation progress

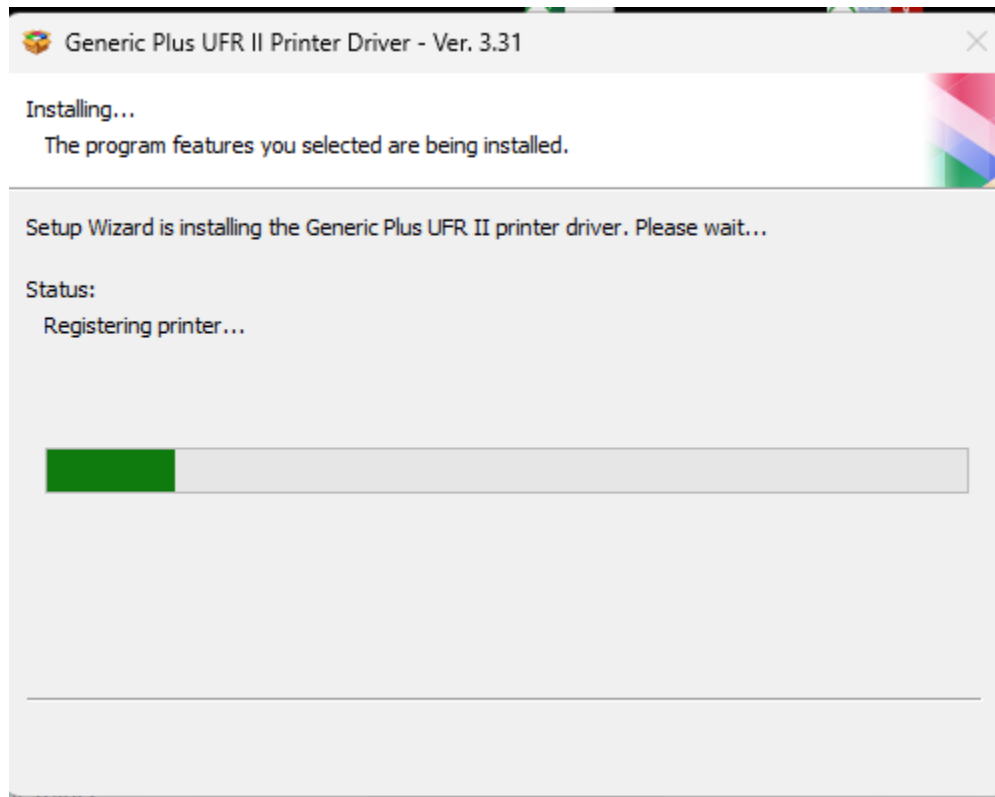

16. 按「是」重啟電腦

Click "Yes" to restart computer

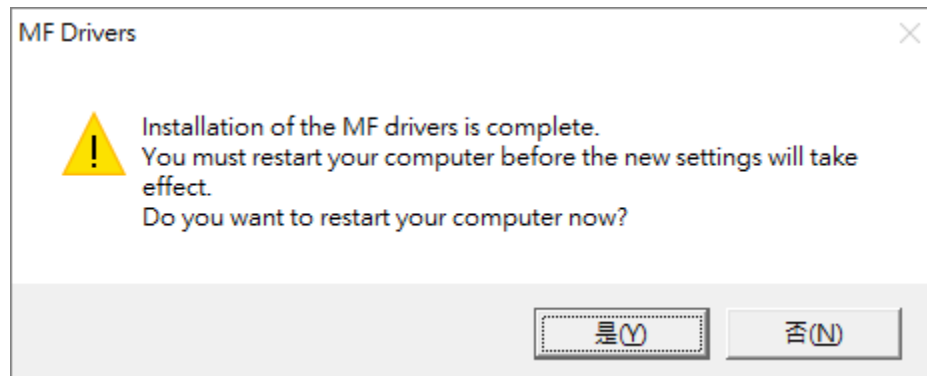


安裝掃描驅動程式 Install Scanner Driver


1. 執行檔案 [scangearmfvXXXXXmfXXxXXXX] 按「Next」
Run the file [scangearmfvXXXXXmfXXxXXXX] , click “Next”




2. 按「Yes」
Click “Yes”

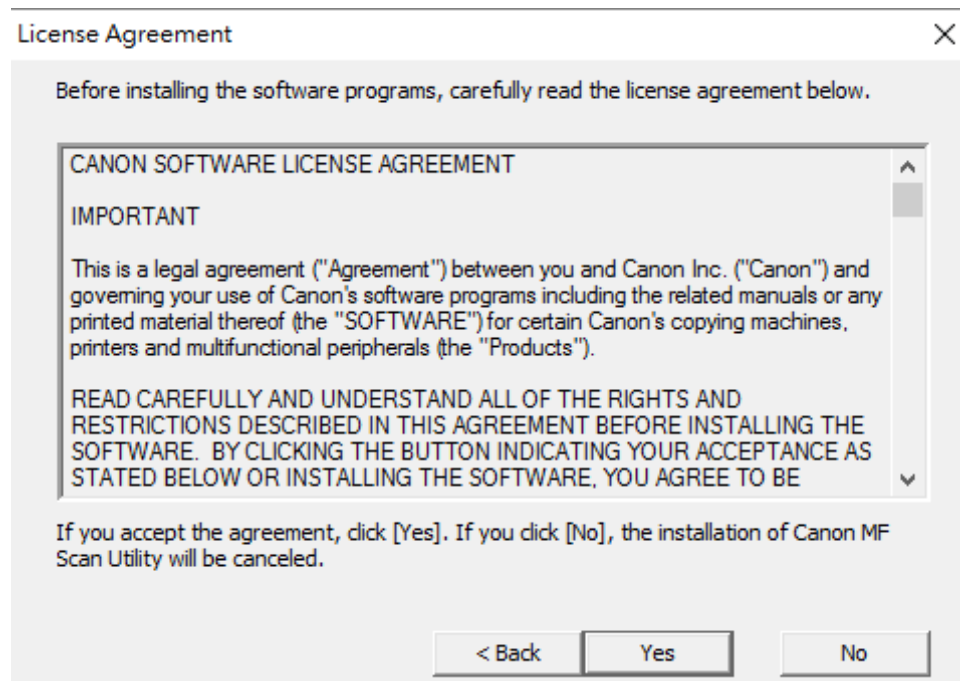


3. 選擇「Network Connection」，按「Next」
Choose “Network Connection”, click “Next”

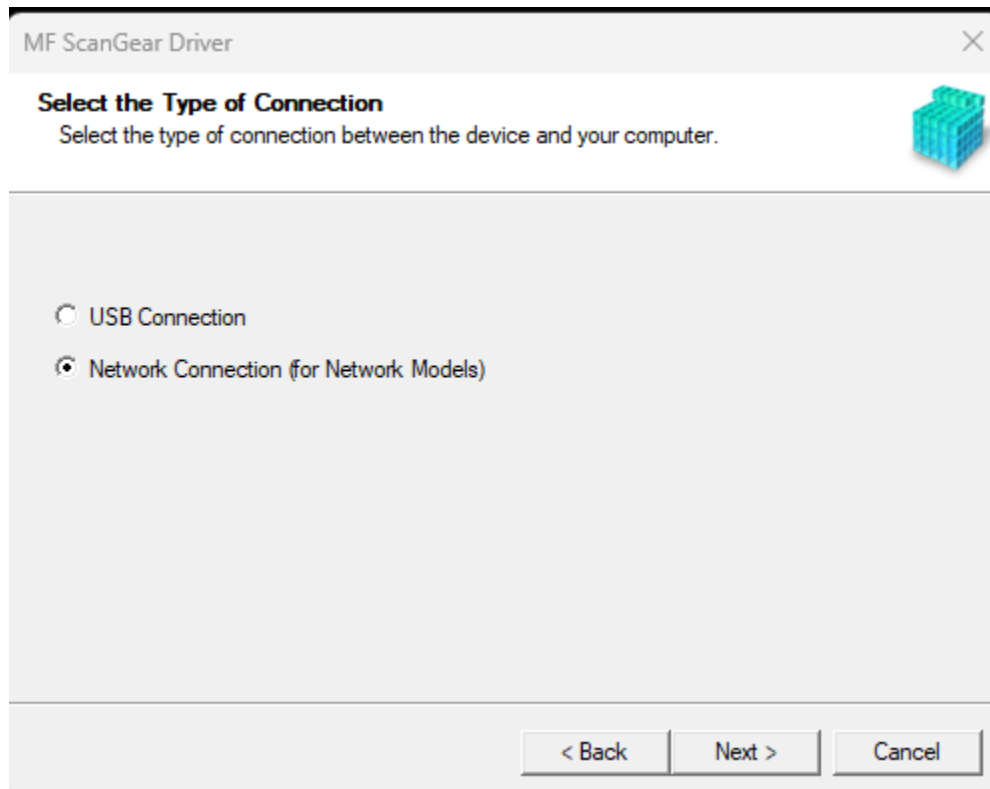


4. 按「是」
Click “Yes”

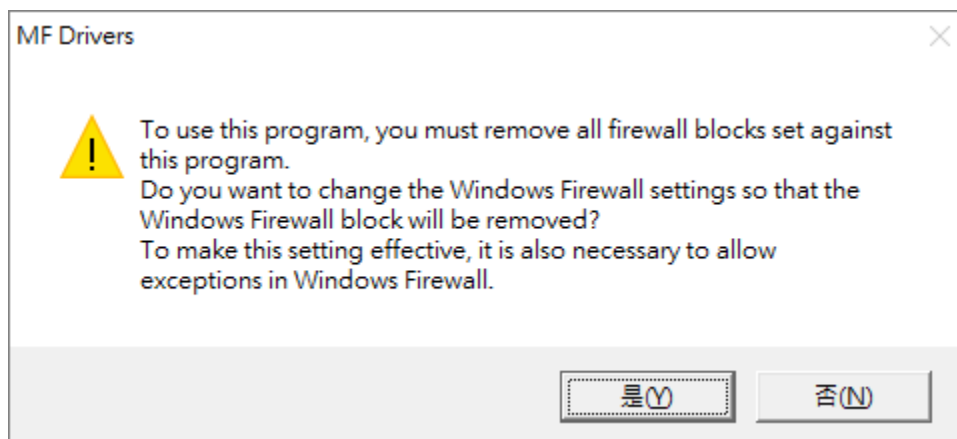

5. 程式會自動偵測網絡上的印表機，選擇後按「Next」
Program will automatic detect the network printer, choose printer and click "Next"

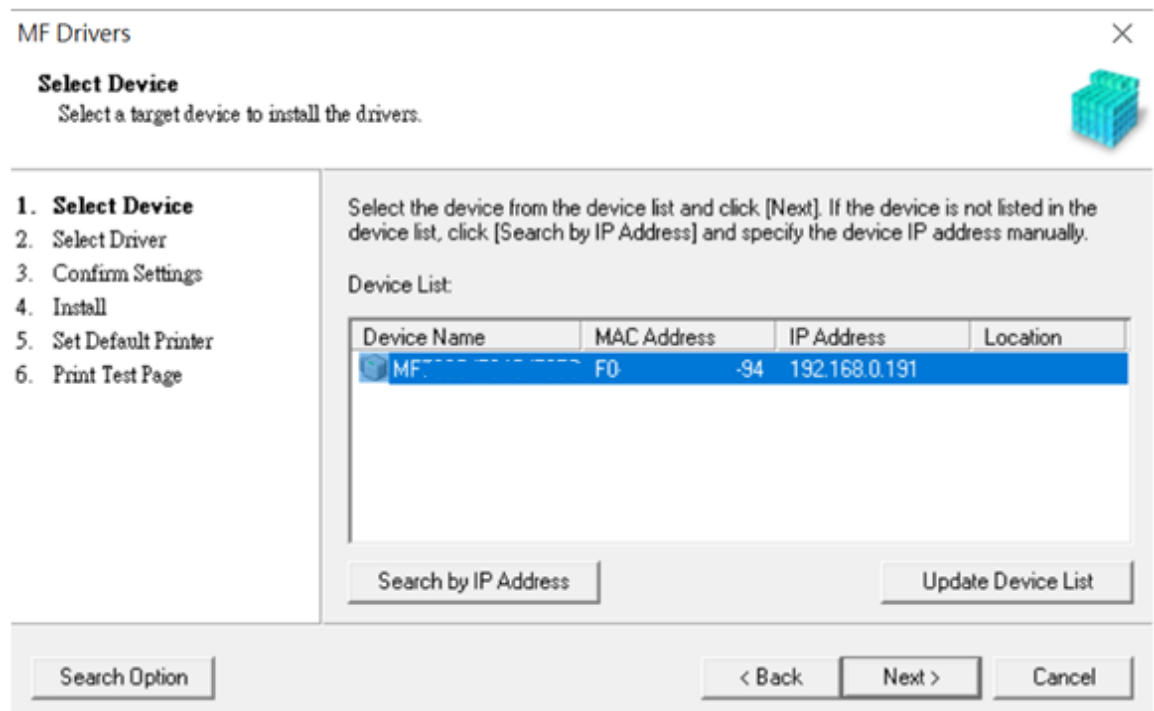


6. 等待安裝程序完成
Waiting for the installation progress

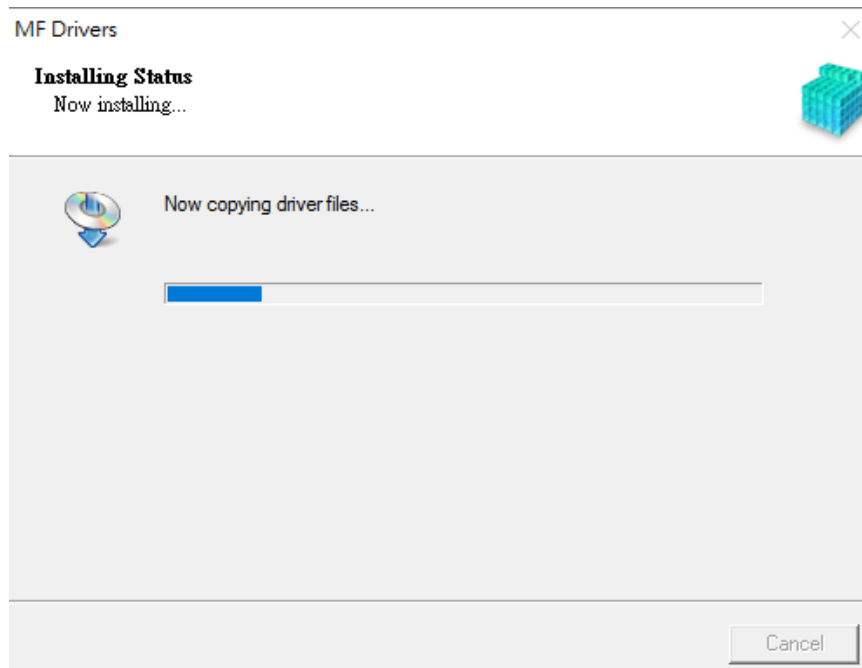


安裝掃描軟件MF Scan Utility
MF Scan Utility installation procedure

17. 執行檔案〔MFScanUtility_*****_EN.exe〕按「Next」
Run the file [MFScanUtility_*****_EN.exe], click "Next"

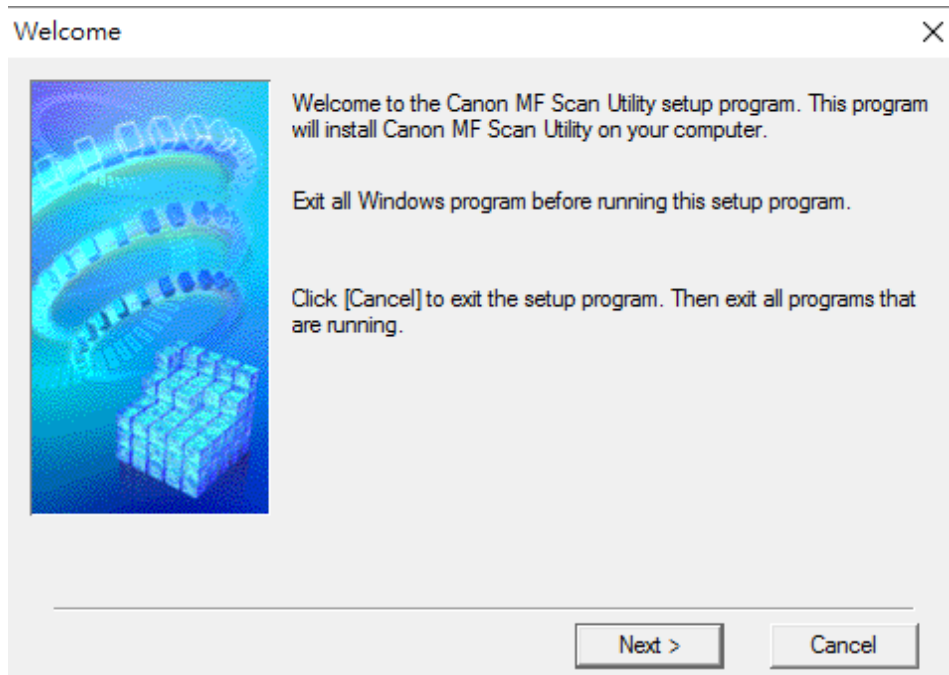

18. 按「Yes」
Click "Yes"

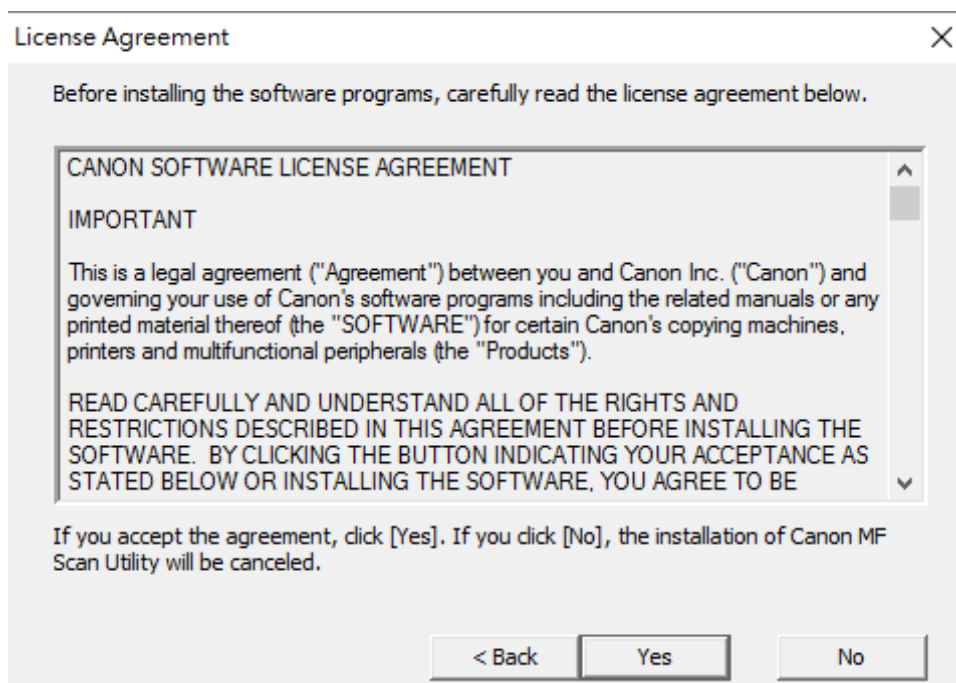


19. 等待安裝程序完成

Waiting for the installation progress

Install


C:\...\MF Scan Utility\icudt40.dll



20. 按「Complete」完成安裝

Click "Complete" to finish installation

Installation Complete

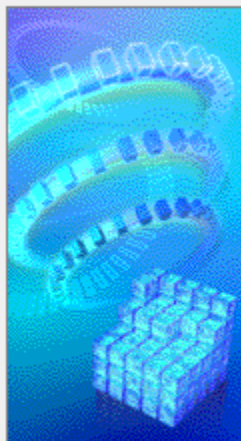

Installation of Canon MF Scan Utility completed successfully.

Click [Complete] to exit the setup program.

Complete

-完-
-End-