


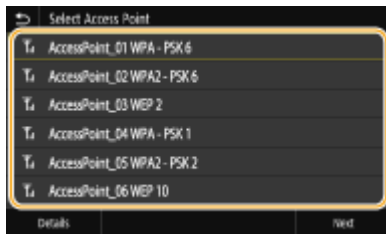
MF664Cdw, MF465dw II 在 macOS 透過無線 Wi-Fi 連線連接印表機之驅動程式步驟 **Driver installation procedure for MF664Cdw, MF465dw II in macOS (Via Wireless LAN)**

以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。
The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.

先將打印機連接到網路，詳細可參考以下步驟

Connect printer to network router first, please refer to following procedure

1. 開啟印表機
Turn on the printer
2. 在主畫面中點選「有線 / 無線」 [] / []
Tap “Wired / Wi-Fi” icon in the Home Screen [] / []
3. 點選 <Wi-Fi 設定>
Tap “Wi-Fi Settings”
4. 選擇無線區域網路路由器名稱(SSID)
Select the wireless router’s signal (SSID)



5. 使用數字鍵輸入網路金鑰（路由器密碼），然後點選 <套用>
Enter the network key using the numeric keys, and tap “Apply”
6. 設定完成時，會顯示「已連線」
Wait until message “Connected” is displayed

等待約 2 分鐘，直到本機的 IP 位址設定完成

Wait approximately 2 minutes until the IP address settings of the machine complete

下載及安裝步驟

Driver download and installation procedure

7. 到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式

Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver




8. 選擇並下載以下檔案

Choose and download below files

- 打印機驅動程式 / Printer Driver
〔 UFR II/UFRII LT Printer Driver & Utilities for Macintosh VXXXXXX 〕
- 掃描器驅動程式 / Scanner Driver
〔 Scanner Driver & Utilities for Macintosh VXXXXXX 〕

9. 下載完成後開啟檔案 [mac-UFR11-vXXXXXX] ，按「 MF_Printer_Installer.pkg 」
Open the downloaded file [mac-UFR11-vXXXXXX] , press “MF_Printer_Installer.pkg”

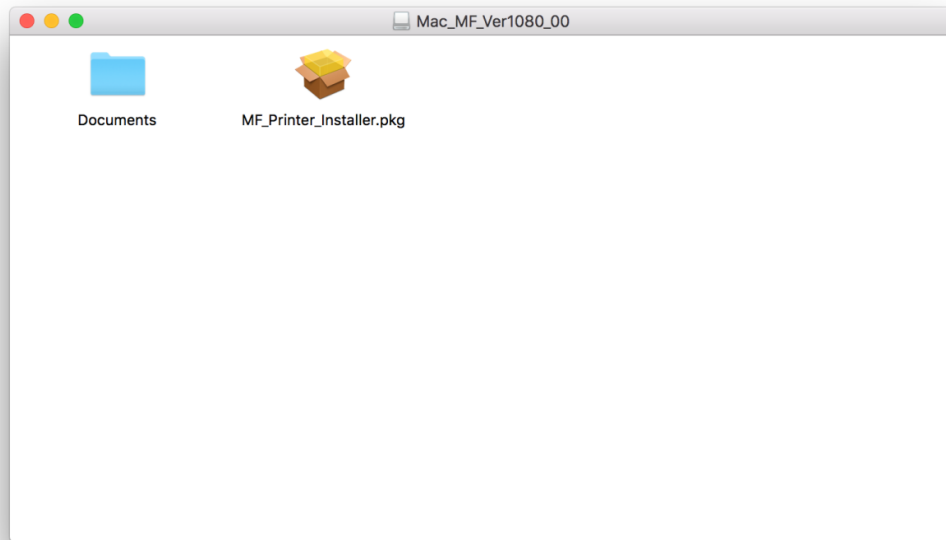


10. 按「繼續」
Choose “Next”




11. 按「繼續」然後按「同意」
Choose “Next” and then choose “Agree”




12. 按「安裝」
Choose “Install”

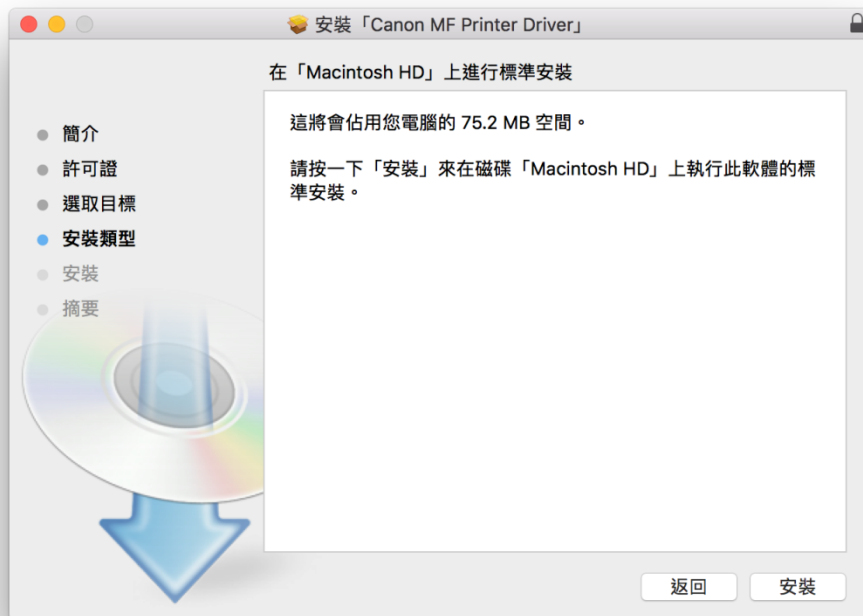


13. 等待安裝程序完成
Waiting for the installation progress

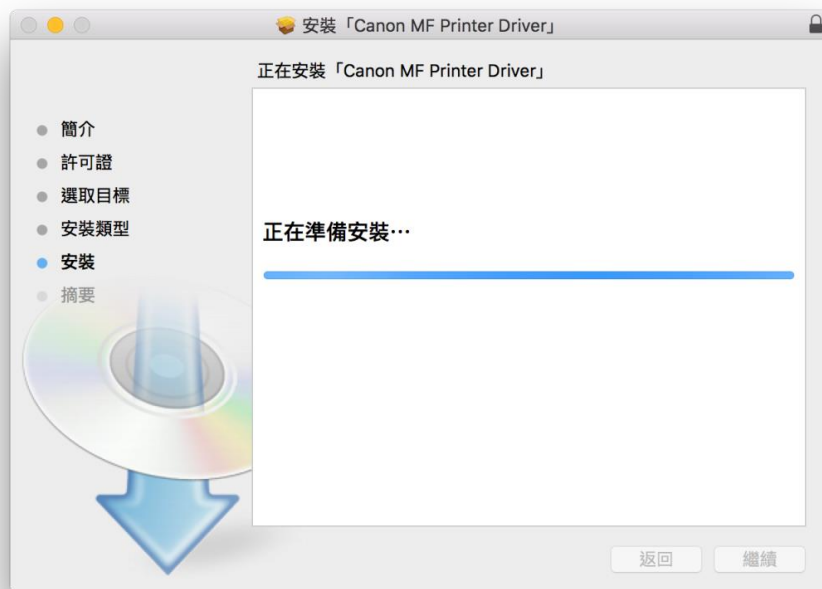

14. 按「關閉」
Choose "Close"

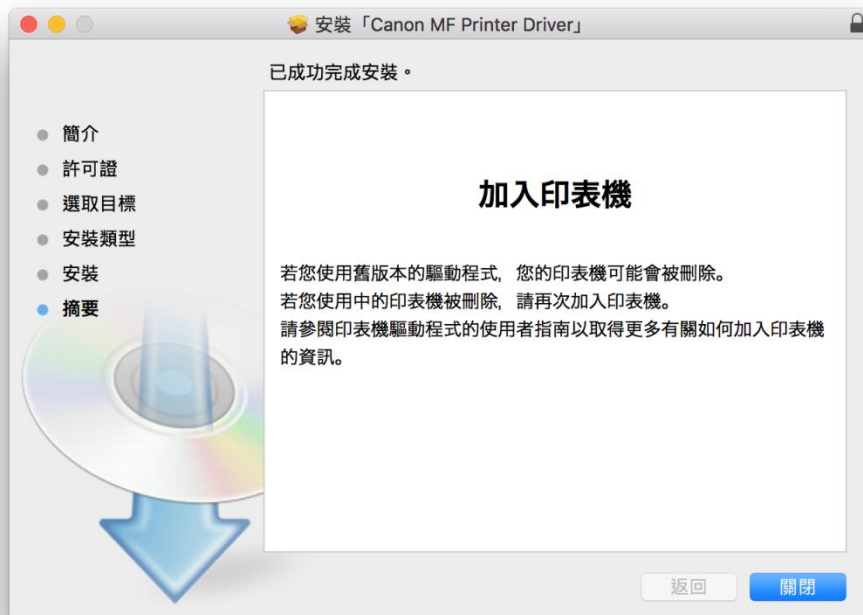

15. 開啟檔案 [mac-scan-vXXXXXX] ，按 「 Canon_ScanGear_MF.pkg 」
Open file [mac-scan-vXXXXXX] , press “Canon_ScanGear_MF.pkg”

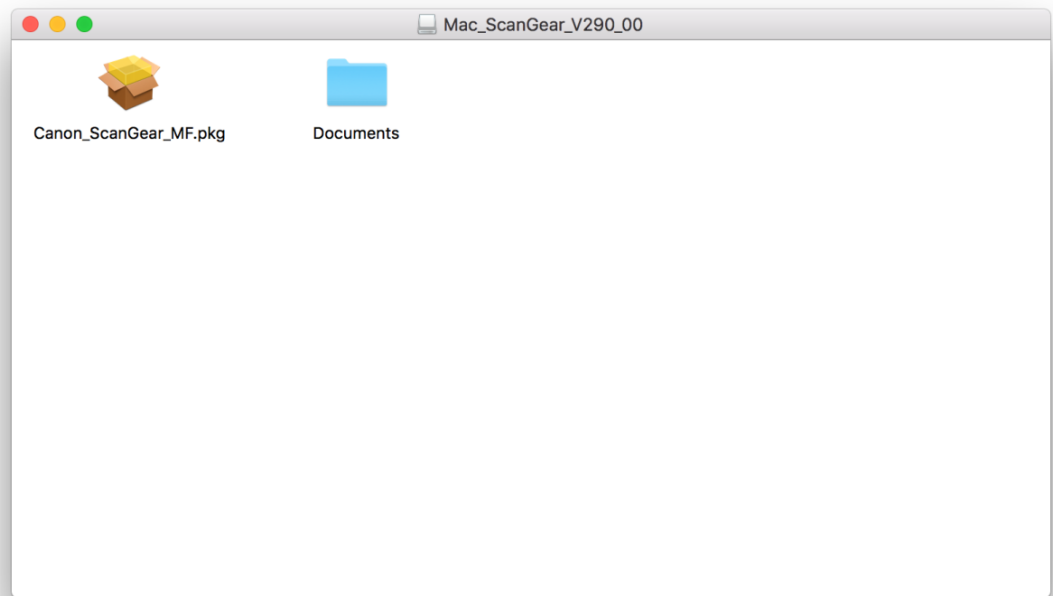


16. 按「繼續」
Choose “Continue”




17. 按「繼續」然後按「同意」
Choose “Continue” and then choose “Agree”




18. 按「安裝」
Choose “Install”

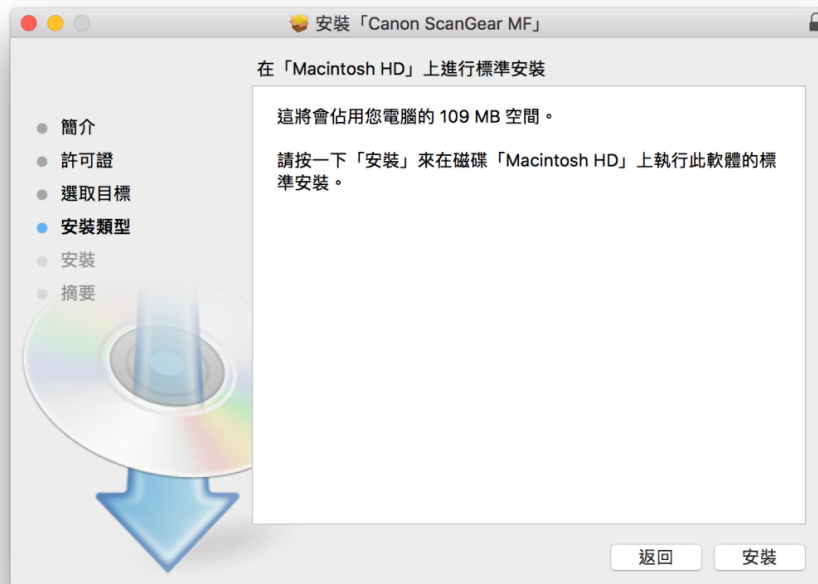

19. 等待完成安裝 程序
Waiting for the installation progress

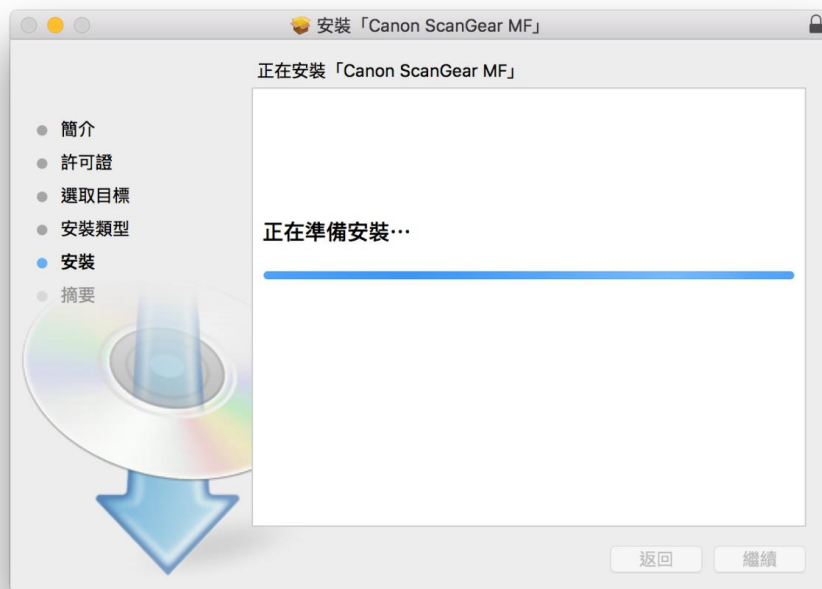

20. 按「關閉」
Choose "Close"

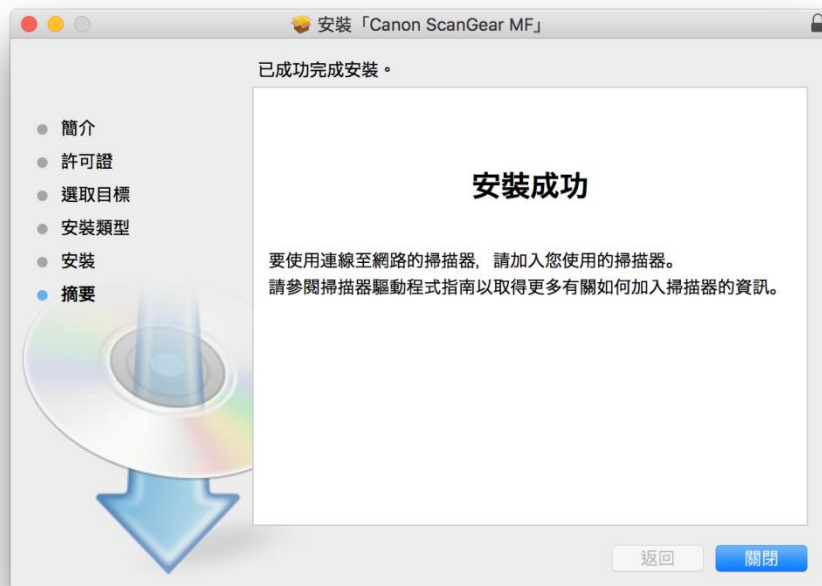


21. 完成安裝驅動程式後需新增印表機，到「系統偏好設定」，選「印表機與掃描器」
Go to “System Preferences” and open “Printer and Scanner”




22. 選取左下角「+」按鈕，選「加入印表機或掃描器」
Click the “+” button and select “Add printer or Scanner”



23. 名稱選擇「Canon MF664C/MF465 series」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF664C/MF465 series」按「加入」，新增印表機驅動程式
Choose the Name “Canon MF664C/MF465 series” with “Bonjour multifunction”, and confirm selected “Canon MF664C/MF465 series” in “Use”, then click “Add”

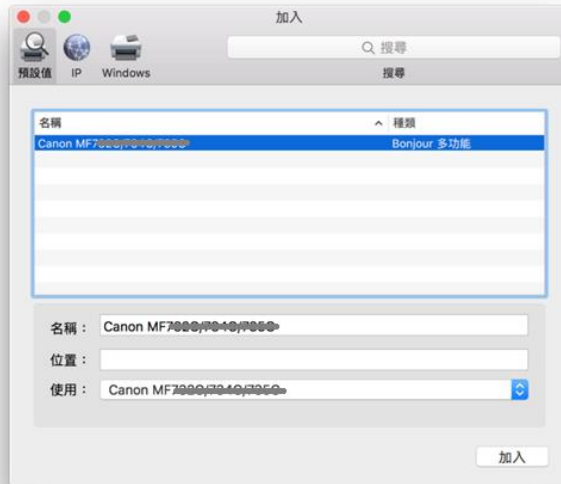

24. 再一次按左下角「+」按鈕，選「加入印表機或掃描器」，名稱選擇「Canon MF664C/MF465 series」，種類選擇「Bonjour 多功能」，使用選擇「Canon MF664C/MF465 series FAX」按「加入」，新增傳真驅動程式
To add FAX driver , Click the “+” button and select “add printer or scanner, choose the name “Canon MF664C/MF465 series “Bonjour multifunction”, and confirm selected “Canon MF664C/MF465 series FAX” in “Use”, then click “Add”

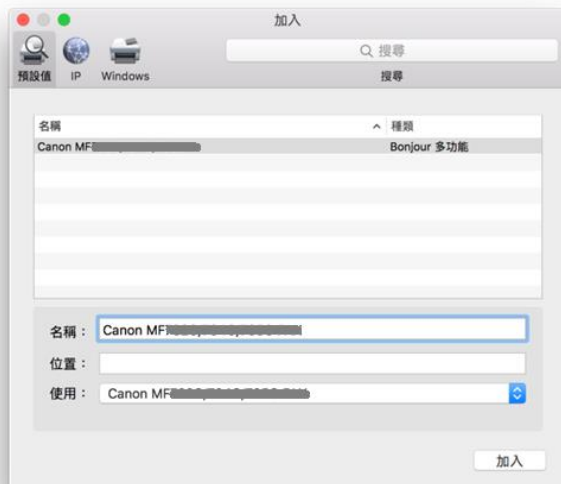

26. 選擇「Canon MF664C/MF465 series」，按「新增」
Choose “Canon MF664C/MF465 series” and then click “Add”



27. 完成以上設定後已可使用印表機作打印、傳真及掃描功能
Setup completed. Print, fax and scan functions are ready to use

-完-
-End-