


LBP122dw II, LBP121dn II 在 Windows 透過 LAN 連線連接印表機之驅動程式步驟
Driver installation procedure for LBP122dw II, LBP121dn II in Windows (Via Wired LAN)

以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。
The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.

先將打印機連接到網路，詳細可參考以下步驟

Connect printer to network first, please refer to following procedure

1. 開啟印表機
Turn on the printer
2. 在控制面板上，選擇畫面中的 [MENU] 按下 OK
On the control panel, select [Menu] in the [Home] screen, and press [OK]
3. 選擇 [偏好設定] > OK > [網路] > OK > [選擇有線 LAN/Wi-Fi] > OK
Press [Preferences] > OK [Network] > OK > [Select Wired LAN/Wi-Fi]
4. 選擇[有線 LAN]並按下 OK
Select [Wired LAN] and press OK
5. 使用區域網路纜線將本機連接到路由器，推入接頭，直至聽到喀嗒聲
Connect the machine to router by using a LAN cable, push the connector in until it clicks into place

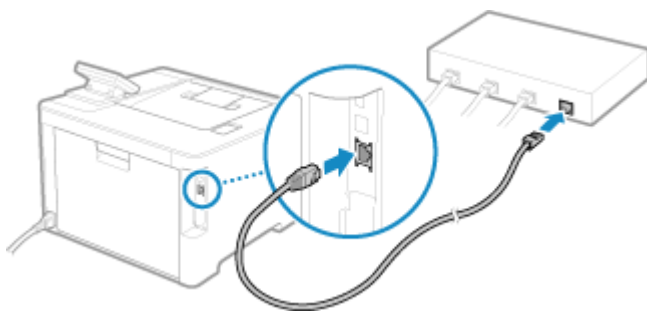

等待約 2 分鐘，直到本機的 IP 位址設定完成


Wait approximately 2 minutes until IP address settings of the machine complete

下載及安裝步驟

Driver download and Installation procedure

到佳能網站 <https://hk.canon/en/support>，選擇相關的印表機型號及下載印表機的驅動程式


Go to: <https://hk.canon/en/support>, select related printer model, then download the printer driver

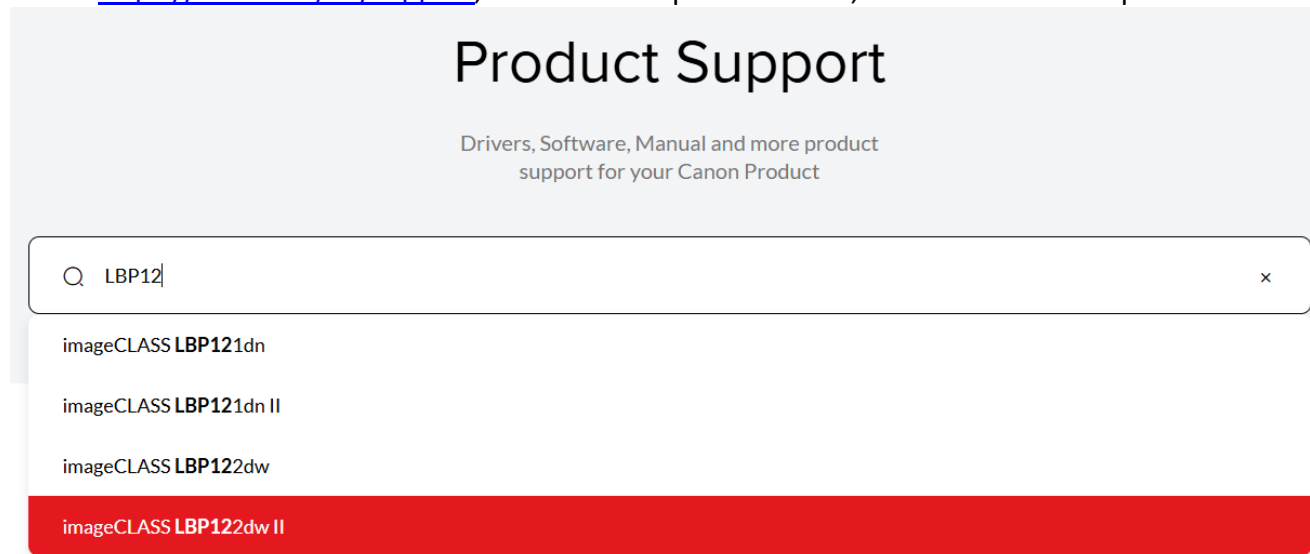

6. 選擇並下載以下檔案


Choose and download below file:

- 打印機驅動程式 / Printer Driver

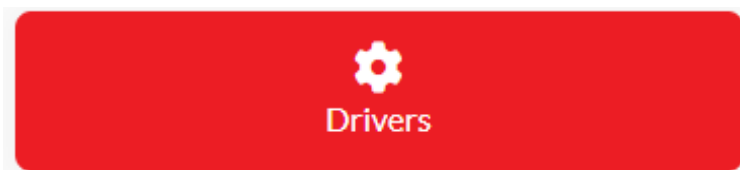


[Windows x64bit] Generic Plus UFR II Printer Driver Vx.xx

7. 打開下載的資料夾，然後執行檔案〔GPlus_UFRIL_Driver_XXXXXX.exe〕並等候解壓縮。
Open the download folder, then run the file [GPlus_UFRIL_Driver_XXXXXX.exe], and wait for unzip

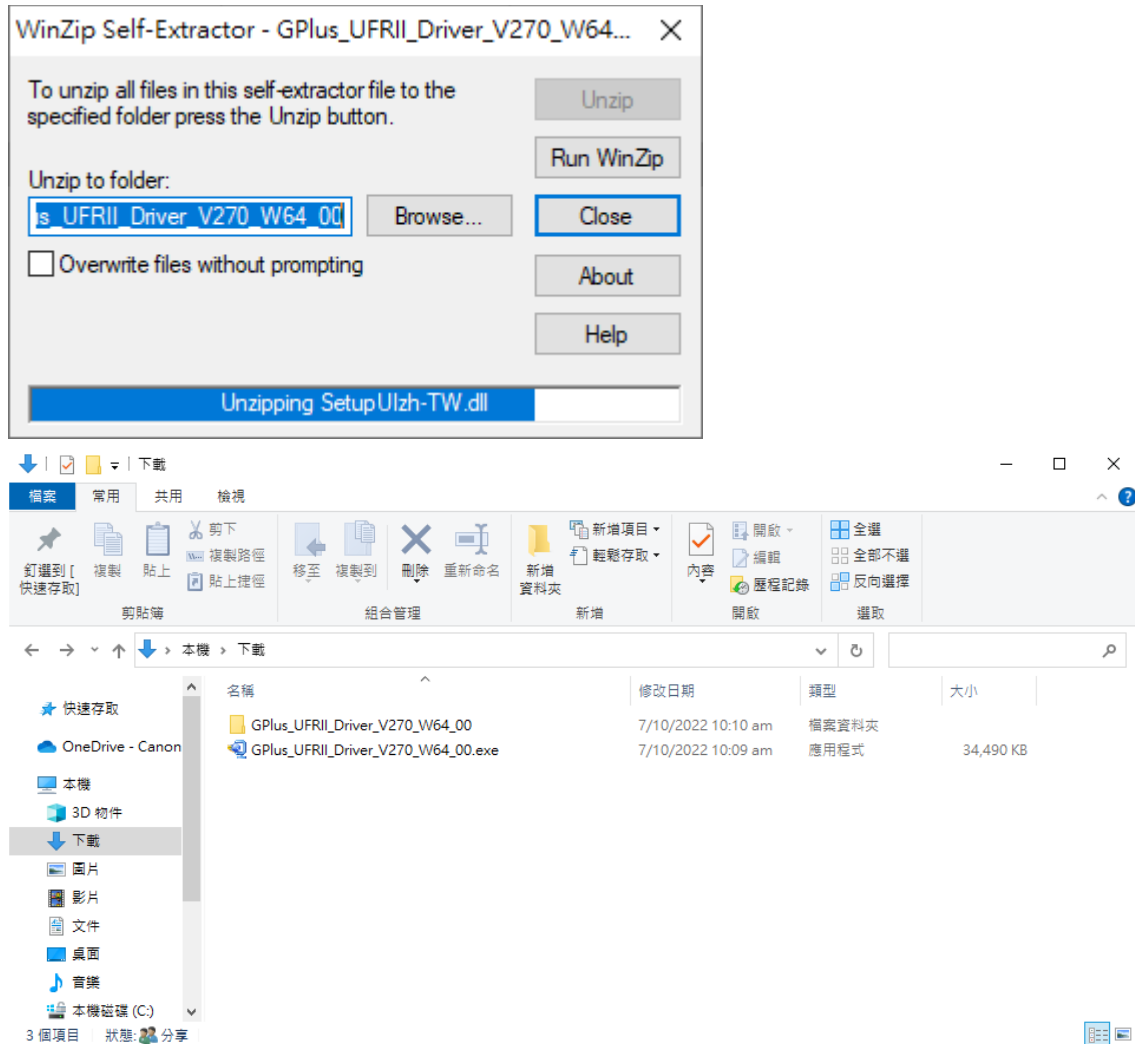

8. 打開〔GPlus_UFRIL_Driver_XXXXXX〕資料夾，開啟〔Setup.exe〕檔案並安裝
Go into folder [GPlus_UFRIL_Driver_XXXXXX], open file [Setup.exe] and start installation

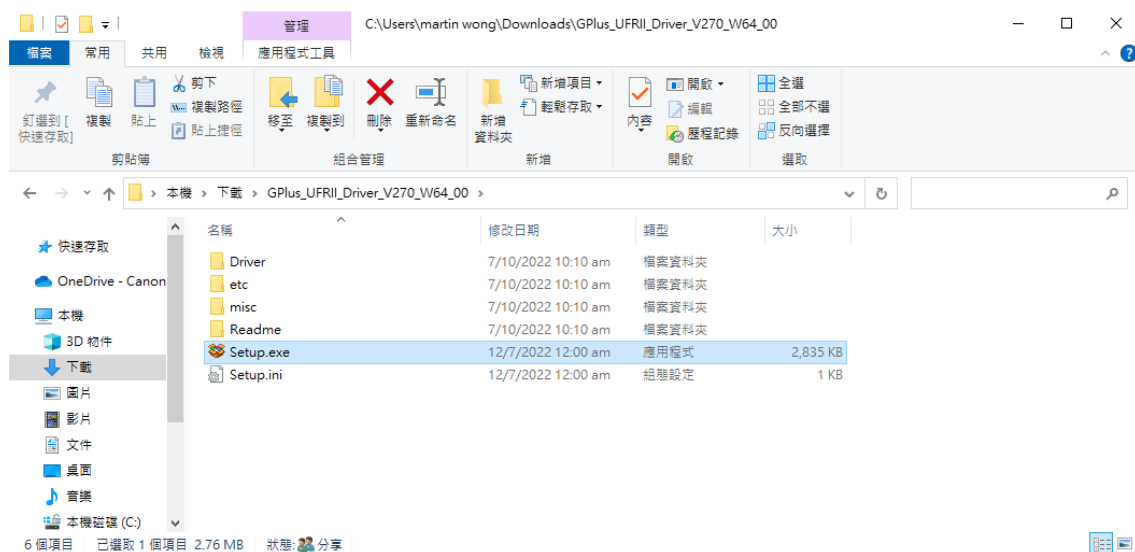


9. 按「下一步」

Click "Next"




10. 按「Yes」

Click "Yes"

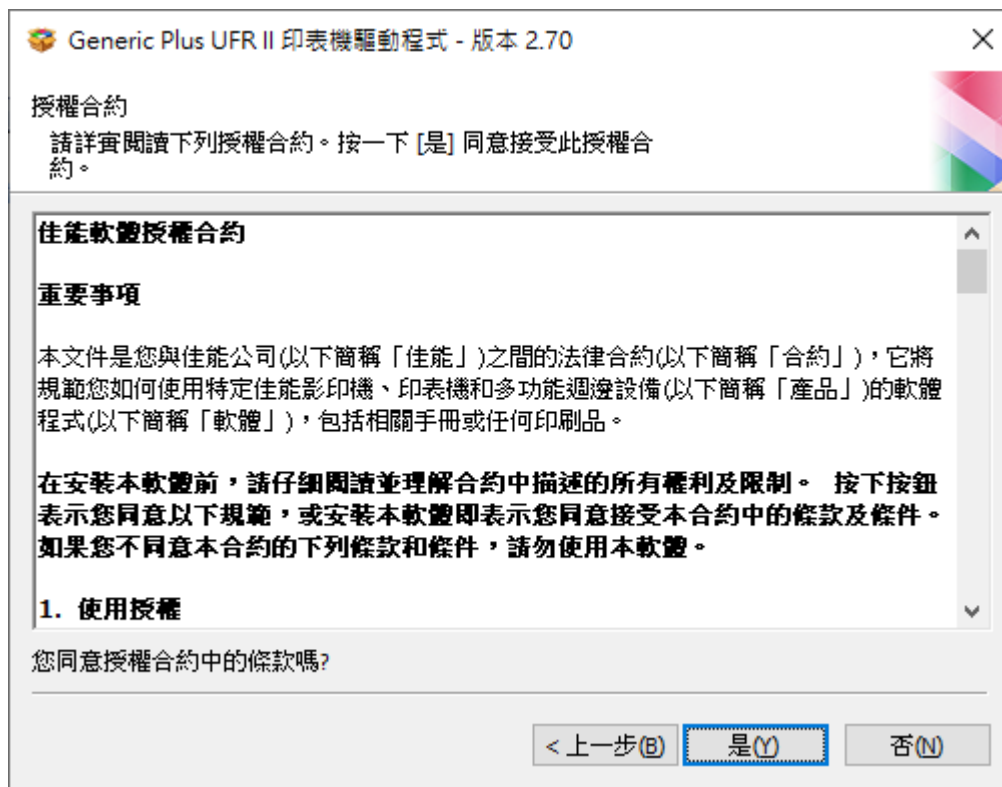

11. 選擇「標準」，按「下一步」
Choose "Standard", click "Next"

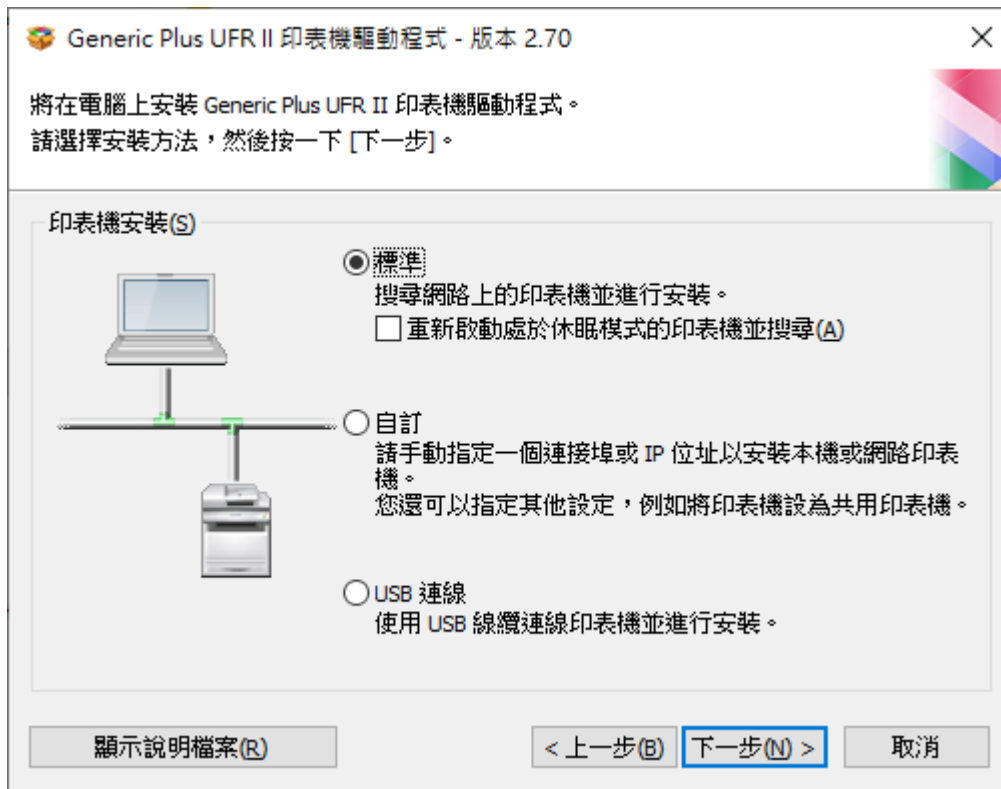

12. 按「下一步」
Click "Next"



13. 程式會自動偵測網絡上的印表機，選擇後按「下一步」

Program will automatic detect the network printer, choose printer and click “Next”



14. 按「啟動」

Click “Start”



15. 等待安裝程序完成

Waiting for the installation progress



16. 按「離開」完成安裝

Click "Exit" to finish install



-完-
-End-